

ACCU ELECTRIC MOTORS INC

USA: (888) 932-9183

CANADA: (905) 829-2505

- ✓ Over 100 years cumulative experience
- ✓ 24 hour rush turnaround / technical support service
- ✓ Established in 1993



The leading independent repairer of servo motors and drives in North America.

Visit us on the web:

www.servo-repair.com

www.servorepair.ca

www.ferrocontrol.com

www.sandvikrepair.com

www.accuelectric.com

Scroll down to view your document!

For 24/7 repair services :

USA: 1 (888) 932 - 9183



Canada: 1 (905) 829 -2505

Emergency After hours: 1 (416) 624 0386

Servicing USA and Canada

405 619

Lenze

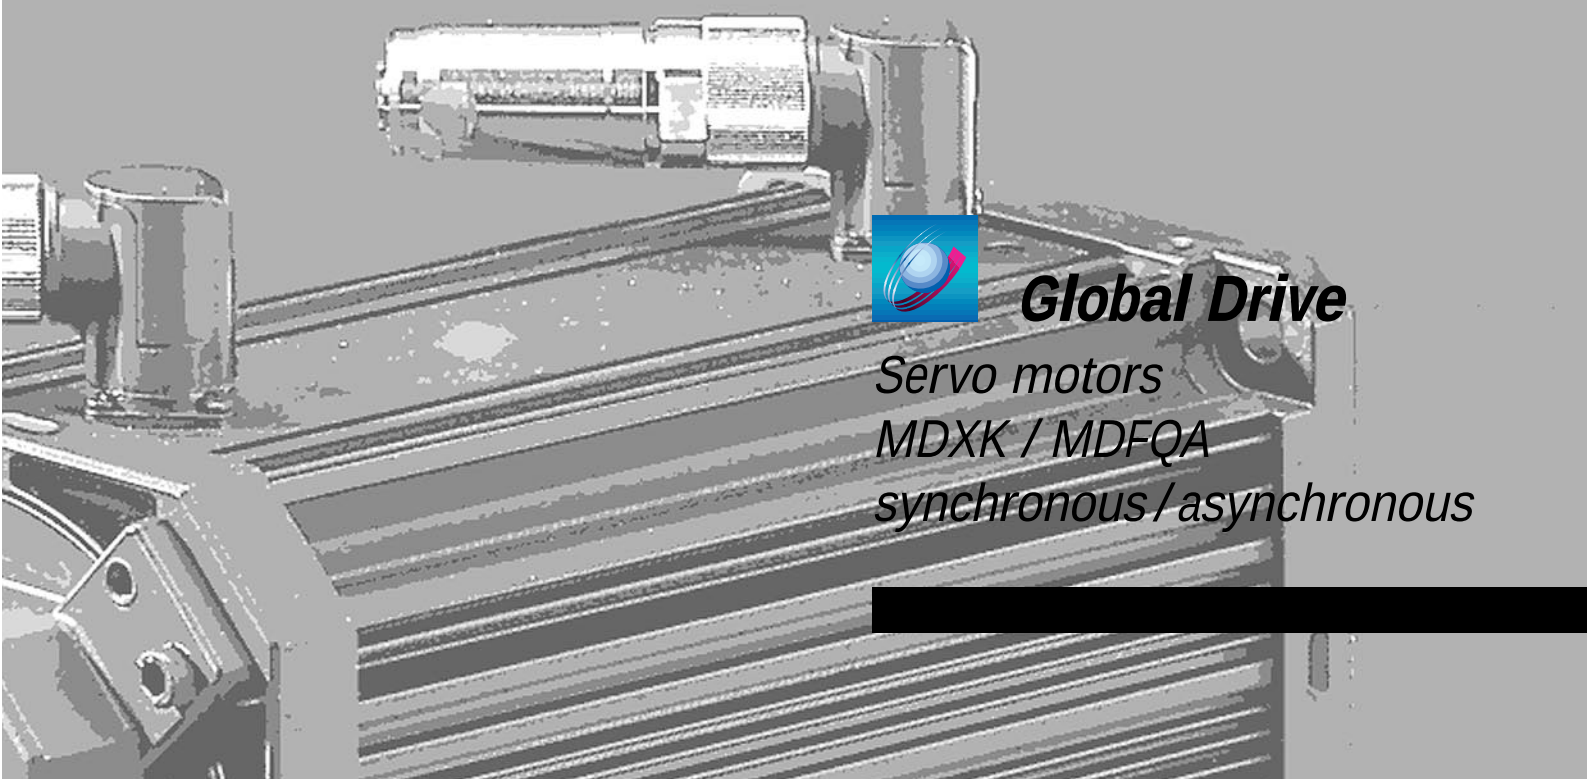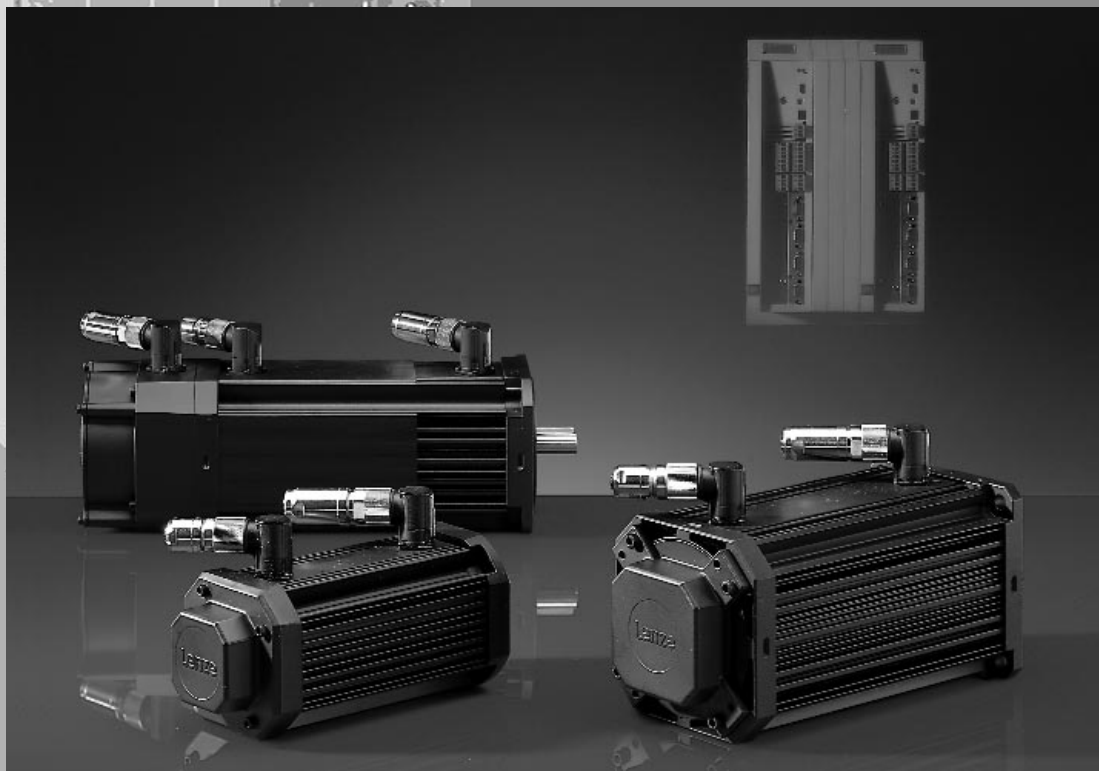

Global Drive

Servo motors

MDXK / MDFQA



synchronous / asynchronous

Servo motors

In the Global Drive System, asynchronous and synchronous motors perfectly match the controllers. Thanks to modular design and the planned options it is possible to select a suitable drive. Further assets of Global Drive servo motors are: small size, long life and high operational safety.

Comfortable system cables with plug-in connectors enable easy connection. Modern production processes ensure a good price / performance ratio.

This catalogue describes all preference types which are available within 15 working days as well as all industry types which require a delivery time of 30 working days. We would like to present further options of this modular design personally.

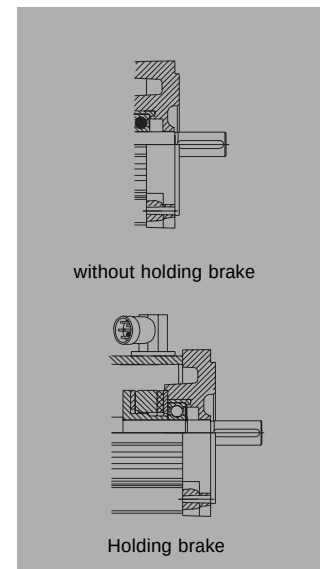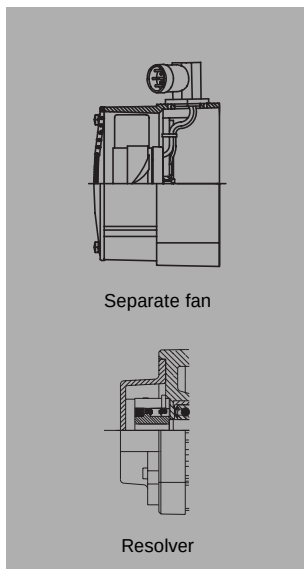

Product code

			M	D															
Product group	_____																		
M	Motor																		
Type of current	_____																		
D	Three-phase AC current																		
Ventilation	_____																		
F	forced ventilated																		
S	self ventilated																		
Version	_____																		
K	Compact motor with square housing and cooling ribs, surface cooled																		
Q	IP23 motor with square housing, enclosed ventilated																		
Type of machine	_____																		
S	Synchronous machine																		
A	Asynchronous machine																		
Modules	_____																		
AG	Sin-Cos absolute value encoder, SSI absolute value encoder																		
BA	Brake and Sin-Cos absolute value encoder, SSI absolute value encoder																		
BG	Brake, resolver and incremental encoder																		
BI	Brake and incremental encoder																		
BR	Brake																		
BS	Brake and resolver																		
BW	Brake, resolver and absolute value encoder																		
BX	Brake, encoder prepared																		
GX	No brake, encoder prepared																		
IG	Incremental encoder																		
NN	No brake, no encoder																		
RA	Resolver and absolute value encoder																		
RI	Resolver and incremental encoder																		
RS	Resolver																		
Frame size	_____																		
Length	_____																		
Number of pole pairs	_____																		

Introduction of Lenze

No matter which drive solution you imagine – we make your dreams come true.


According to our maxim „one stop shopping“ we offer you a complete programme of electronic and mechanical drive systems which are distinguished by reliability and efficiency.



Our supply range includes frequency inverters, speed controllers, variable speed drives, gearboxes and motors as well as clutches and brakes.


Lenze is thus the competent partner for your application – not only as supplier for single components but also for complete drive systems including planning, execution and commissioning. Furthermore, a world-wide service and distribution network allows a qualified customer advisory

service on site and a fast and extensive after sales service. Our quality assurance system for development, production, sales and service is certified to DIN ISO 9001. Our customers set the scale for measuring the quality of our products. Our task is to meet your requirements. Customer orientation as a Lenze principle means the highest quality.

See for yourself.

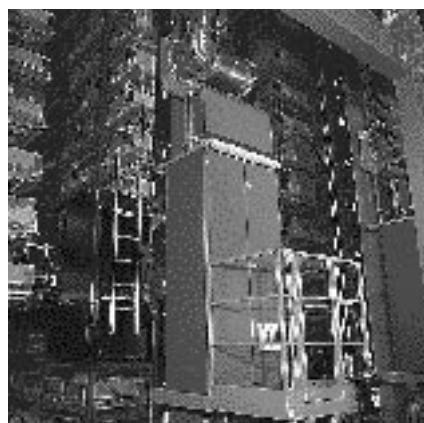

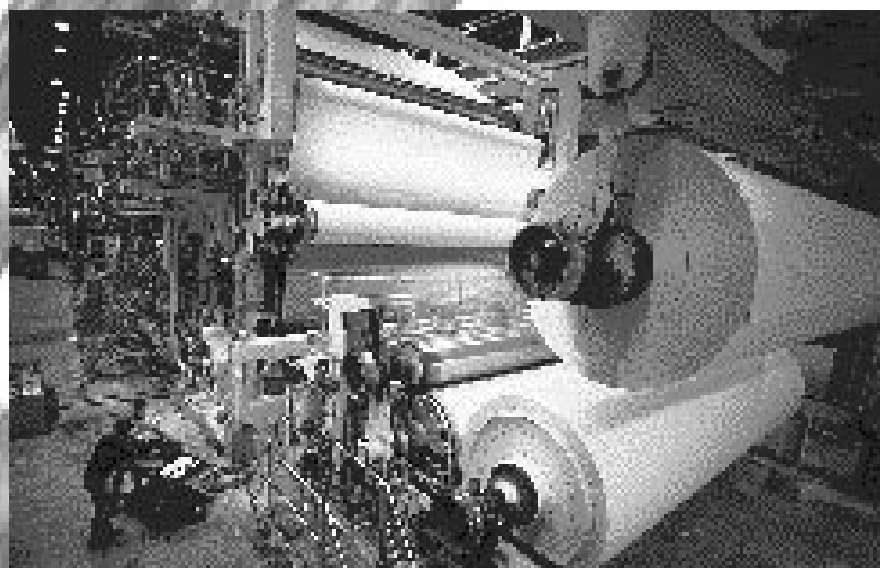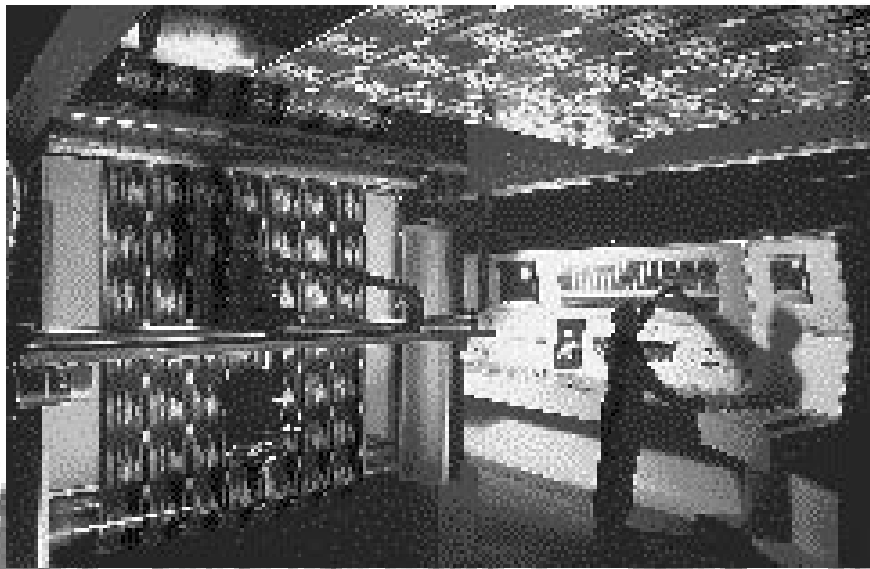



List of abbreviations

Abbreviations used in this catalogue

h	[mm]	Axis height	MDFQA	Enclosed ventilated asynchronous servo motor, forced ventilated (MDFQA)
n_{rated}	[min ⁻¹]	Rated speed	MDXKX	Asynchronous or synchronous servo motor, self or forced ventilated (MDSKA / MDSKS or MDFKA / MDFKS)
M_{rated}	[Nm]	Rated torque	MDSKX	Asynchronous or synchronous servo motor self ventilated (MDSKA / MDFKA)
P_{rated}	[kW]	Rated power	MDFKX	Asynchronous servo motor, self ventilated or forced ventilated (MDSKA / MDFKA)
I_{rated}	[A]	Rated current	MDXKA	Asynchronous servo motor, self ventilated or forced ventilated (MDSKA / MDFKA)
I₀	[A]	Continuous current at standstill	MDXKS	Synchronous servo motor, self ventilated or forced ventilated (MDXKS / MDFKS)
f_{rated}	[Hz]	Rated frequency	AC	AC voltage
M_{max}	[Nm]	Maximum torque	DC	DC voltage
I_{max}	[A]	Maximum current	DIN	Deutsches Institut für Normung
n_{max}	[min ⁻¹]	Maximum speed	EMC	Electromagnetic compatibility
J_{load}	[kgcm ²]	Moment of inertia load machine	EN	European Standard
M_{load}	[Nm]	Torque load machine	IEC	International Electrotechnical Commission
M₀	[Nm]	Continuous torque at standstill	IP	International Protection Code
M_{cont}	[Nm]	Continuous torque	NEMA	National Electrical Manufacturers Association
M_{perm}	[Nm]	Permissible torque	VDE	Verband deutscher Elektrotechniker
η_{gearbox}		Gearbox efficiency	CE	Communauté Européenne
J_{mot}	[kgcm ²]	Moment of inertia motor	IM	International Mounting Code
m	[kg]	Mass		
cos φ_N		Power factor asynchronous motor		
U_{rated}	[V]	Rated voltage		
F_a	[N]	Permissible axial force		
F_{r1}	[N]	Permissible radial force at shaft middle		
F_{r2}	[N]	Permissible radial force at shaft end		
i		Gearbox ratio		
M_B	[Nm]	Holding torque brake		
J_B	[kgcm ²]	Moment of inertia brake		

Global Drive servo motors

Product information

_____	8
-------	---

Selection of servo motors

General data _____	9
Preference types _____	10
Rated data MDXKS _____	11
Rated data MDXKA _____	12
Rated data MDFQA _____	13
Torque-limit characteristics _____	14

Technical data of servo motors

Permissible shaft load _____	38
Fan modules _____	39
Brake modules _____	40
Angle and speed controller modules _____	42
Resolver modules _____	42
SinCos absolute value encoder modules _____	43
Incremental encoder modules _____	43
KTY temperature sensor modules _____	44
Thermostat modules _____	44
Plug-in connectors _____	45
Terminal box _____	48

Dimensions of servo motors

Synchronous servo motor MDSKS 036 _____	51
Synchronous servo motor MDSKS 056 _____	52
Synchronous servo motor MDXKS 071 _____	53
Asynchronous servo motor MDSKA 056 _____	54
Asynchronous servo motor MDXKA 071 _____	55
Asynchronous servo motor MDXKA 080 _____	56
Asynchronous servo motor MDXKA 090 _____	57
Asynchronous servo motor MDXKA 100 _____	58
Asynchronous servo motor MDXKA 112 _____	59
Asynchronous servo motor MDFQA 100...132 _____	60

Application examples


Application of a servo controller _____	62
Possible combinations with controllers _____	64
Connection _____	68
EC Directives _____	69

Order forms

Servo motor MDXK _____	71
Servo motor MDFQA _____	74

Lenze worldwide

_____	76
-------	----



Product information

Servo motors MDXK and MDFQA

Today, servo drive systems must fulfil highest demands. With Global Drive, Lenze succeeded in combining different drive components to form a perfectly matching system. The programme of servo motors for the power range up to 60.1 kW is completed by brushless synchronous servo motors for the lower power range from 0.25 to 4.2 kW. Compared with standard three-phase AC motors, these servo motors provide a very low moment of inertia, low weight, high maximum speed and a wide speed-setting range.

High dynamic response and accuracy

Servo motors provide a low moment of inertia and a high overloadability. Optimum temperature-independent control features are achieved by continuously measuring the temperature with an integrated temperature sensor. Together with servo inverters of series 9300, the motors ensure high speed accuracy, best concentricity and high angle acceleration.

Long service life

The high quality standard, Lenze sets for all components, meets the requirements of modern drive technology for operational safety and service life. A reinforced isolation with thermal reserve (coated wire to thermal class H, class F temperature rise) ensures a long service life of the winding. Prestressed rolling bearings with high temperature resistant lubrication ensure a long service life.

Operational safety

Enclosure IP54 of MDXK motors ensures good protection against dust and water ingress. MDFQA motors up to 60.1 kW are protected by enclosure IP23.

CE conformity

Of course, Lenze servo motors MDXK and MDFQA comply with the EC Directives:

- CE conformity to the Low Voltage Directive
- CE conformity to the Electromagnetic Compatibility of a typical drive configuration with inverter.

The electromagnetic compatibility can be easily guaranteed by using predetermined system cables.

No compromises with the output speed

The wide ratio range of gearboxes combined with the small ratio step of 1.12 enables the exact selection of the output speed range required.

Compact

The high power density of the motors facilitates small drive units.

Especially compact drives are formed by using geared servo motors with directly connected motors.

Adaptability

The modular motor design and the number of planned variants facilitate the selection of the motor for your application.

Thanks to the variety of output designs of motors and geared motors, the drives fulfil many application requirements:

- Servo motors with cylindrical shaft end with or without key
- Servo motors with flanges provided with through hole bores for mounting position B5, with threaded bores for mounting position B14.
- Geared servo motors with solid shaft, hollow shaft or hollow shaft with shrink disc.
- Geared servo motors with or without flange, foot or centring
- Different integrated angle encoders ensure the accuracy required:
 - Resolver as standard solution, optimised characteristic because of internal improvement of the resolver accuracy. SinCos absolute value encoder as industry type for highest accuracy. Incremental encoder with 2048 pulses as preference type for MDFQA and as industry type for MDXK.

Low noise

High chopper frequency of the inverters (up to 16 kHz) result in a low noise generation.

In addition, optimised toothing geometry and internally ribbed cast iron housings of Lenze Gearboxes reduce the noise generated.

Reduced backlash

The application of backlash-free permanent magnet holding brakes enables a defined holding of a position even when no voltage is applied.

Compared with other gearboxes, backlash-free connection elements of Lenze Gearboxes and the high splining quality achieved by precise production ensure a low backlash at the output of geared servo motors.


Special types

Special applications require special motor designs.


Possible options are e.g.:

- incremental encoder as feedback with 4096 pulses
- second feedback.

We are prepared to give more detailed information.



	Synchronous servo motors Series MDSKS, MDFKS	Asynchronous servo motors Series MDSKA, MDFKA	Asynchronous servo motors MDFQA
Enclosure	IP54 / IP65		IP23
Thermal class (VDE 0530)	To thermal class F Insulation (coated wire) To thermal class H		
UL-conformity	UL listed material for coated wire, brush leads, insulation material		
Dielectric strength	Max. voltage amplitude $\hat{V} = 1.5 \text{ kV}$ Max. rate of voltage rise $du/dt = 5 \text{ kV}/\mu\text{s}$		
Vibrational severity	N	N frame sizes 056 and 071, R as of frame size 80	N
Concentricity, eccentricity, coaxiality (DIN 42955)	N	N frame sizes 056 and 071, R as of frame size 80	N
Mechanical tolerance	Diameter shaft end d Ø11 to Ø38: k6, d Ø55: m6 Diameter centring flange b1 : J6		
Temperature monitoring (no complete protection)	Continuous temperature sensor (KTY 83-110)		
Connection	1 plug for each: Motor and brake Resolver and temperature sensor, separate fan (as of frame size 071) or terminal box		Motor connection as terminal box, encoder connection with plug
Temperature range	-20 to + 40 °C without power derating (without brake, non-ventilated) -10 to + 40 °C without power derating (with brake) -15 to +40 °C without power derating (separately ventilated)		
Surface temperature	Self ventilated motors (MDSK) up to 140 °C Forced ventilated motors (MDFK) up to 110 °C		to 110 °C
Installation height	up to 1000 m a. m. s. l. without power derating		
Demagnetising limit	$> 4 \cdot I_{\text{rated}}$ with self ventilation $> 2,9 \cdot I_{\text{rated}}$ with forced ventilation	Demagnetisation not possible	
Maximum torque	$> 4 \cdot M_{\text{rated}}$ with self ventilation $> 2,9 \cdot M_{\text{rated}}$ with forced ventilation	$> 5 \cdot M_{\text{rated}}$	
Rated speed	3000 min ⁻¹	1635-4160 min ⁻¹	550-2935 min ⁻¹
Angle encoder	Resolver / Sin-Cos encoder	Resolver / incremental encoder / Sin-Cos absolute value encoder	
Mounting position	B5 / B14		B5 / B35
Bearing	Deep groove ball bearing with high-temperature resistant grease, 2 seals		
	Locating bearing at A-side		at B-side
Shaft end	with / without key		
Brake	with or without permanent magnet holding brake at A-side		with and without spring- operated brake
Fan	Axial fan as of frame size 071 possible		Radial fan
Colour	Black, RAL 9005		




Selection

Technical data

Preference and industry type of servo motors

Motor type		Motor series MDKXX												MDFQA			
		Synchronous motors						Asynchronous motors						Asynchr.-IP23			
		MDSKXX 036-13	MDSKXX 036-23	MDSKXX 056-23	MDSKXX 056-33	MDXKXX 071-03	MDXKXX 071-13	MDXKXX 071-33	MDXKAXX 056-22	MDXKAXX 071-22	MDXKAXX 080-22	MDXKAXX 090-22	MDXKAXX 100-22	MDXKAXX 112-22	MDFQAXX 100-22	MDFQAXX 112-22	MDFQAXX 132-32
Version																	
Ventilation	Self ventilation	●	●	●	●	●	●	●	●	●	●	○	○	○			
	Forced ventilated					●	●	●		●	●	●	●	●	●	●	●
Enclosure	IP54	●	●	●	●	●	●	●	●	●	●	●	●	●			
	IP65 (only with self ventilation)			○	○	○	○	○	○	○	○	○	○	○			
	IP23s														●	●	●
Frequency / speed	>100 Hz, >2800 min ⁻¹	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	<100 Hz, <2500 min ⁻¹										○	○	○	○	●	●	●
Mounting position	B14C105			●	●				●								
	B14C160					●	●	●		●	●	●	●	●			
	B5 FF75	●	●						●								
	B5A120 FF100			●	●				●								
	B5A160 FF130					●	●	●		●							
	B5A200 FF165										●	●					
	B5A250 FF215												●	●			
	B5A300 FF265													●	●		
	B5A400 FF350																●
	B35A250 FF215														●		
	B35A300 FF265															●	●
directly connected gearbox B9			○	○	○	○	○	○	○	○	○	○	○				
Shaft end	11 x 23 MP with key	●	●														
	14 x 30 MP with key			●	●				●								
	19 x 40 MP with key					●	●	●		●							
	24 x 50 MP with key										●	●					
	28 x 60 MP with key												●				
	38 x 80 MP with key													●	●	●	
	55 x 110 MP with key																●
	11 x 23 OP without key	●	●														
	14 x 30 OP without key			●	●				●								
	19 x 40 OP without key					●	●	●		●							
	24 x 50 OP without key										●	●					
	28 x 60 OP without key												●				
	38 x 80 OP without key													●	●	●	
	55 x 110 OP without key																●
	conical shaft (B9)			○	○	○	○	○	○	○	○	○	○	○			
Brake	without brake	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	24V	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	205V			○	○	○	○	○	○	○	○	○	○	○	●	●	●
Encoder	Resolver	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	SinCos multi turn AM512			○	○	○	○	○	○	○	○	○	○	○	○	○	○
	SinCos single turn AS512			○	○	○	○	○	○	○	○	○	○	○	○	○	○
	ITD21, 2048IMP, TTL								○	○	○	○	○	○	○	○	○
Connection	Plug-in conn. (enc. a. power)	●	●	●	●	●	●	●	●	●	●	●	●	●			
	2 x KK (encoder and power)			○	○	○	○	○	○	○	○	○	○	○			
	1 x KK1 (power)			○	○	○	○	○	○	○	○	○	○	○	●	●	●
Temperature monitoring	Thermostat KTY	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Thermal encoder TKO														●	●	●

● = preference type
○ = industrial type




Synchronous servo motors series MDSKS / MDFKS (surface cooled)

Motor type	Axial height h [mm]	Torque with 3000/min M _{rated 3000} [Nm]	Speed n _{rated} [min ⁻¹] ¹⁾	Torque M _{rated} [Nm]	Power P _{rated} [kW]	Voltage V _{rat. 3~} [V]	Current I _{rated} [A]	M ₀ [Nm]	I ₀ [A]	Maximum torque ⁶⁾ M _{max} [Nm]	Maximum power I _{max} [A]	Frequency f _{rated} [Hz]	Inertia J [kgcm ²]	Weight m ¹⁾ [kg]	Gearbox connection corresp. to stand. motor d x l ³⁾
without fan															
MDSKS 036-13, 200	35		4000	0.6	0.25	245	0.9	0.65	0.9	3.1	5.4	200	0.22	1.5	
MDSKS 036-23, 200	35		4000	1.3	0.54	345	1.1	1.5	1.25	7.2	7.5	200	0.36	2.1	
MDSKS 056-23, 190	51	2.9	3800	2.8	1.1	330	2.3	3.2	2.6	11.6	10	190	1.2	5.3	071, C105
MDSKS 056-33, 200	51	4.3	4000	4.2	1.8	325	3.6	4.7	4.0	17.2	16	200	1.8	6.3	071, C105
MDSKS 071-03, 170	65	5.9	3400	5.7	2.0	330	4.2	6.7	4.9	23.6	19	170	6.0	8.9	080, C160
MDSKS 071-13, 185	65	8.8	3700	8.3	3.2	325	7.0	10.0	8.4	35.2	32	185	8.0	10.9	080, C160
MDSKS 071-33, 180	65	12.7	3600	12.3	4.6	325	10.0	14.7	11.9	52.0	45	180	10.0	13.0	080, C160
with separate fan															
MDFKS 071-03, 165	65	7.7	3300	7.5	2.6	330	5.6	8.8	6.6	23.6	19	165	6.0	10.2	080, C160
MDFKS 071-13, 180	65	11.7	3600	11.0	4.1	325	9.2	13.3	11.1	35.2	32	180	8.0	12.2	080, C160
MDFKS 071-33, 175	65	17.0	3500	16.2	5.9	325	13.1	19.3	15.6	52.0	45	175	10.0	14.3	080, C160

1) without fan, with resolver

3) frame size and flange of a standard motor with similar flange and shaft dimensions

6) magnetic / mechanical permissible torque



Selection

Rated data

Asynchronous servo motors series MDSKA / MDFKA (surface ventilated)

Motor type	h [mm]	n_{rated} [min ⁻¹]	M_{rated} [Nm]	P_{rated5} [kW]	V_{rated3} ~ [V]	I_{rated} [A]	M_0 [Nm]	I_0 [A]	M_{max6} [Nm]	$n_{rated,max}$ [min ⁻¹]	f_{rated} [Hz]	$\cos\varphi_N$	$J^1)$ [kgcm ²]	$m^1)$ [kg]	Gearbox connection corresponds to standard motor ³⁾
self cooled															
MDSKA 056-22, 140	51	3950	2.0	0.8	390	2.4	2.3	2.55	10	8000	140	0.70	2.4	6.4	071, C105
MDSKA 071-22, 140	65	4050	4.0	1.7	390	4.4	4.6	4.6	32	8000	140	0.76	8.3	10.4	080, C160
MDSKA 080-22, 70	71	2000	6.7	1.4	390	3.3	8.0	3.85	60	8000	70	0.75	19.2	15.1	090, C160
MDSKA 080-22, 140		4100	5.4	2.3	390	5.8	8.0	7.7	60	8000	140	0.75			
MDSKA 090-22, 80	83	2300	10.8	2.6	390	5.5	12.8	6.0	100	8000	80	0.81	36	22.9	090,C160
MDSKA 090-22, 140		4110	9.5	4.1	350	10.2	12.8	12.0	100	8000	140	0.80			
MDSKA 100-22, 80	96	2340	16.3	4.0	390	8.2	22.5	9.85	180	8000	80	0.80	72	44.7	112, C160
MDSKA 100-22, 140		4150	12.0	5.2	330	14.0	22.5	19.7	180	8000	140	0.78			
MDSKA 112-22, 85	107	2490	24.6	6.4	390	13.5	39	15.9	300	8000	85	0.83	180	60	132, A300
MDSKA 112-22, 140		4160	17.0	7.4	320	19.8	39	31.8	300	8000	140	0.80			
with separate fan															
MDFKA 071-22, 120	65	3410	6.3	2.2	390	6.0	7.0	6.3	32	8000	120	0.75	8.3	12.0	080, C160
MDFKA 080-22, 60	71	1635	12.0	2.1	390	4.8	13.5	5.25	60	8000	60	0.81	19.2	16.9	090, C160
MDFKA 080-22, 120		3455	10.8	3.9	390	9.1	13.5	10.5	60	8000	120	0.80			
MDFKA 090-22, 60	83	1680	21.5	3.8	390	8.5	23.9	9.05	100	8000	60	0.80	36	25.5	090, C160
MDFKA 090-22, 120		3480	19.0	6.9	390	15.8	23.9	18.1	100	8000	120	0.80			
MDFKA 100-22, 60	96	1700	36.3	6.4	390	13.9	40.0	15.4	180	8000	60	0.83	72	48.2	112, C160
MDFKA 100-22, 120		3510	36.0	13.2	390	28.7	40.0	30.8	180	8000	120	0.80			
MDFKA 112-22, 60	107	1710	61.4	11.0	390	22.5	75	25.8	300	8000	60	0.85	180	63.5	132, A300
MDFKA 112-22, 120		3520	55.0	20.3	390	42.5	75	49.5	300	8000	120	0.80			


1) without brake, with resolver

2) with 390 V, idle running $M = 0$

3) frame size and flange of a standard motor with similar flange and shaft dimensions

5) when V_{rated} , $P = P_{rated}$ up to $2.3 \cdot n_{rated}$

6) magnetic / mechanical permissible torque



Asynchronous servo motors series MDFQA (enclosed ventilated)

Motor type	Connec- tion	h [mm]	n_{rated} [min ⁻¹]	M_{rated} [Nm]	P_{rated} ⁵⁾ [kW]	V_{rated} ³⁾ [V]	I_{rated} [A]	M_0 [Nm]	I_0 [A]	M_{max} ⁶⁾ [Nm]	f [Hz]	η	$\cos\varphi$	n_{max} [min ⁻¹]	$J^1)$ [kgcm ²]	$m^1)$ [kg]	Gearbox connection corresponds to standard motor 3)
MDFQA 100-22, 50	Y	100	1420	71.3	10.6	360	26.5	76	27.0	250	50	0.76	0.84	5000	180	65	132, A300
MDFQA 100-22, 100	Y	100	2930	66.2	20.3	360	46.9	76	54.0	250	100	0.87	0.80				
MDFQA 112-22, 50	Y	112	760	145	11.5	360	27.2	156	29.5	500	28	0.78	0.87	4500	470	115	132, A300
	Δ		1425	135	20.1	360	43.7	156	51.0	500	50	0.86	0.86				
MDFQA 112-22, 100	Y	112	1670	130	22.7	360	49.1	156	59.0	500	58	0.87	0.85				
	Δ		2935	125	38.4	360	81.9	156	102.0	500	100	0.90	0.83				
MDFQA 132-32, 36	Y	132	550	296	17.0	360	45.2	325	52.6	1100	20	0.74	0.81	4500	1310	170	200, A400
	Δ		1030	288	31.1	360	77.4	325	90.2	1100	36	0.84	0.77				
MDFQA 132-32, 76	Y	132	1200	282	35.4	360	88.8	325	109.0	1100	42	0.82	0.78				
	Δ		2235	257	60.1	340	144.8	325	196.5	1100	76	0.88	0.80				

1) without brake, with resolver


2) with 390 V, idle running $M = 0$

3) frame size and flange of a standard motor with similar flange and shaft dimensions

5) when V_{rated} , $P = P_{rated}$ up to $2.3 \cdot n_{rated}$

6) magnetic / mechanical permissible torque







Selection


Torque-limit characteristics

Duty type: Continuous operation S6, 10 min load cycle with terminal box connection

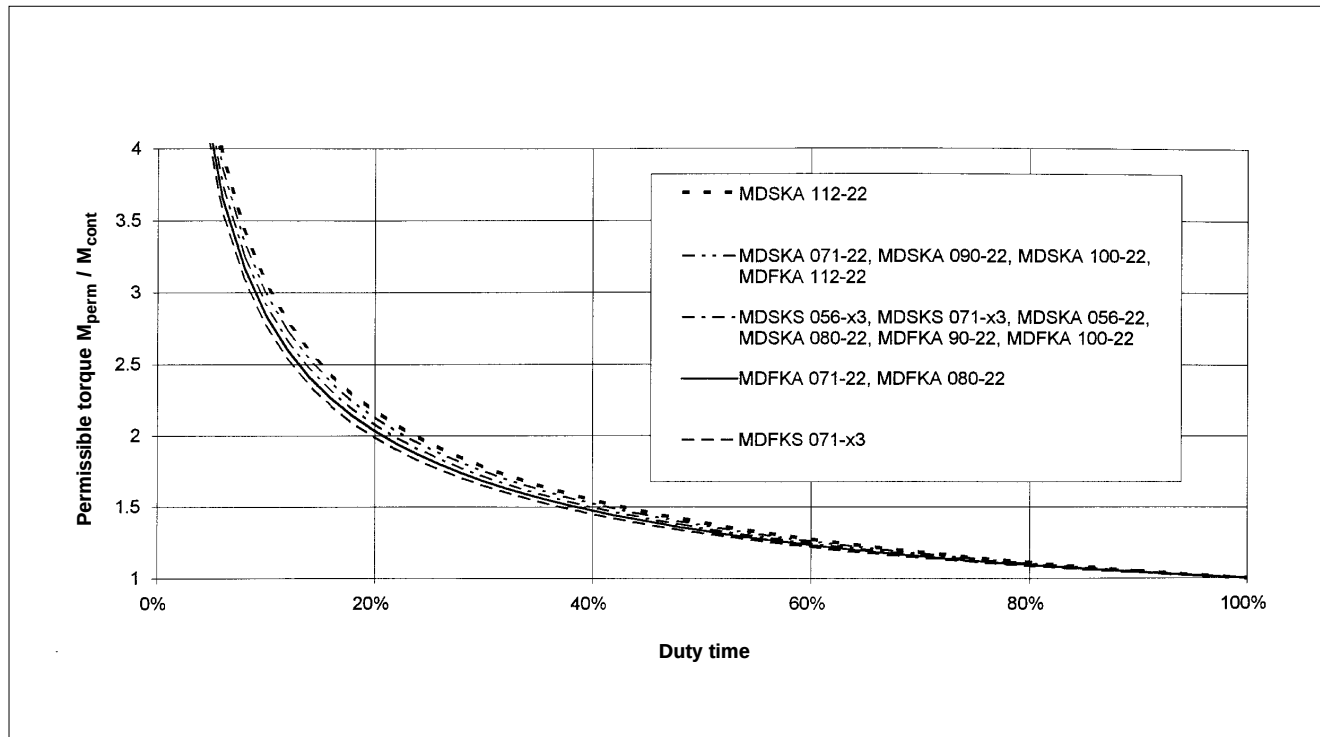



Duty type: Continuous operation S6, 1 min load cycle with terminal box connection

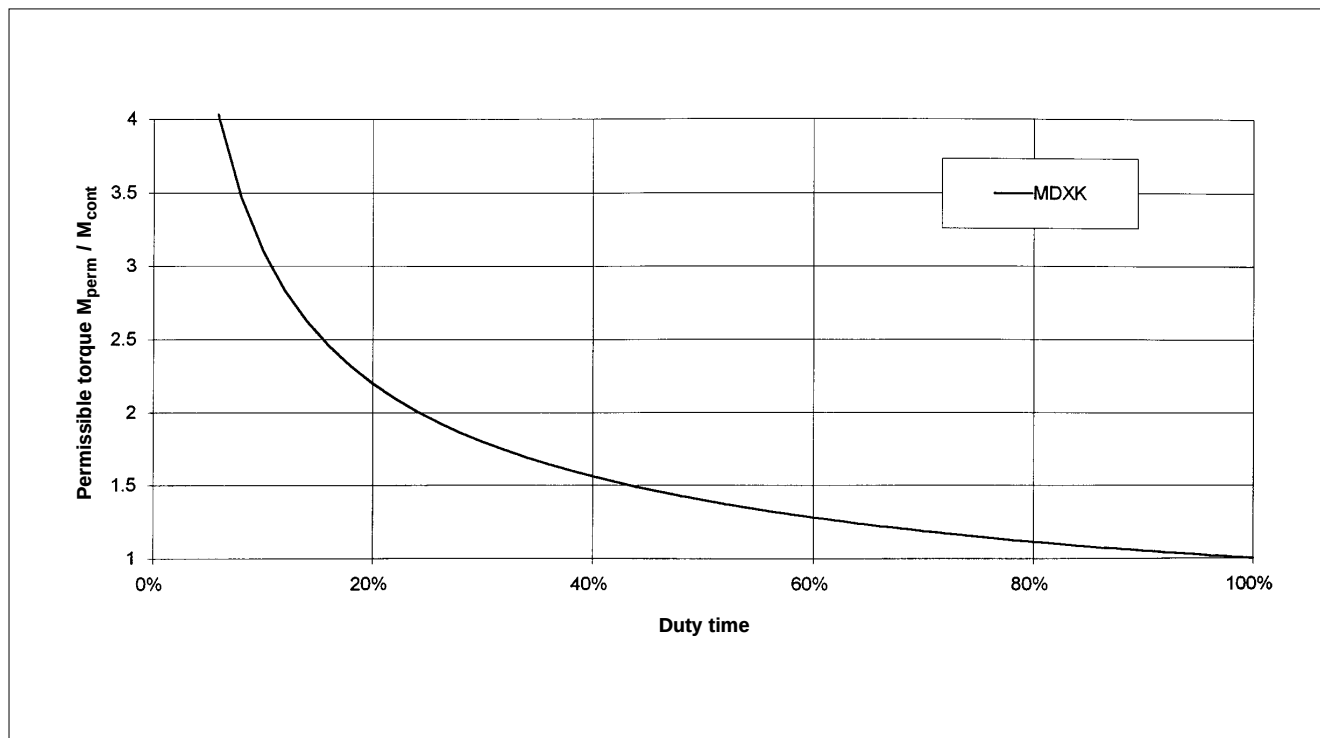



Duty type: Short time operation S2 with terminal box connection

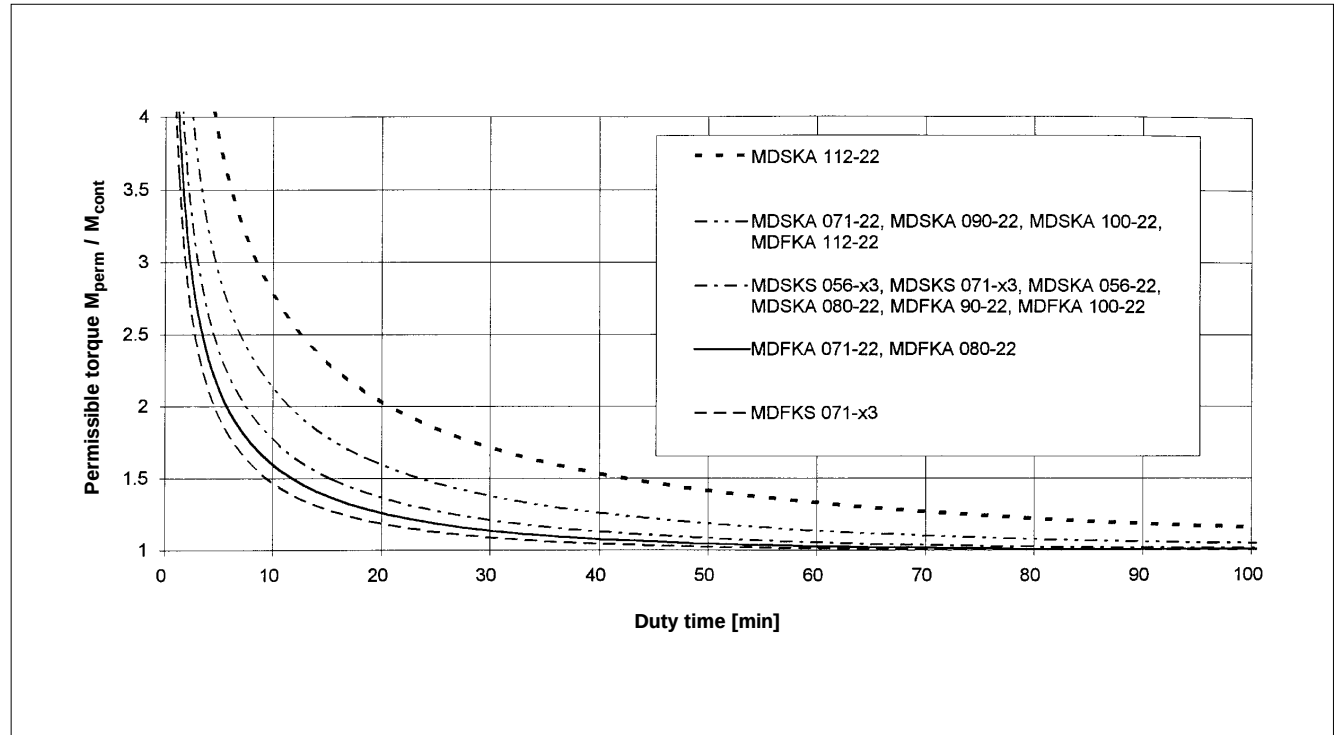




Selection

Torque-limit characteristics

Motor-inverter combination:

Maximum and permanent torque synchronous servo motor MDSKS 036-13, 200 Hz without fan


Inverters 9321-9323

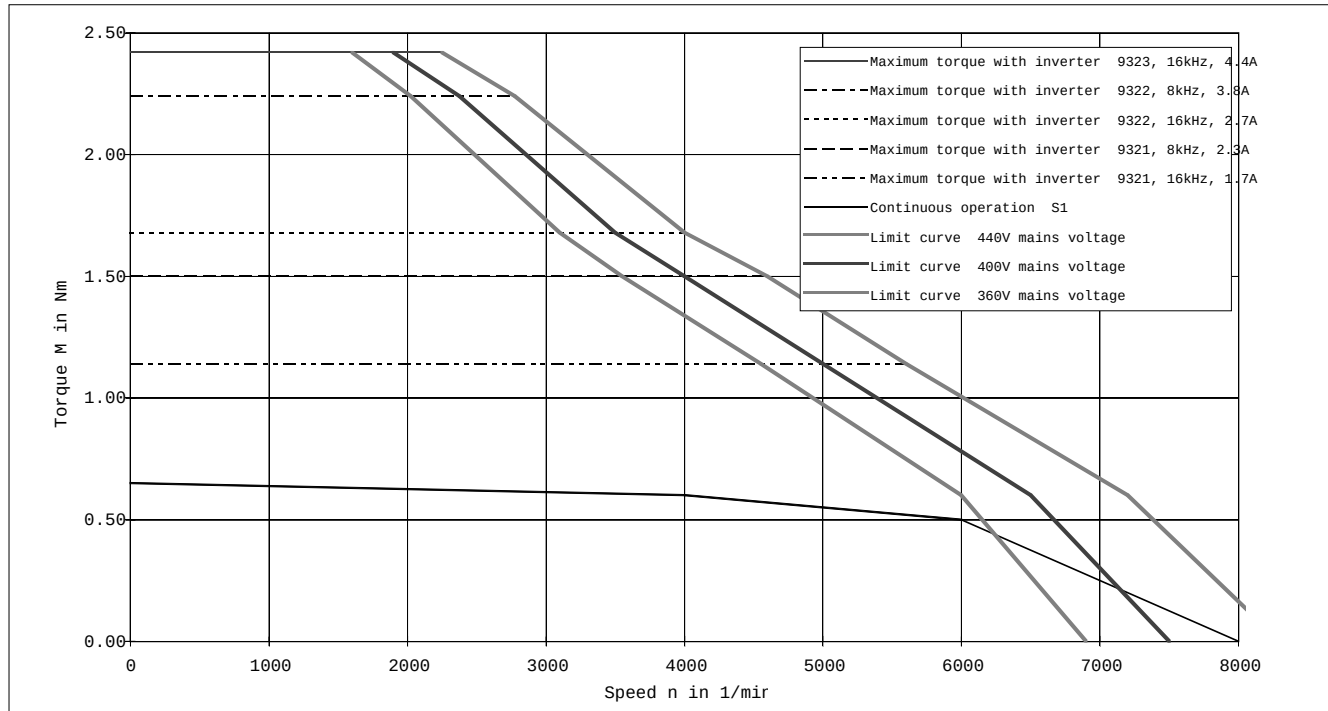


Motor-inverter combination:

Maximum and permanent torque synchronous servo motor MDSKS 036-23, 200 Hz without fan


Inverters 9321-9323

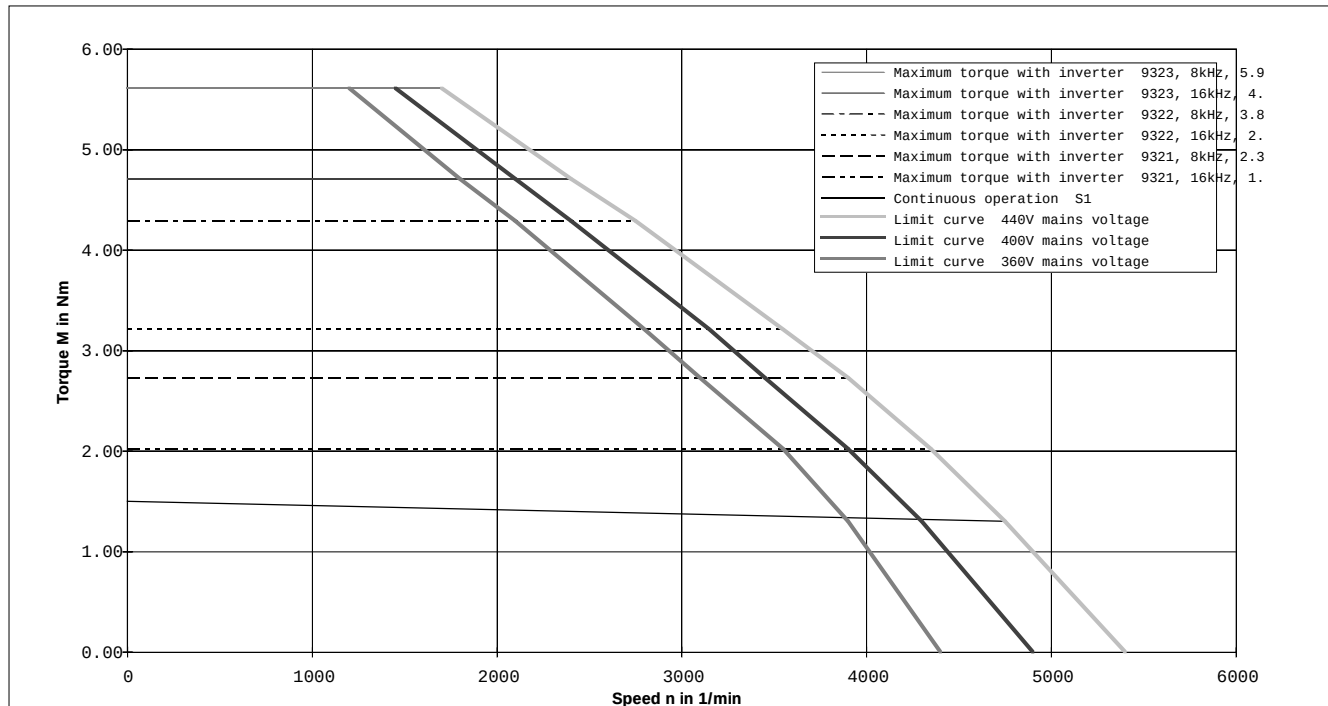




Motor-inverter combination:


**Maximum and permanent torque synchronous servo motor MDSKS 056-23, 190 Hz without fan
Inverters 9321-9323**

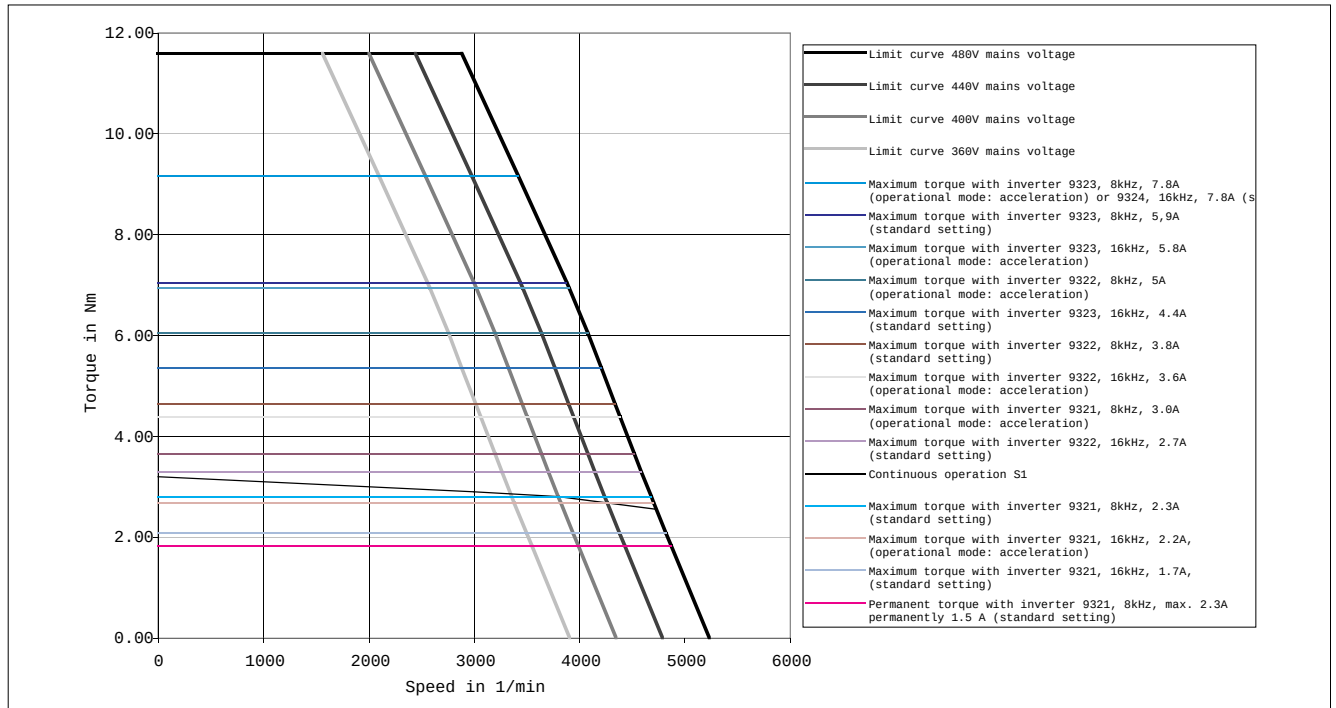

Motor-inverter combination:

**Maximum and permanent torque synchronous servo motor MDSKS 056-33, 200 Hz without fan
Inverters 9322-9325**

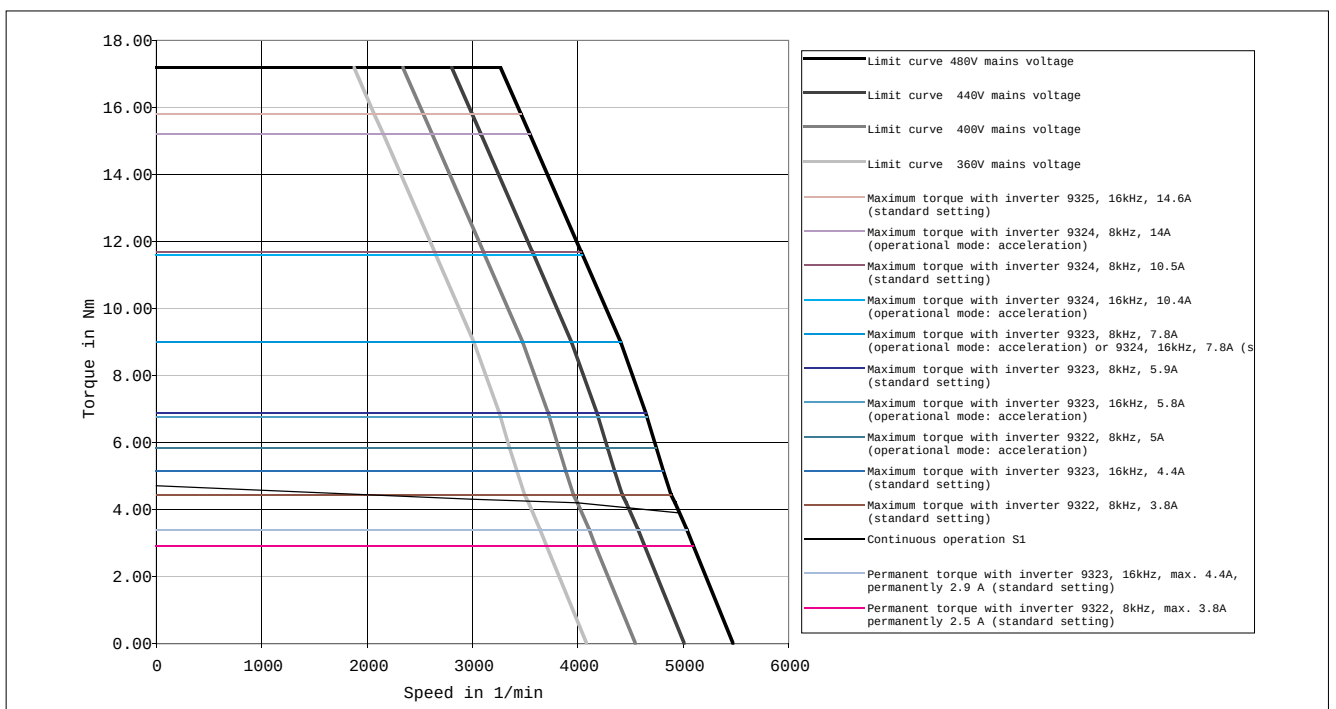




Selection

Torque-limit characteristics

Motor-inverter combination:

Maximum and permanent torque synchronous servo motor MDSKS 071-03, 170 Hz without fan


Inverters 9323-9325

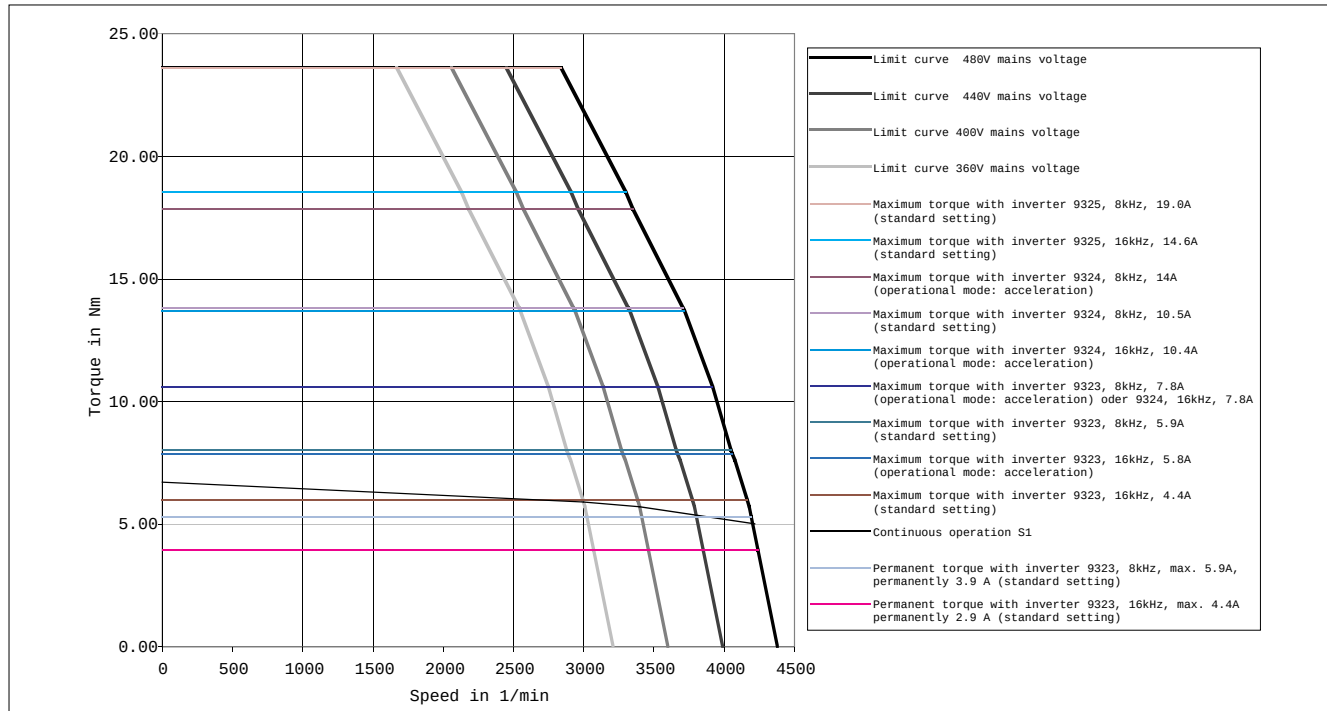


Motor-inverter combination:

Maximum and permanent torque synchronous servo motor MDFKS 071-03, 165 Hz with fan


Inverters 9323-9325

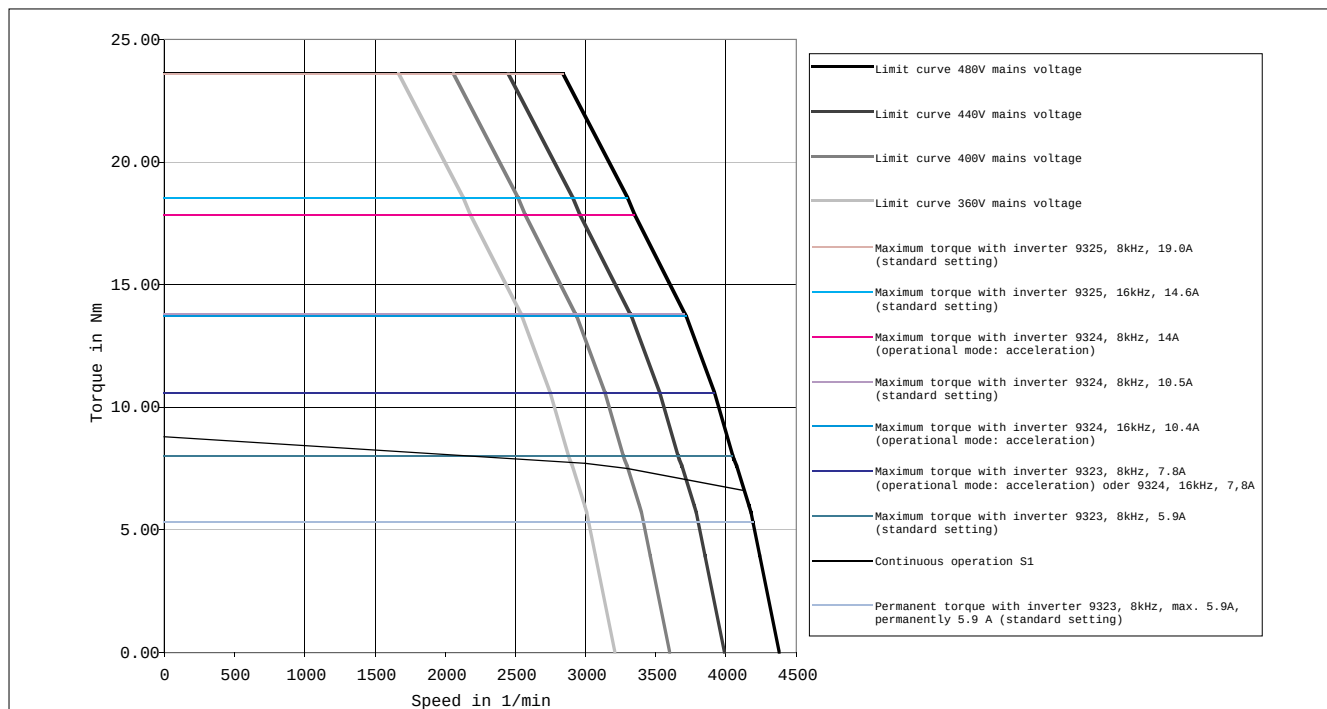




Motor-inverter combination:


Maximum and permanent torque synchronous servo motor MDSKS 071-13, 185 Hz without fan
Inverters 9323-9327

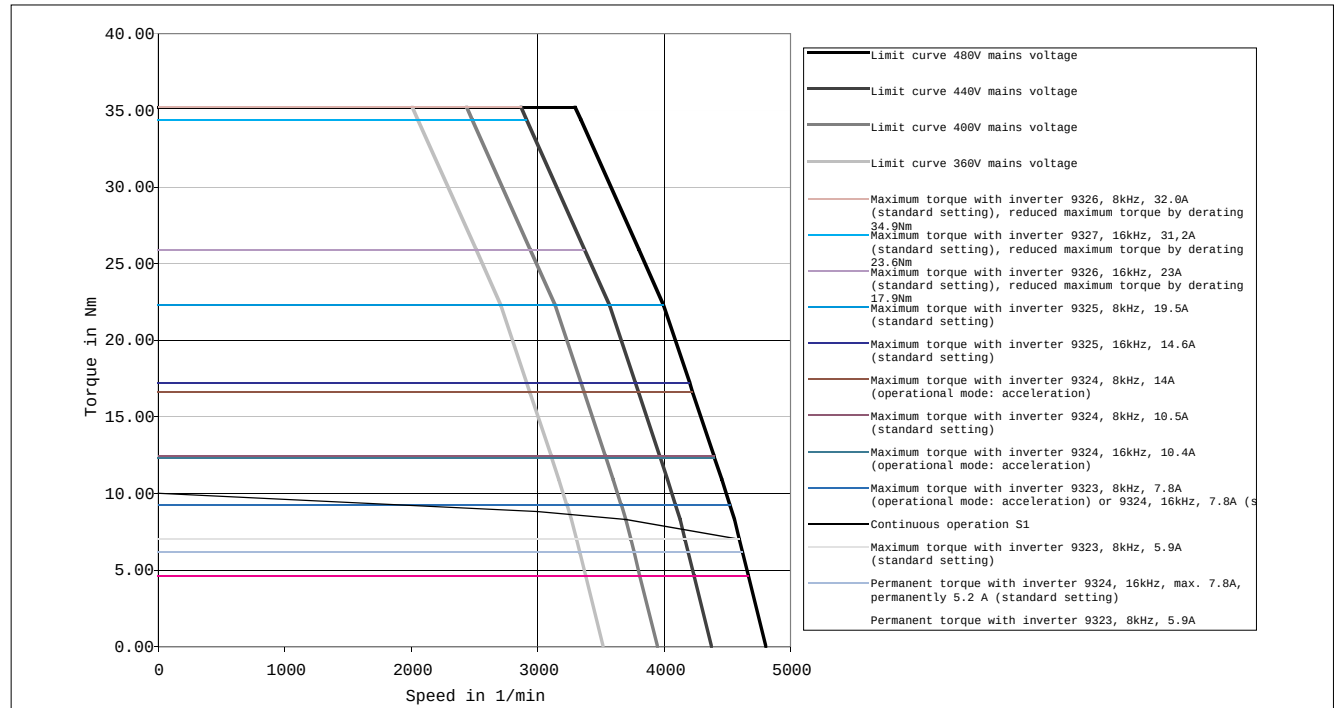

Motor-inverter combination:

Maximum and permanent torque synchronous servo motor MDFKS 071-13, 180 Hz with fan
Inverters 9323-9327

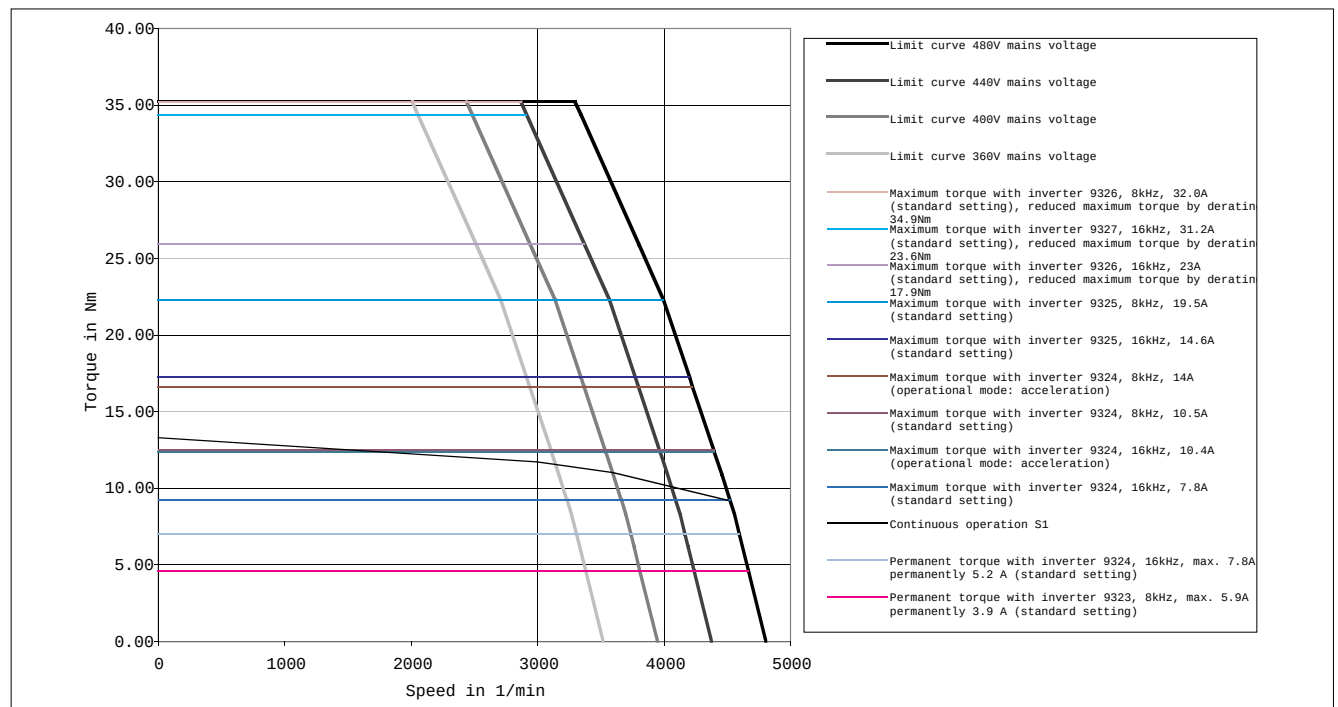




Selection

Torque-limit characteristics

Motor-inverter combination:

Maximum and permanent torque synchronous servo motor MDSKS 071-33, 180 Hz without fan


Inverters 9324-9327

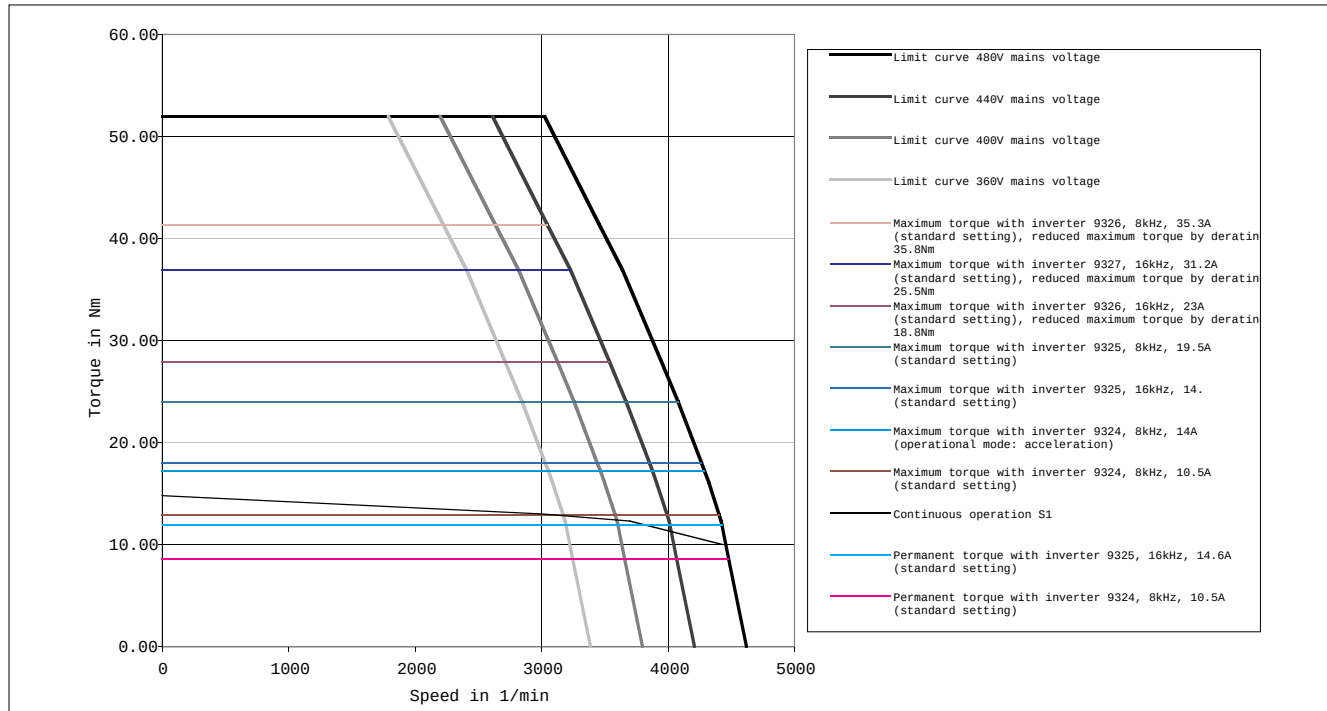


Motor-inverter combination:


Maximum and permanent torque synchronous servo motor MDFKS 071-33, 175 Hz with fan


Inverters 9324-9327

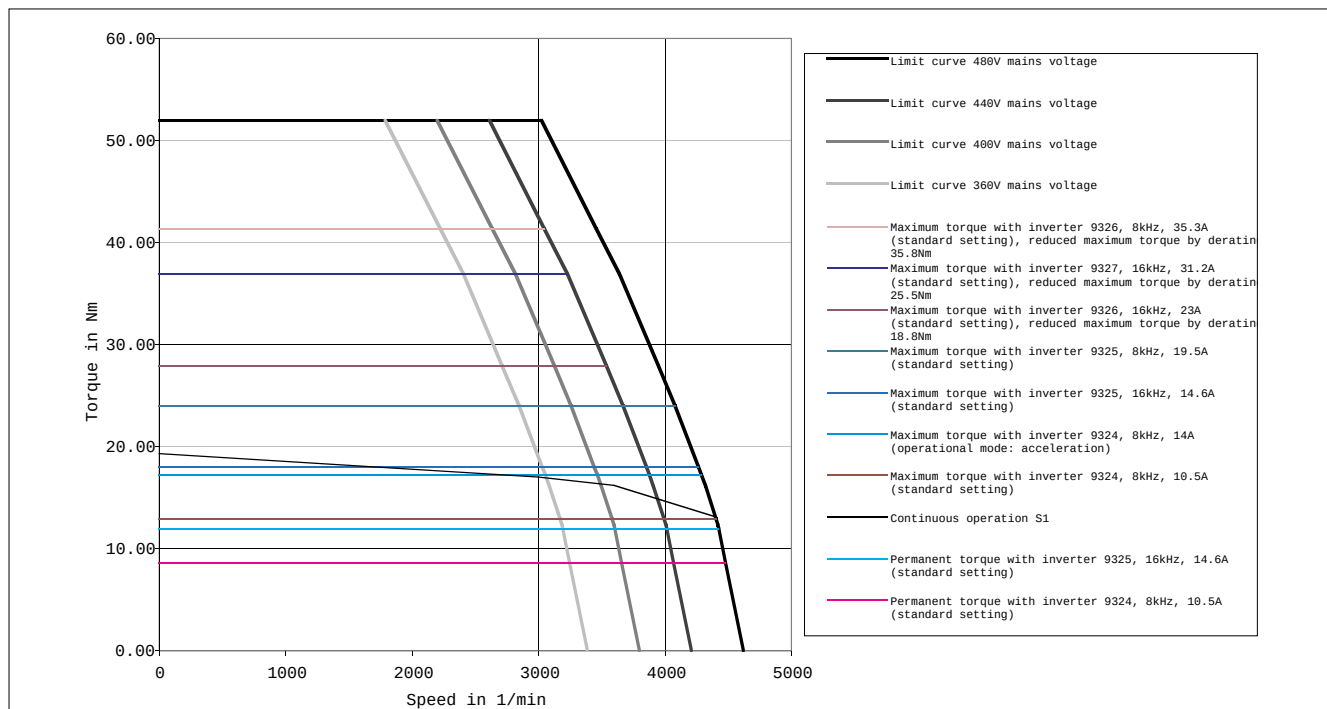



Motor-inverter combination:
Maximum and permanent torque asynchronous servo motor MDSKA 056, 140 Hz without fan
Inverters 9322-9324

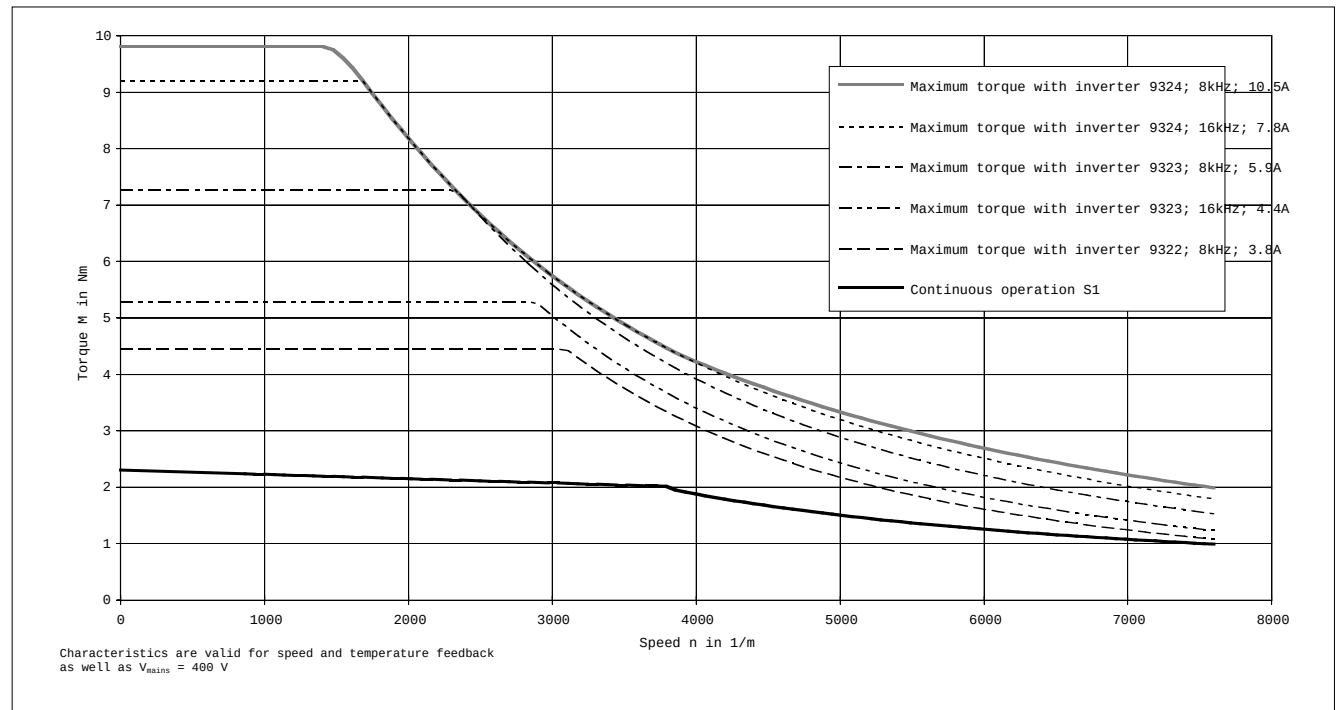




Selection

Torque-limit characteristics


Motor-inverter combination:


Maximum and permanent torque asynchronous servo motor MDSKA 071, 140 Hz without separate fan
Inverters 9324-9325

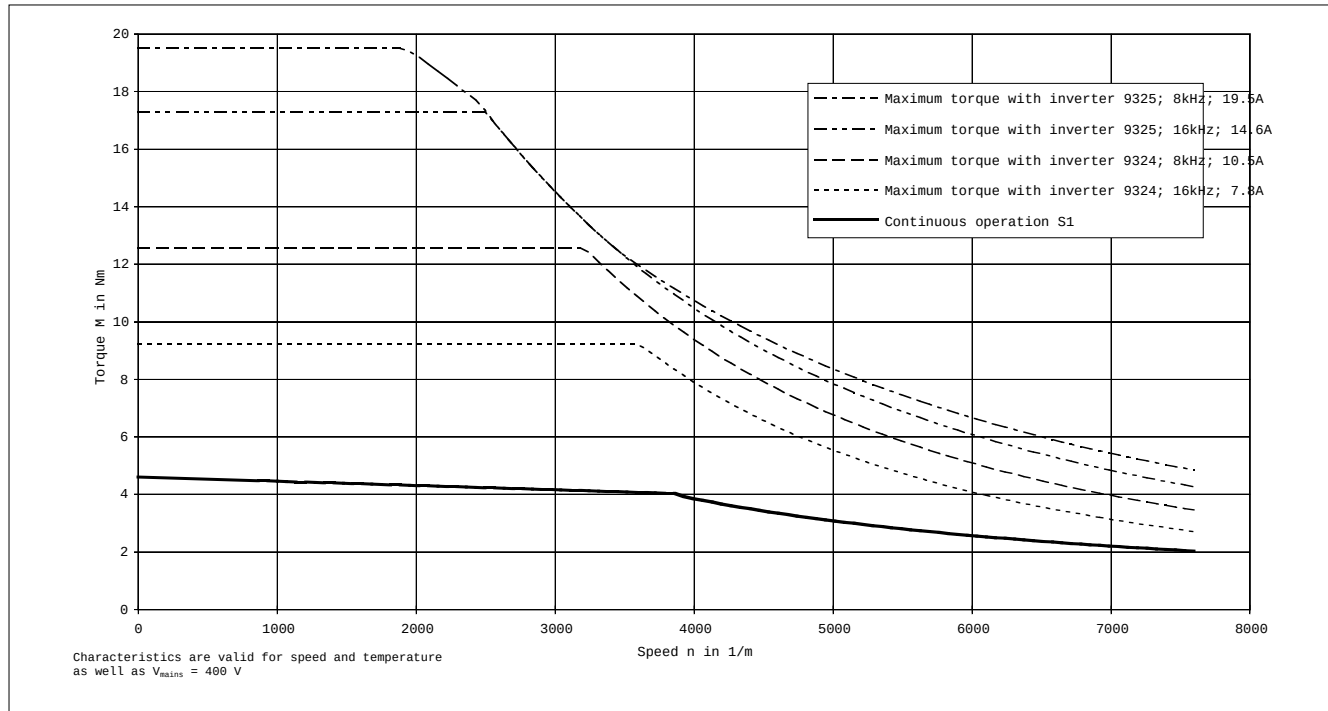


Motor-inverter combination:

Maximum and permanent torque asynchronous servo motor MDFKA 071, 120 Hz with fan
Inverters 9324-9326

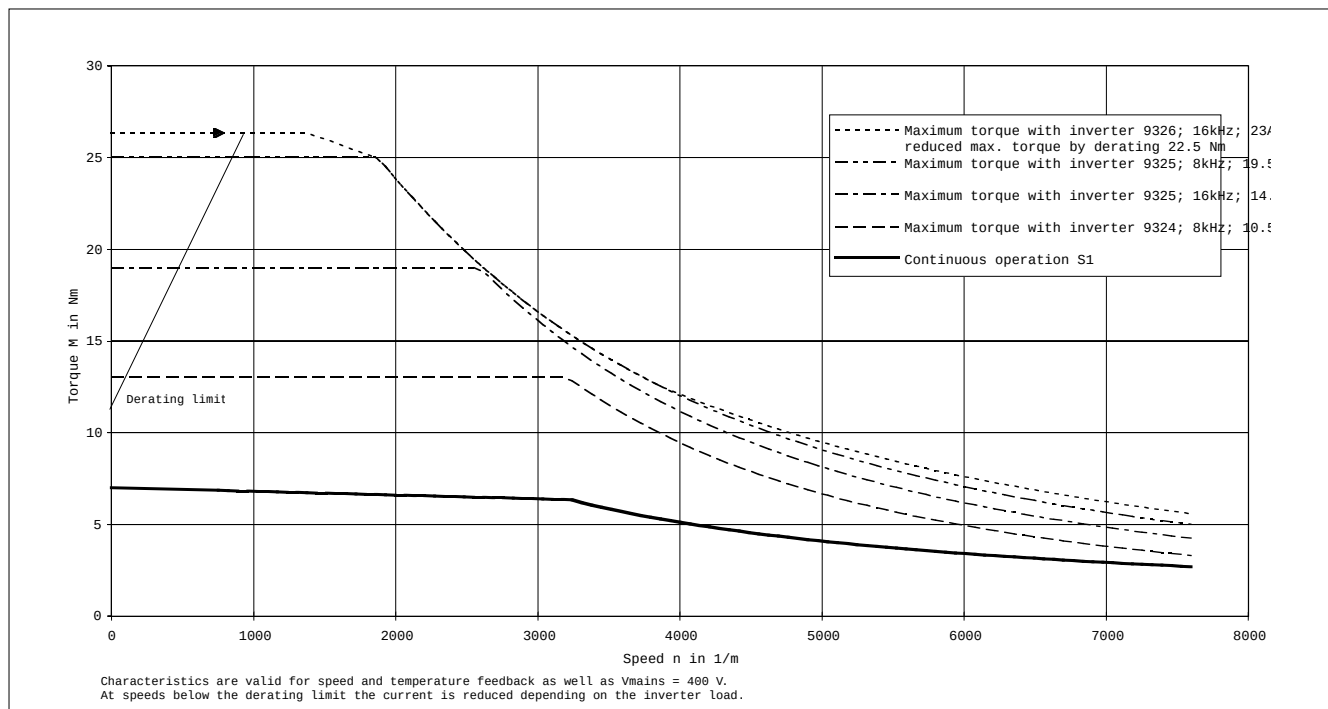





Motor-inverter combination:
Maximum and permanent torque asynchronous servo motor MDSKA 080, 70 Hz without fan
Inverters 9323-9325

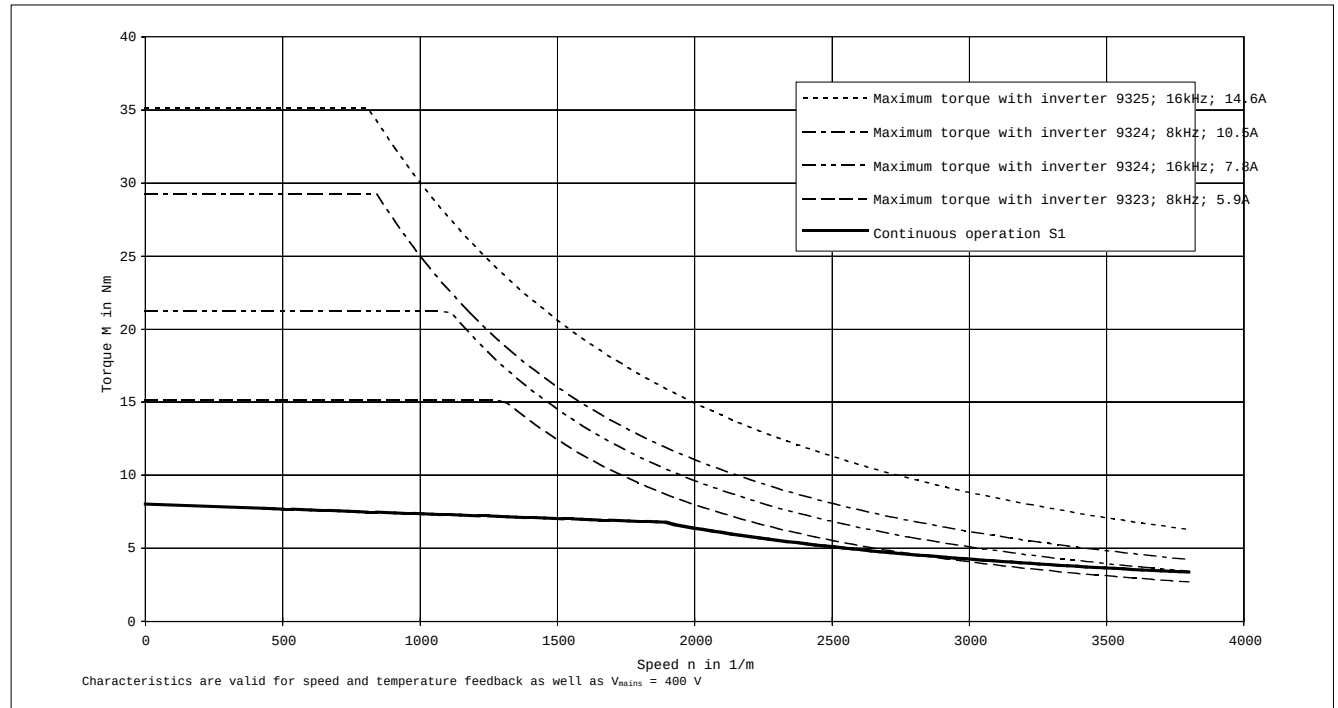

Motor-inverter combination:
Maximum and permanent torque asynchronous servo motor MDFKA 080, 60 Hz with separate fan
Inverters 9324-9325

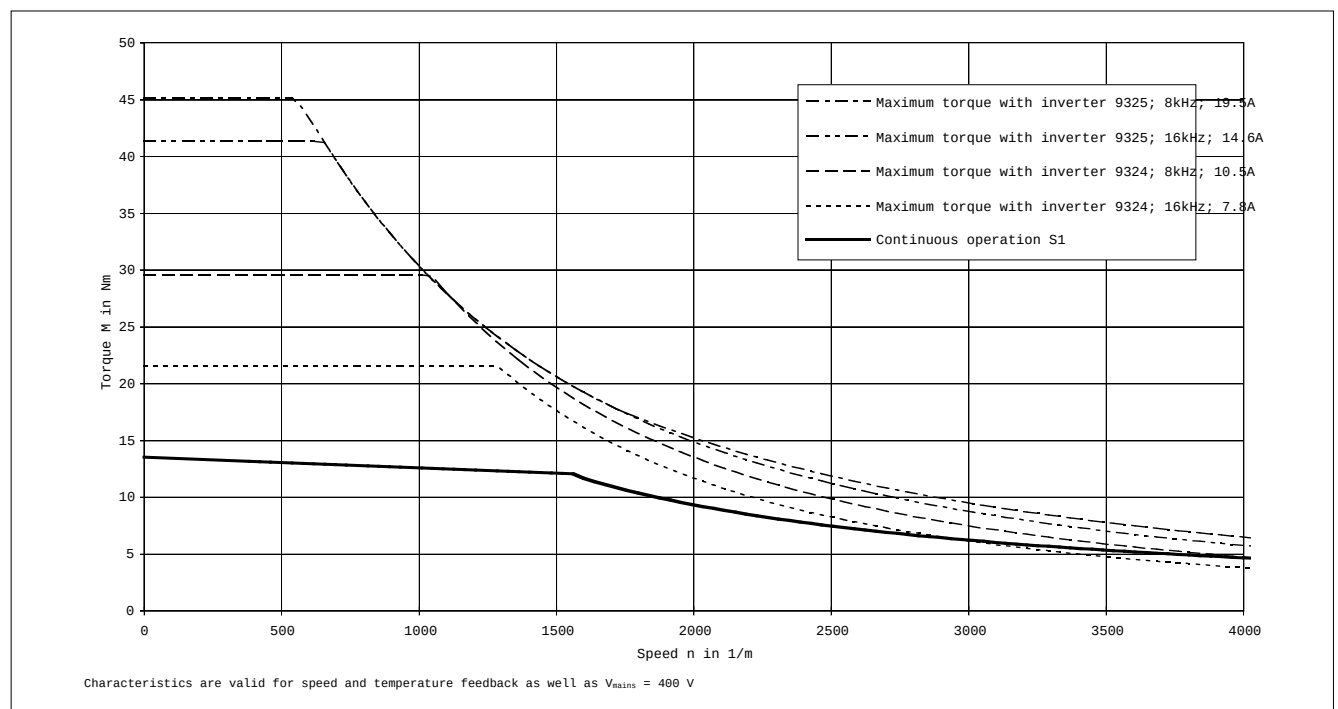




Selection

Torque-limit characteristics

Motor-inverter combination:

Maximum and permanent torque asynchronous servo motor MDSKA 080, 140 Hz without fan


Inverters 9324-9326

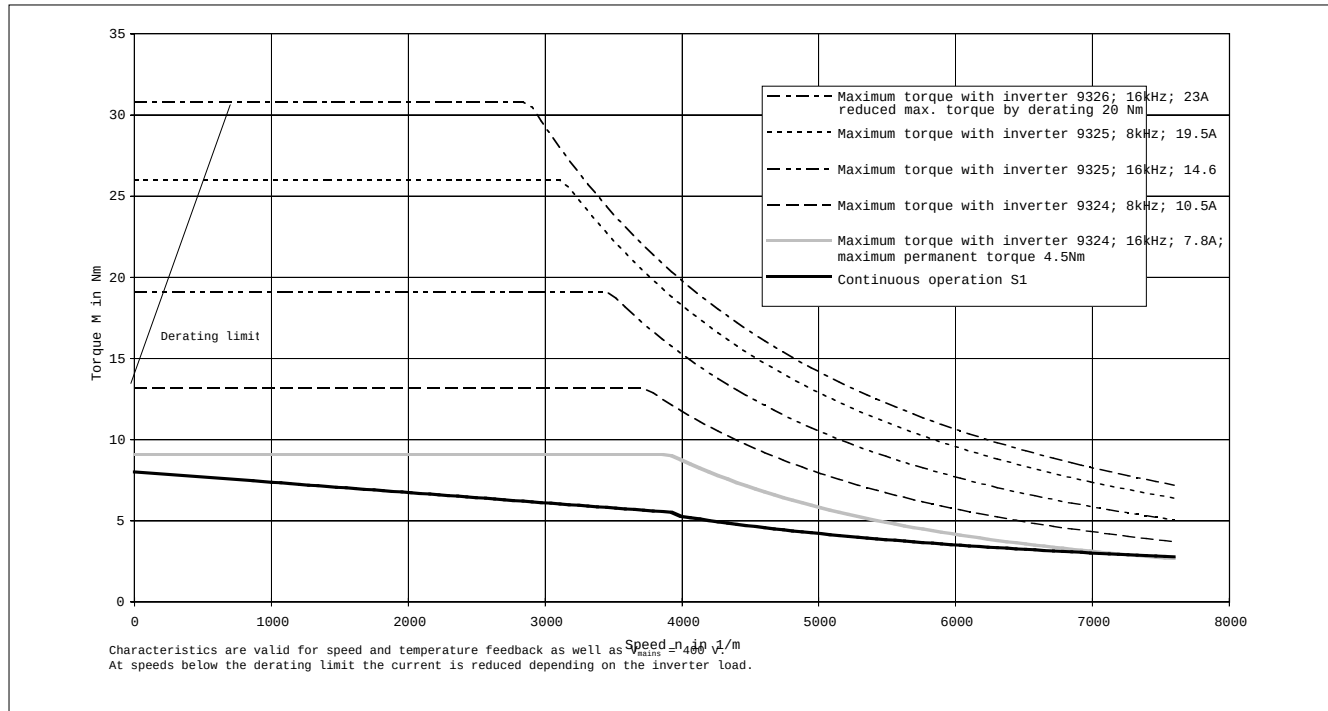


Motor-inverter combination:

Maximum and permanent torque asynchronous servo motor MDFKA 080, 120 Hz with separate fan

Inverters 9325-9327

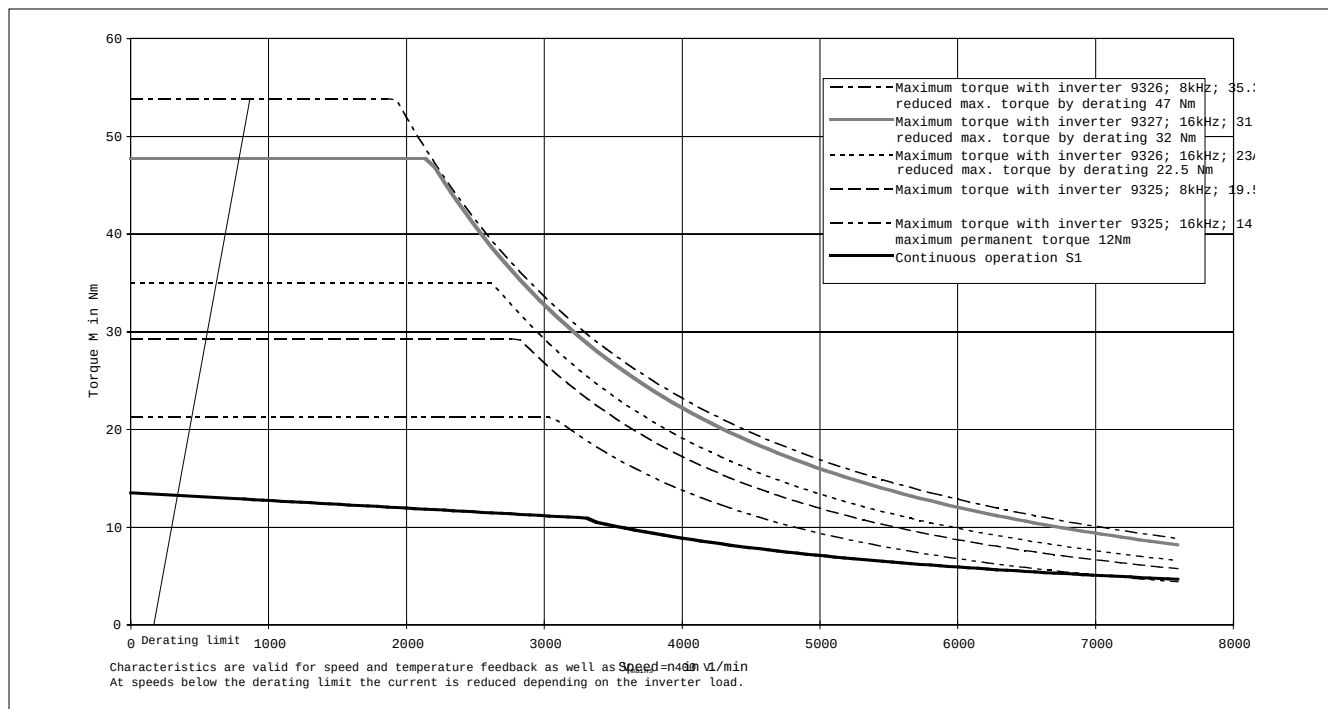




Motor-inverter combination:

Maximum and permanent torque asynchronous servo motor MDSKA 090, 80 Hz without fan


Inverters 9324-9326

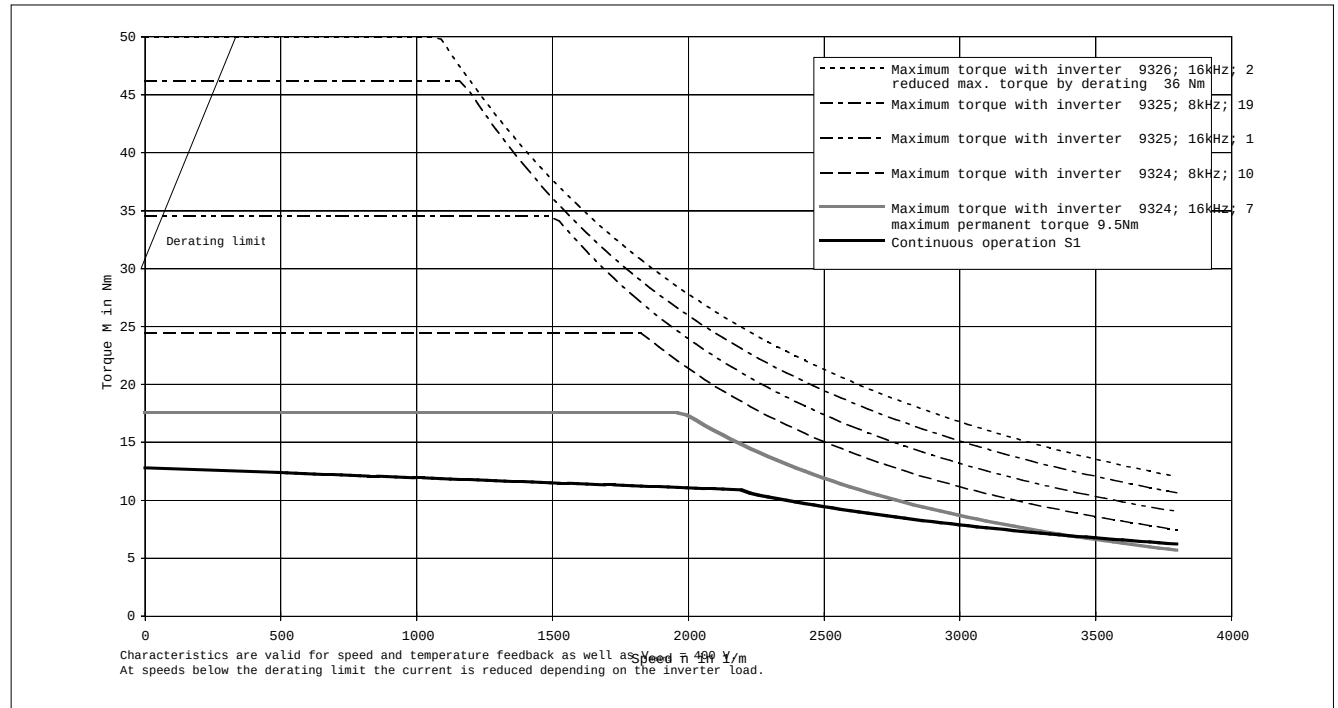


Motor-inverter combination:

Maximum and permanent torque asynchronous servo motor MDFKA 090, 60 Hz with separate fan

Inverters 9325-9327

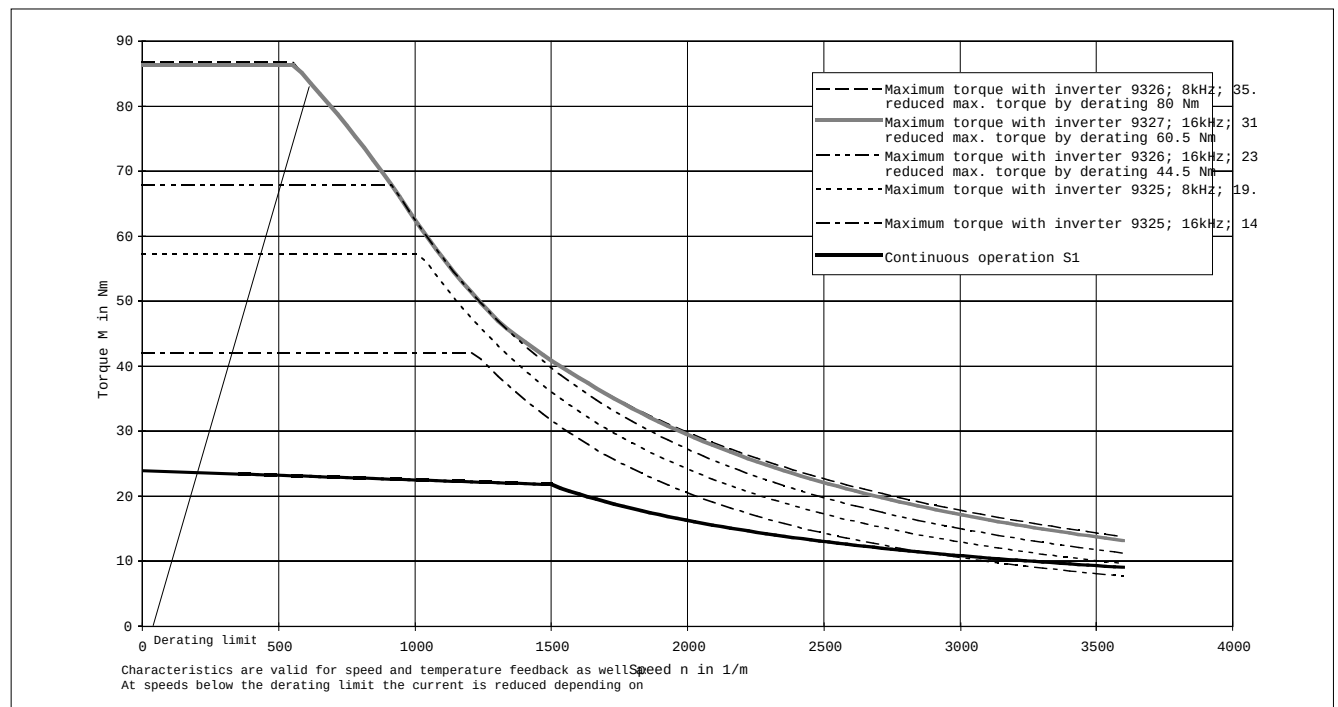




Selection

Torque-limit characteristics

Motor-inverter combination:

Maximum and permanent torque asynchronous servo motor MDSKA 090, 140 Hz without fan


Inverters 9325-9328

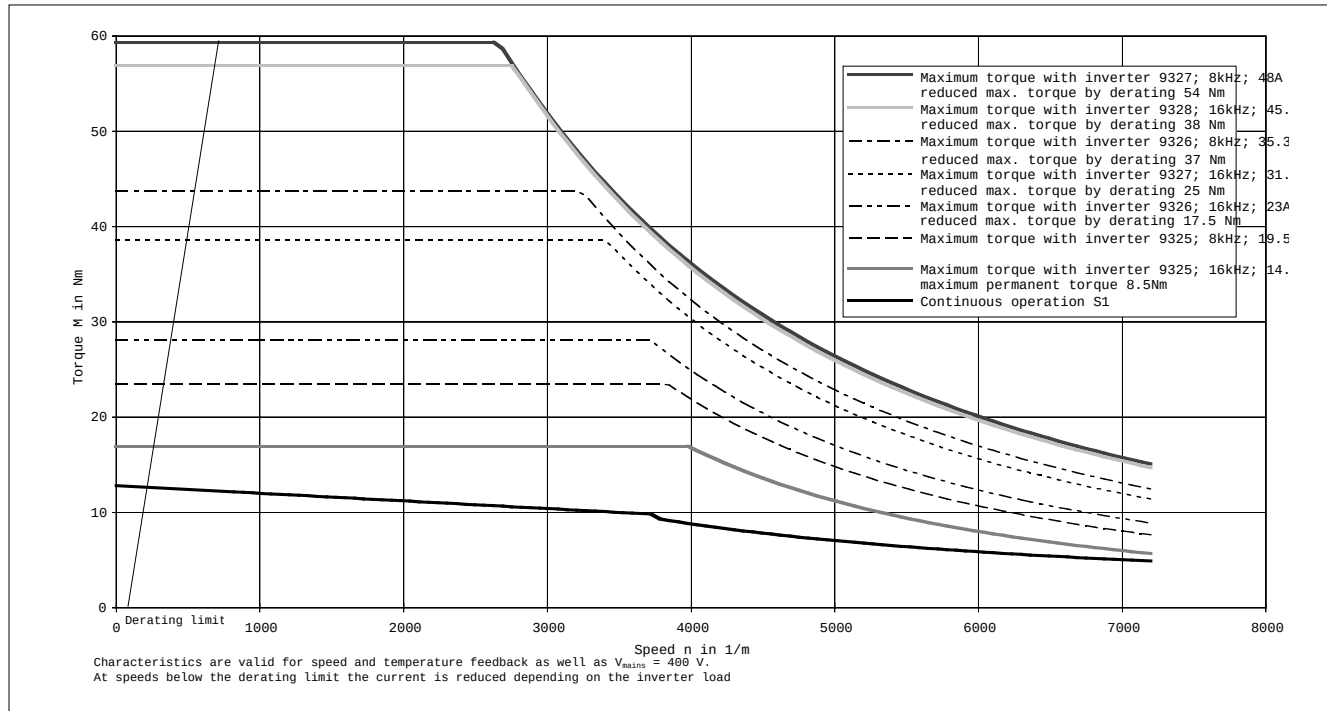


Motor-inverter combination:

Maximum and permanent torque asynchronous servo motor MDFKA 090, 120 Hz with separate fan


Inverters 9326-9329

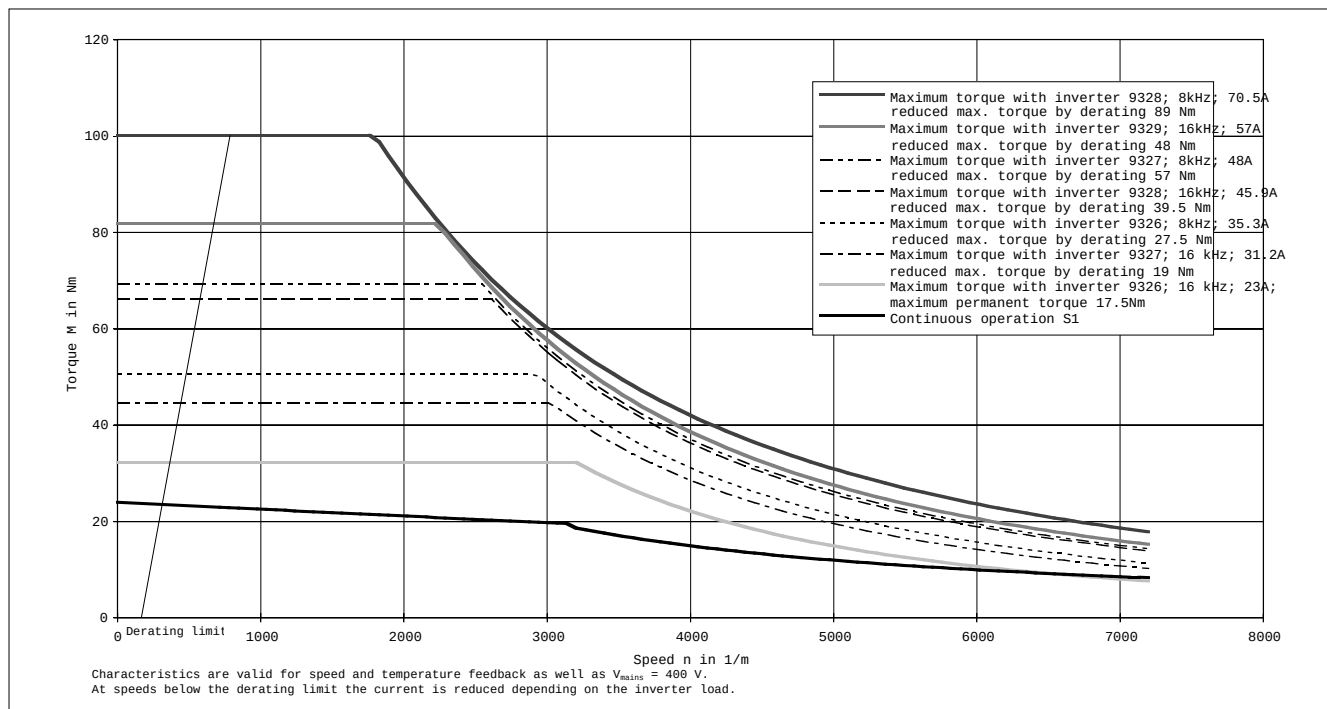




Motor-inverter combination:


Maximum and permanent torque asynchronous servo motor MDSKA 100, 80 Hz without fan
Inverters 9325-9327

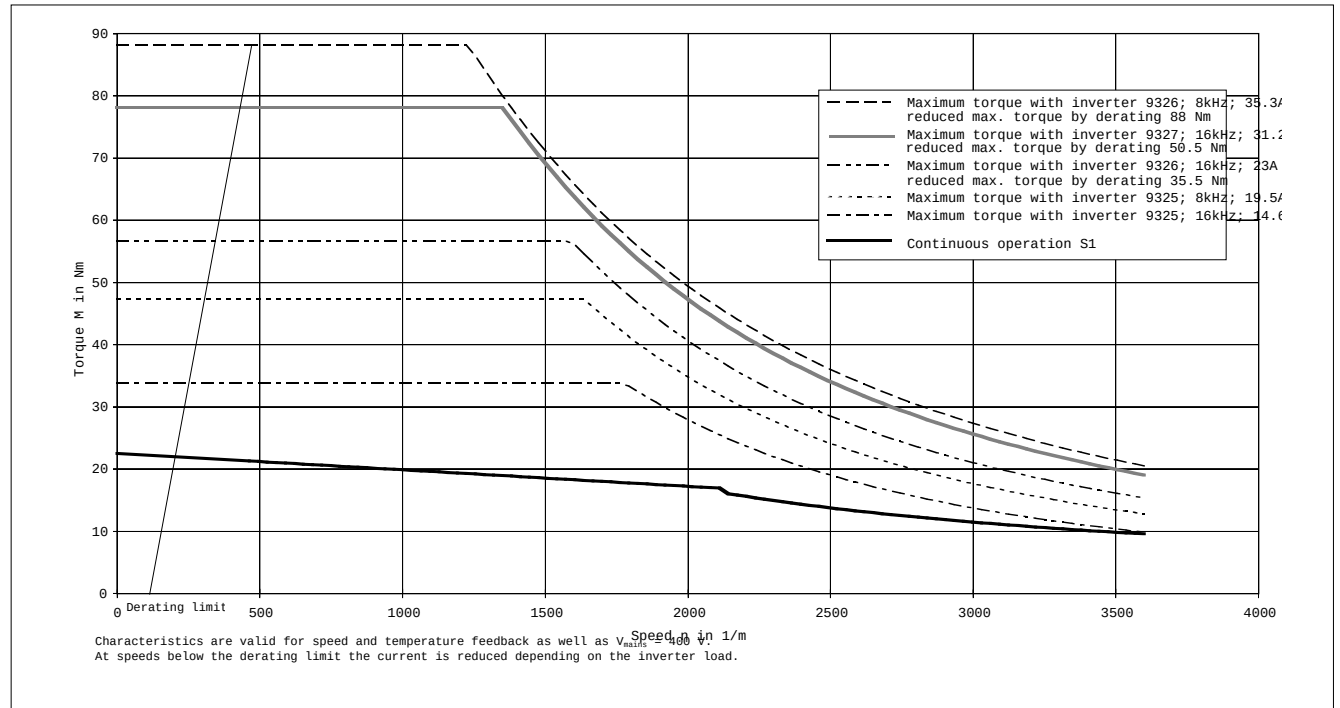

Motor-inverter combination:

Maximum and permanent torque asynchronous servo motor MDFKA 100, 60 Hz with separate fan
Inverters 9325-9329

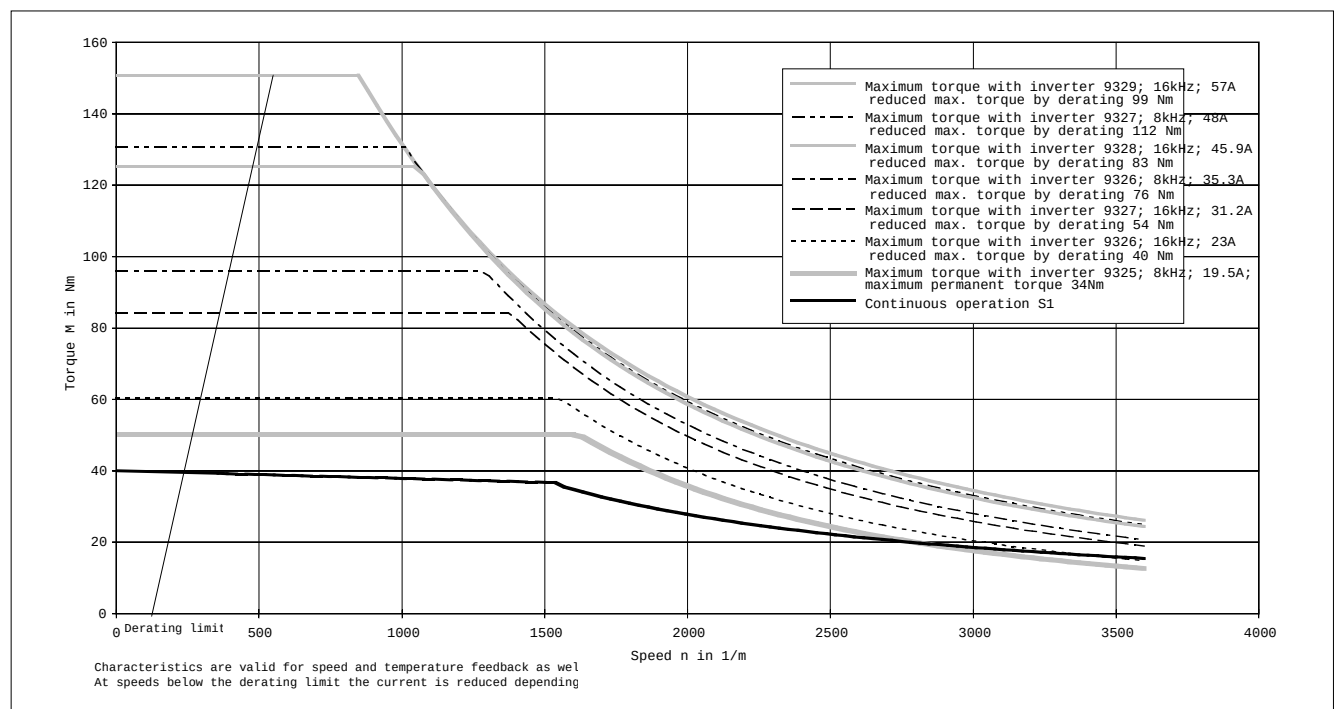




Selection

Torque-limit characteristics

Motor-inverter combination:

Maximum and permanent torque asynchronous servo motor MDSKA 100, 140 Hz without fan


Inverters 9325-9328

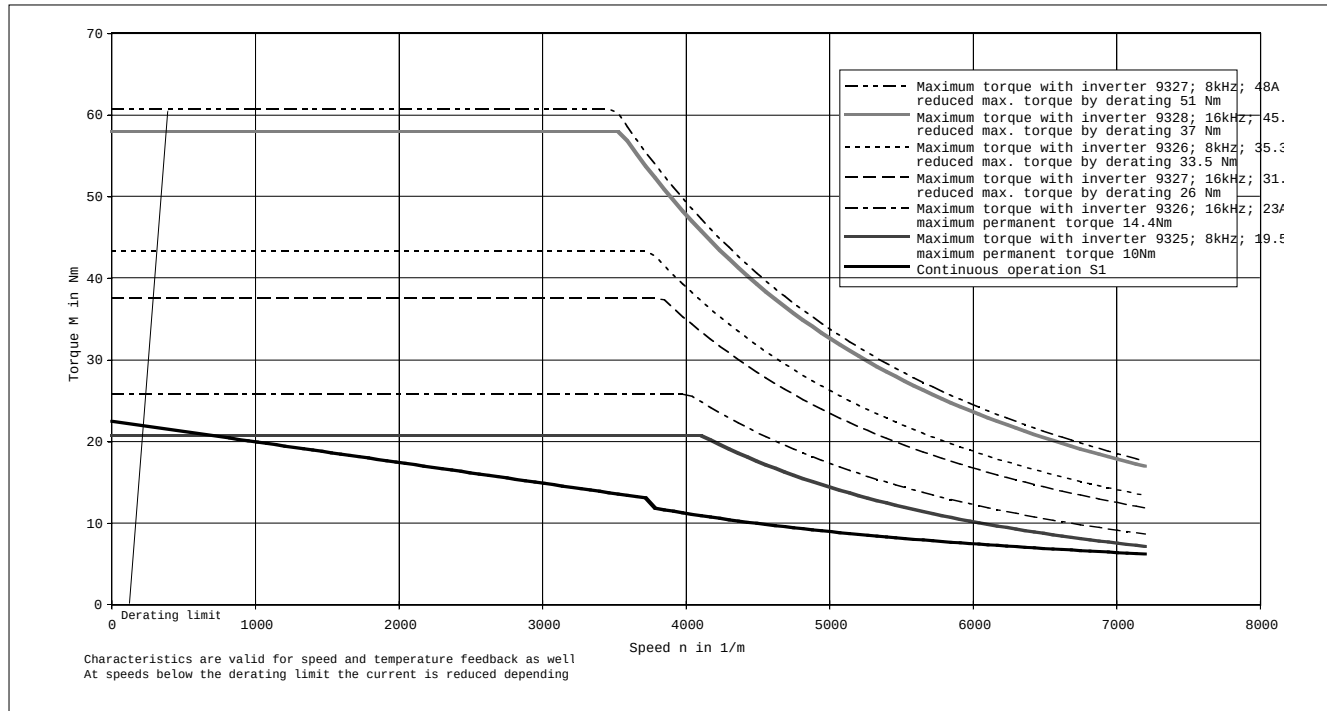


Motor-inverter combination:

Maximum and permanent torque asynchronous servo motor MDFKA 100, 120 Hz with separate fan


Inverters 9326-9331

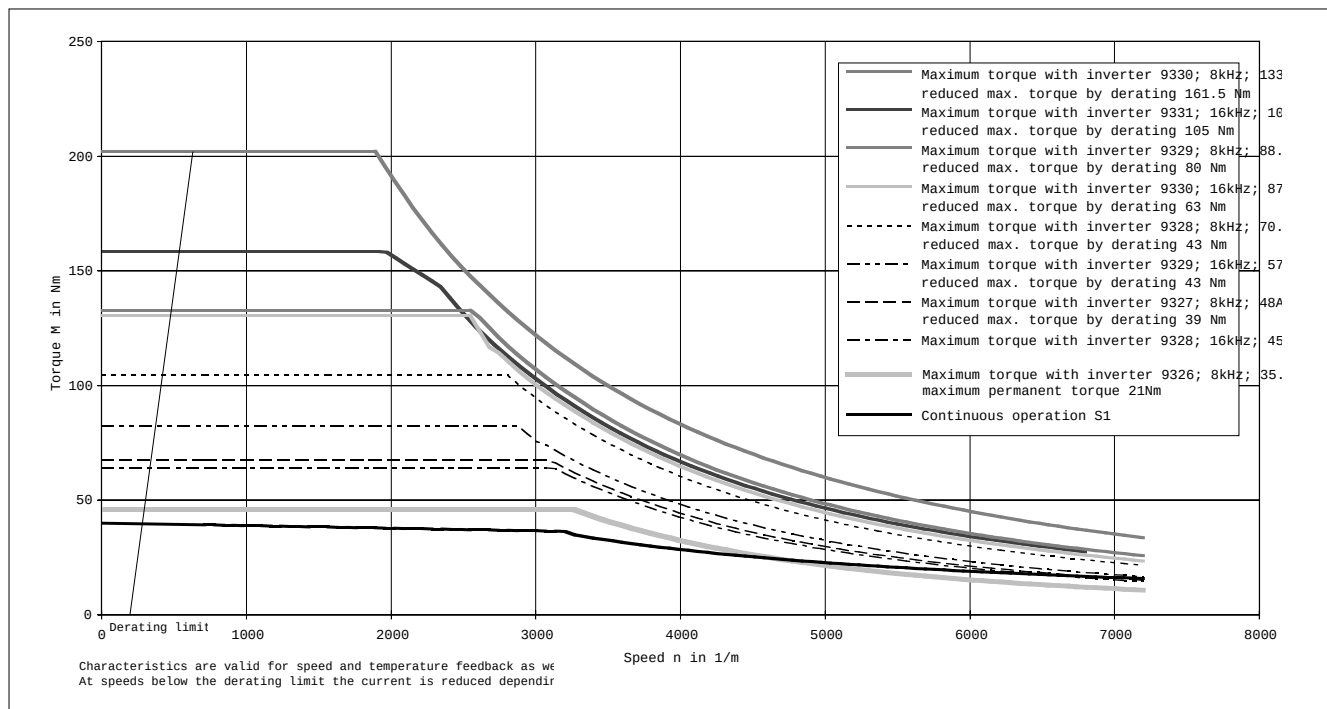




Motor-inverter combination:


Maximum and permanent torque asynchronous servo motor MDSKA 112, 85 Hz without fan
Inverters 9325-9329

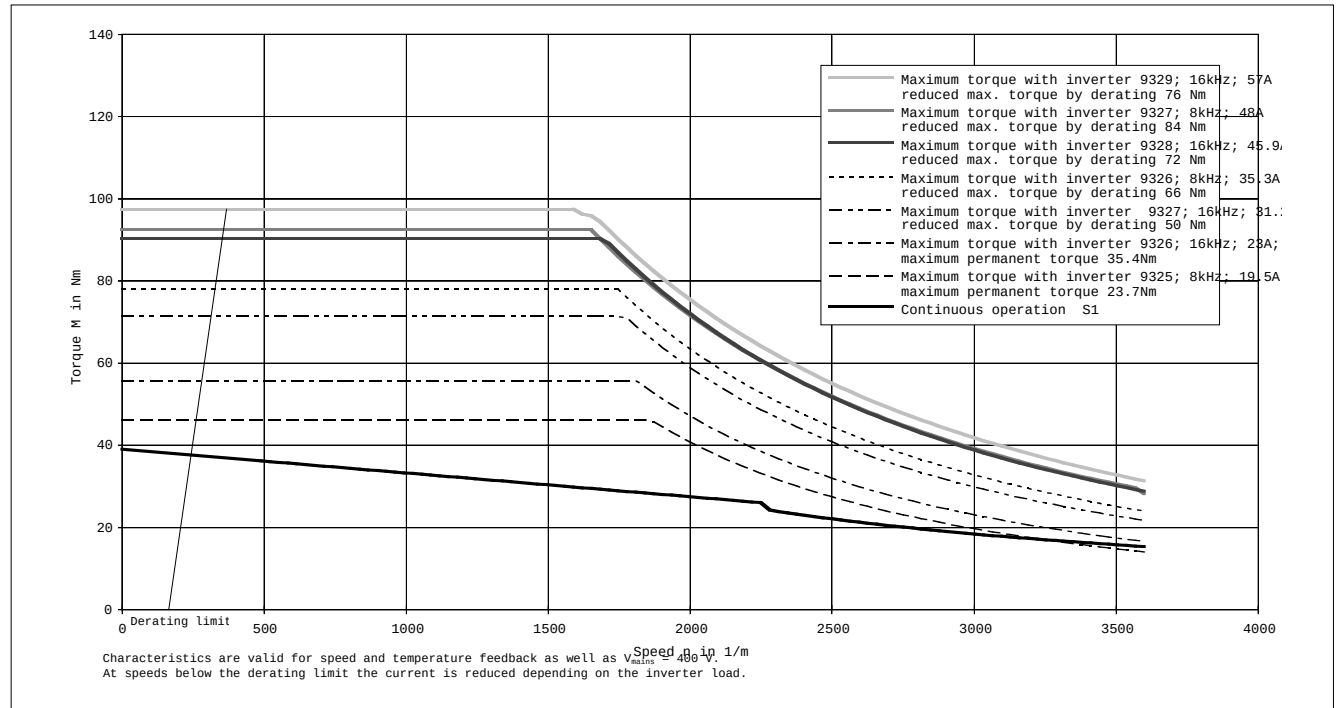

Motor-inverter combination:

Maximum and permanent torque asynchronous servo motor MDFKA 112, 60 Hz with separate fan
Inverters 9326-9330

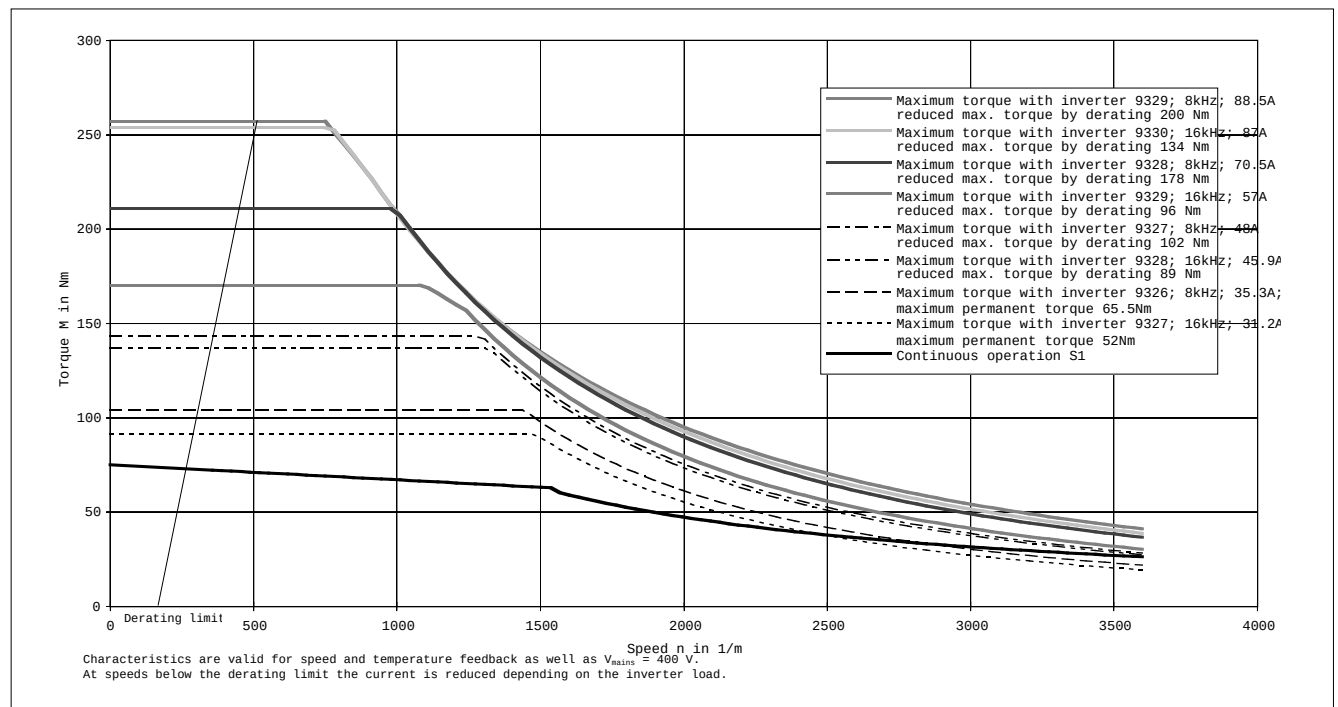




Selection

Torque-limit characteristics

Motor-inverter combination:

Maximum and permanent torque asynchronous servo motor MDSKA 112, 140 Hz without fan


Inverters 9326-9330

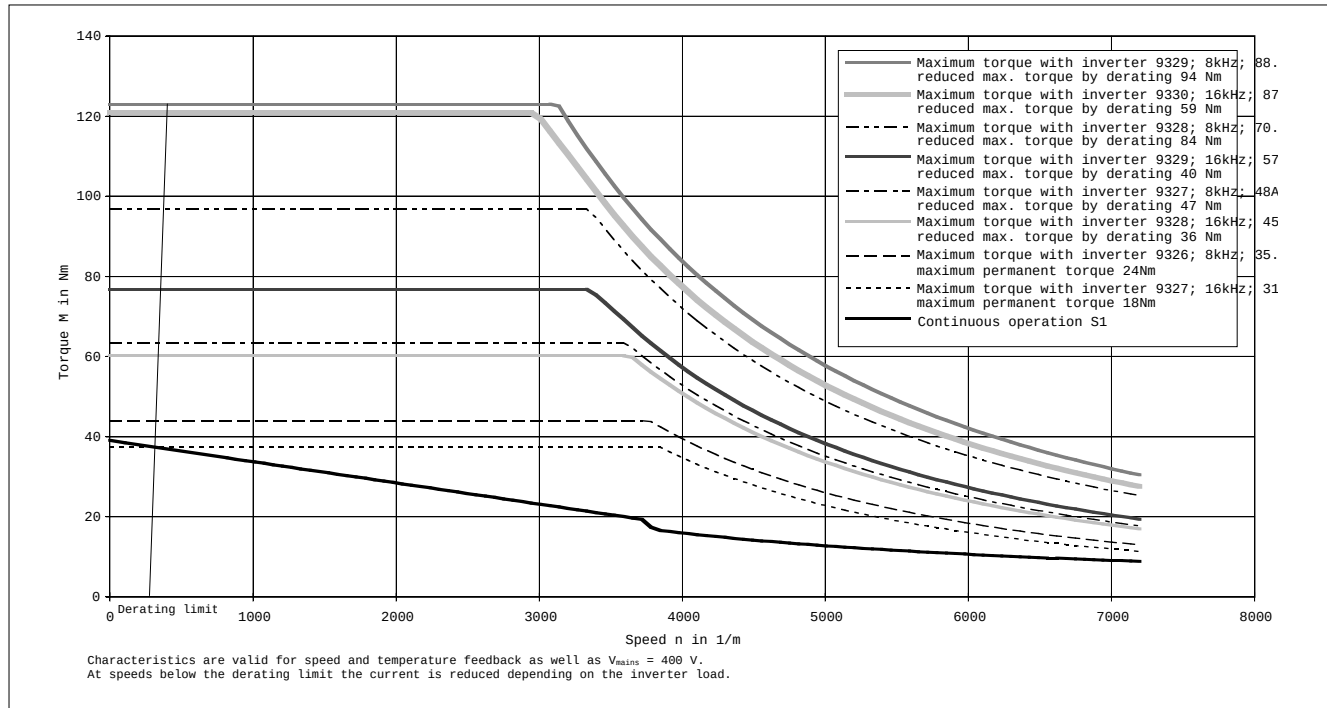


Motor-inverter combination:

Maximum and permanent torque asynchronous servo motor MDFKA 112, 120 Hz with separate fan


Inverters 9328-9332

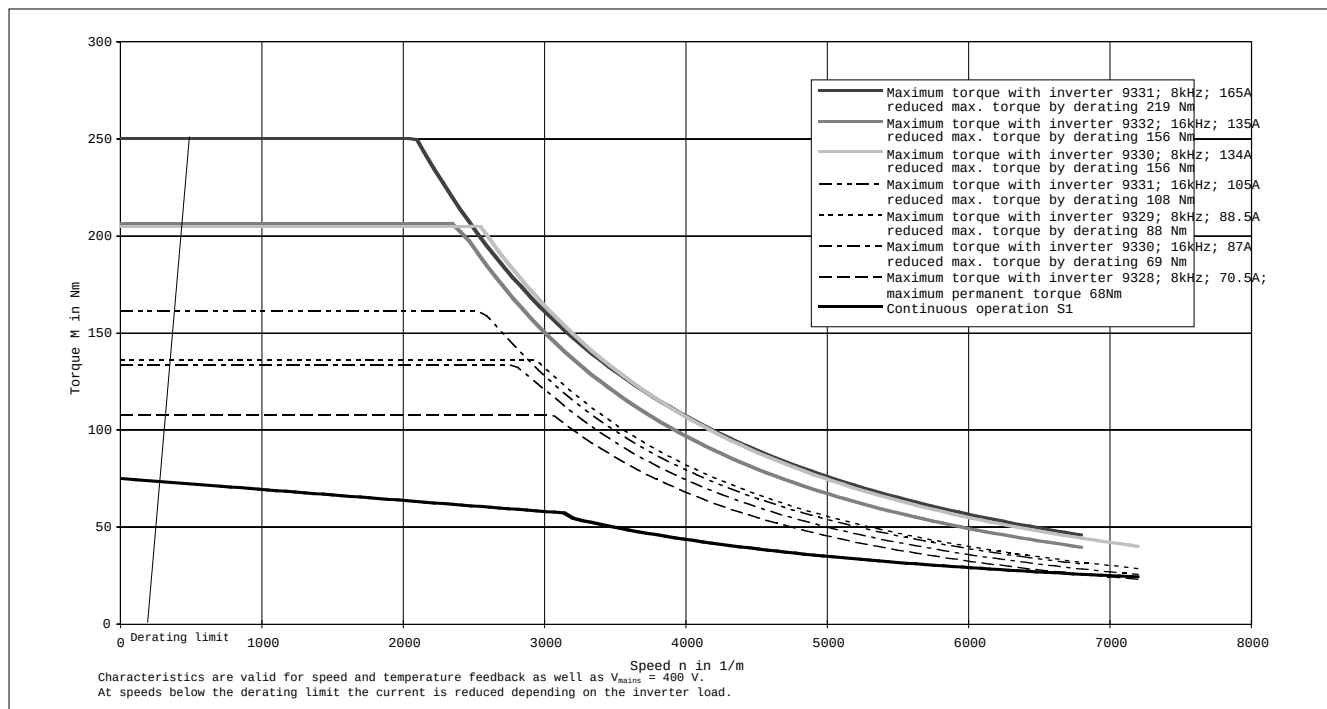




Motor-inverter combination:


Maximum and permanent torque asynchronous servo motor MDFQA 100-22, 50 Hz with separate fan in star connection
Inverters 9326-9330

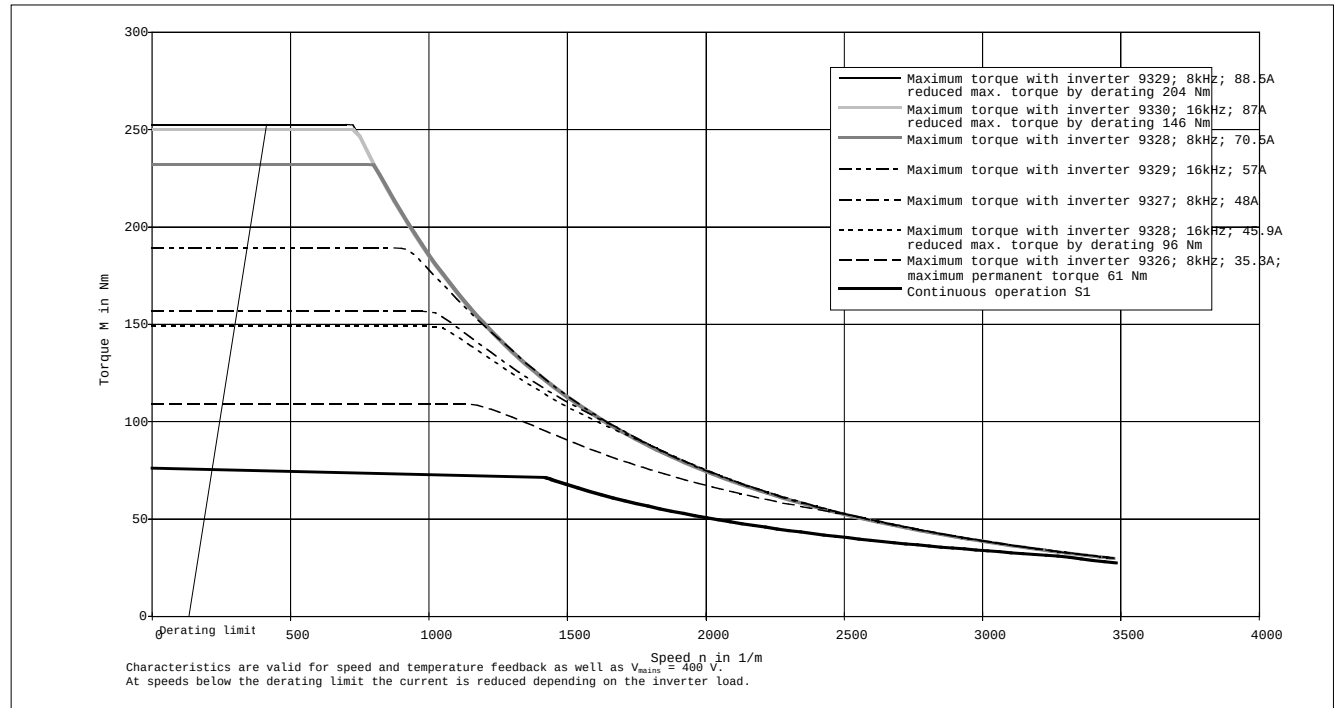

Motor-inverter combination:

Maximum and permanent torque asynchronous servo motor MDFQA 100-22, 100 Hz with separate fan in star connection
Inverters 9328-9332

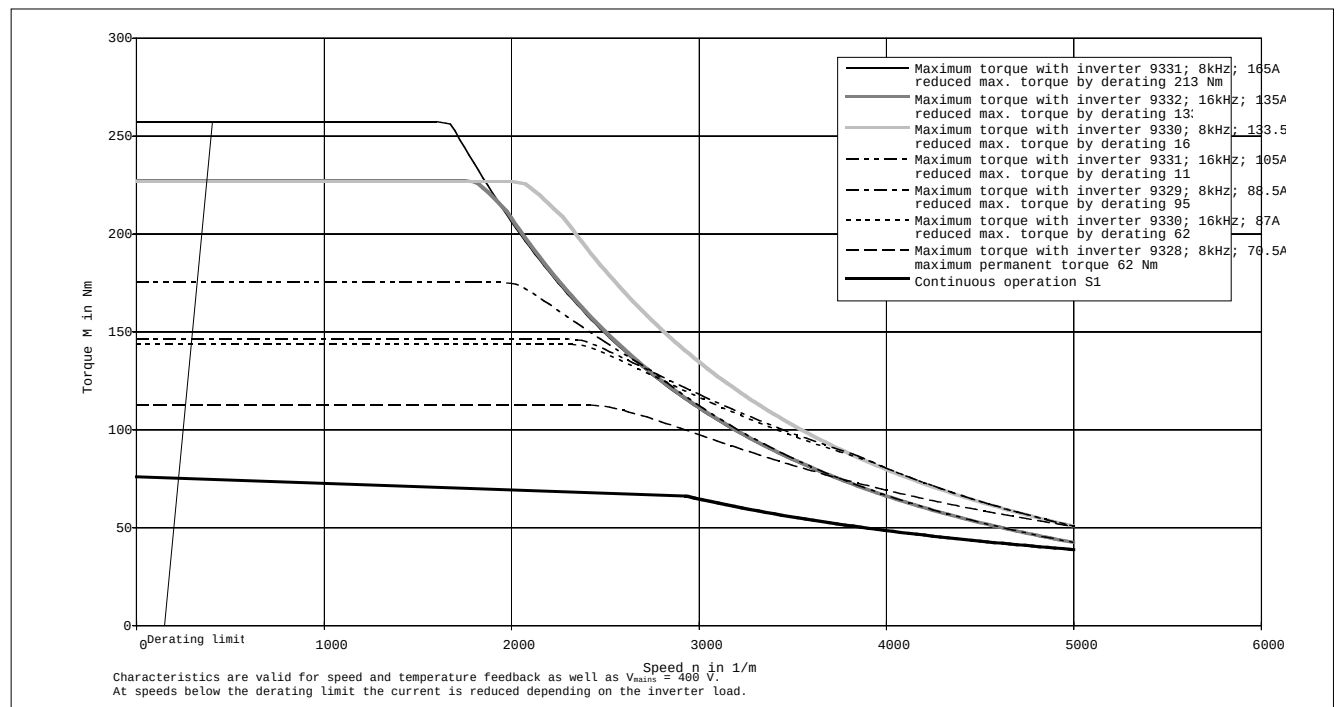




Selection

Torque-limit characteristics


Motor-inverter combination:


**Maximum and permanent torque asynchronous servo motor MDFQA 112-22, 50 Hz with separate fan in star connection
Inverters 9327-9330**

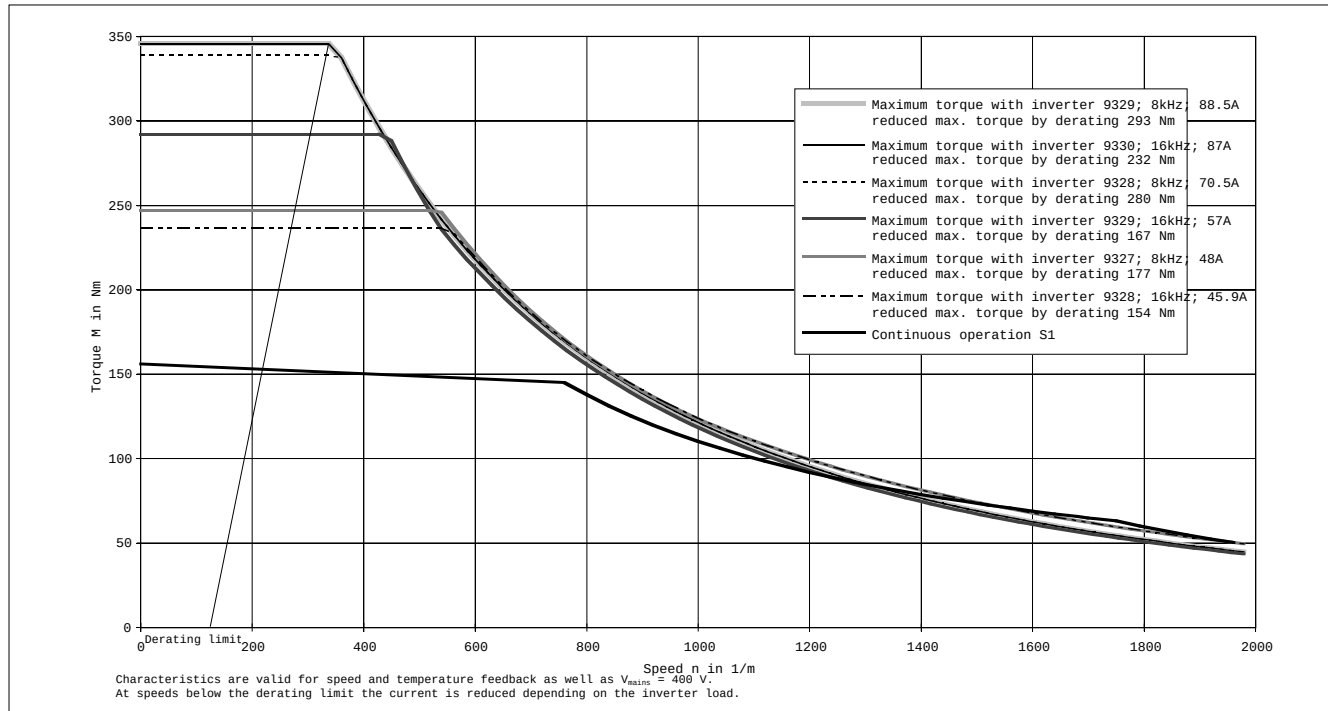

Motor-inverter combination:


**Maximum and permanent torque asynchronous servo motor MDFQA 112-22, 50 Hz with separate fan in delta connection
Inverters 9328-9331**

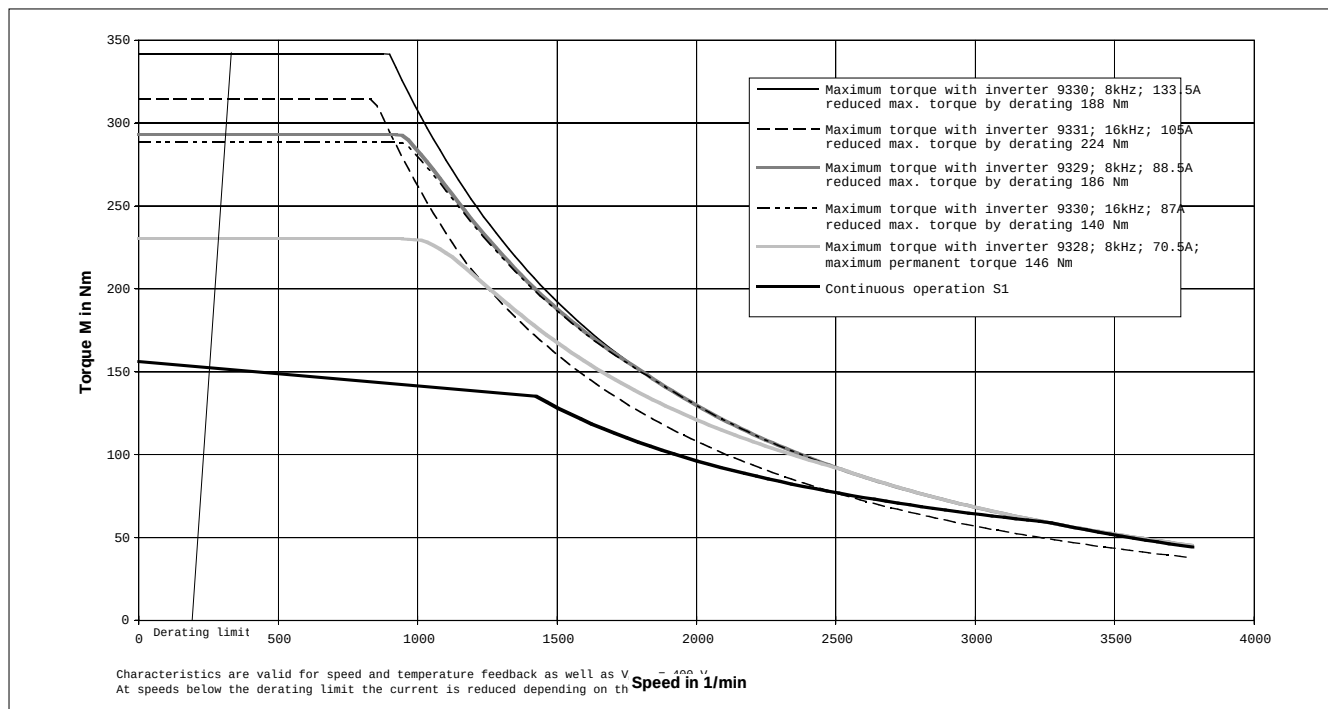




Motor-inverter combination:


Maximum and permanent torque asynchronous servo motor MDFQA 112-22, 100 Hz with separate fan in star connection
Inverters 9328-9332

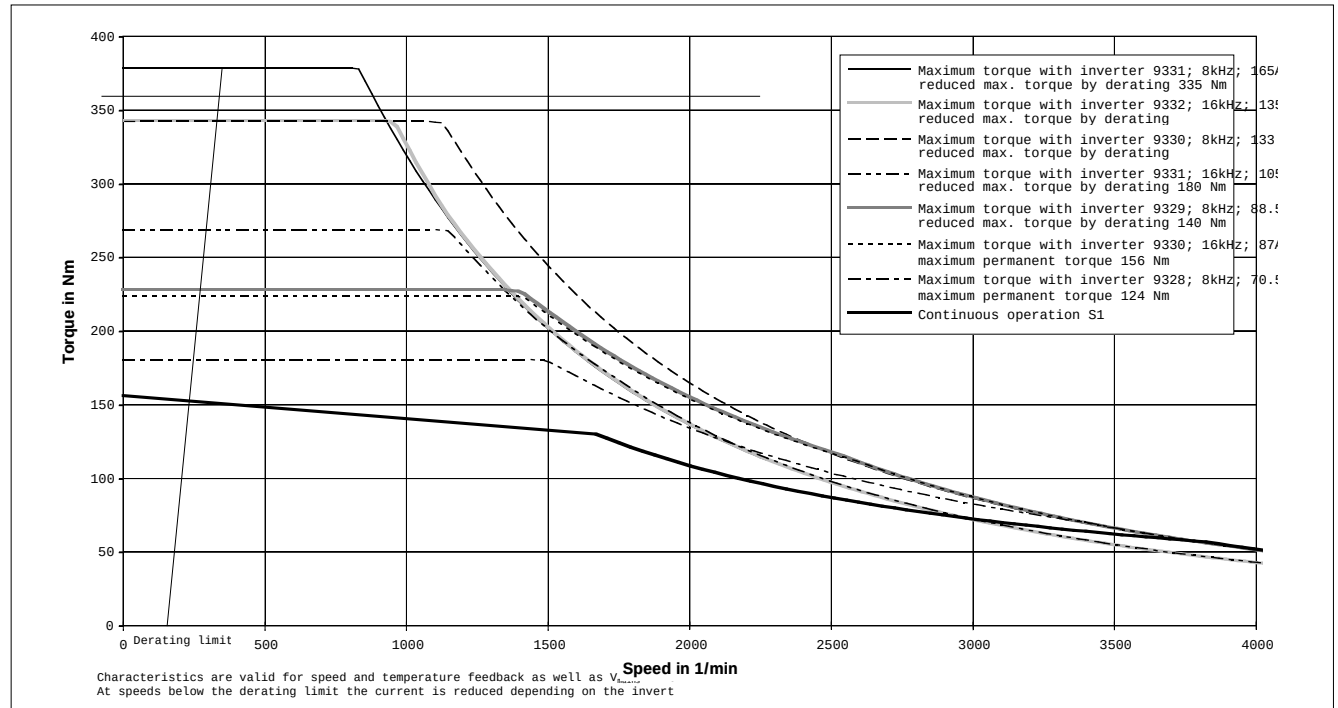

Motor-inverter combination:

Maximum and permanent torque asynchronous servo motor MDFQA 112-22, 100 Hz with separate fan in delta connection
Inverters 9330-9332

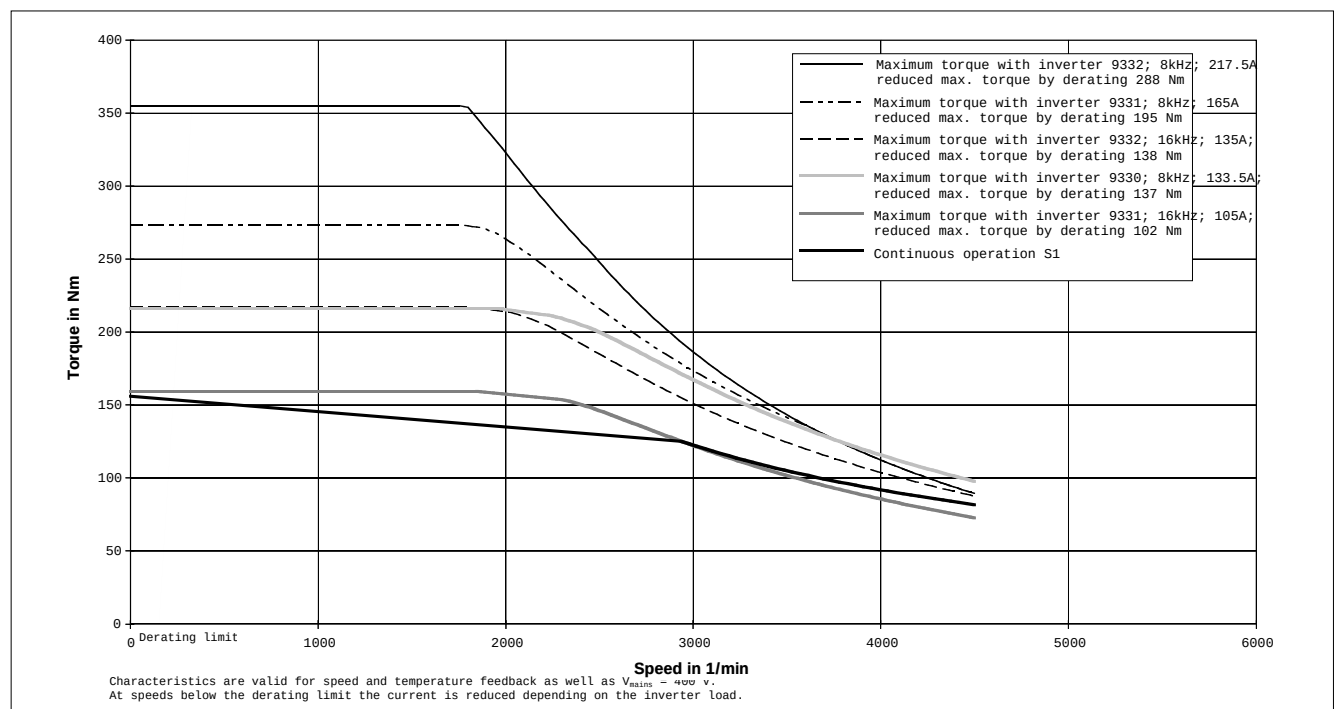




Selection

Torque-limit characteristics


Motor-inverter combination:


Maximum and permanent torque asynchronous servo motor MDFQA 132-32, 36 Hz with separate fan in star connection
Inverters 9328-9332

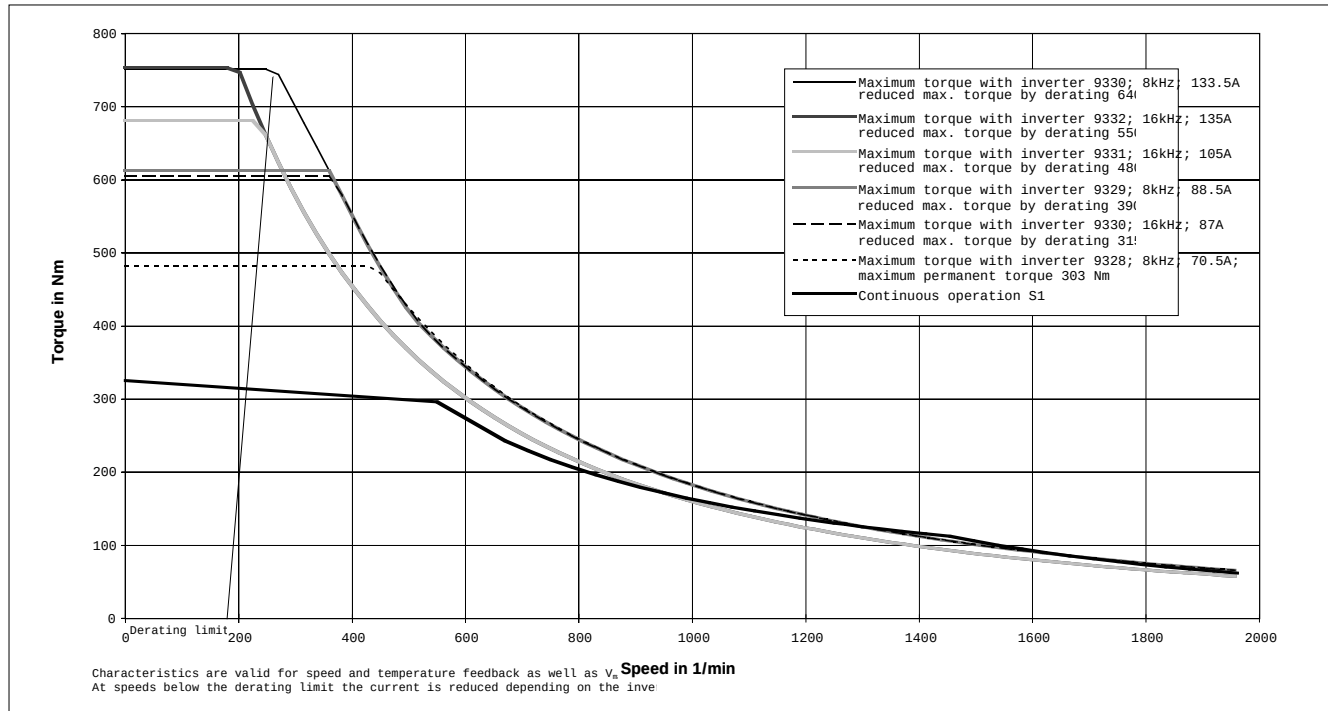

Motor-inverter combination:


Maximum and permanent torque asynchronous servo motor MDFQA 132-32, 36 Hz with separate fan in delta connection
Inverters 9330-9332

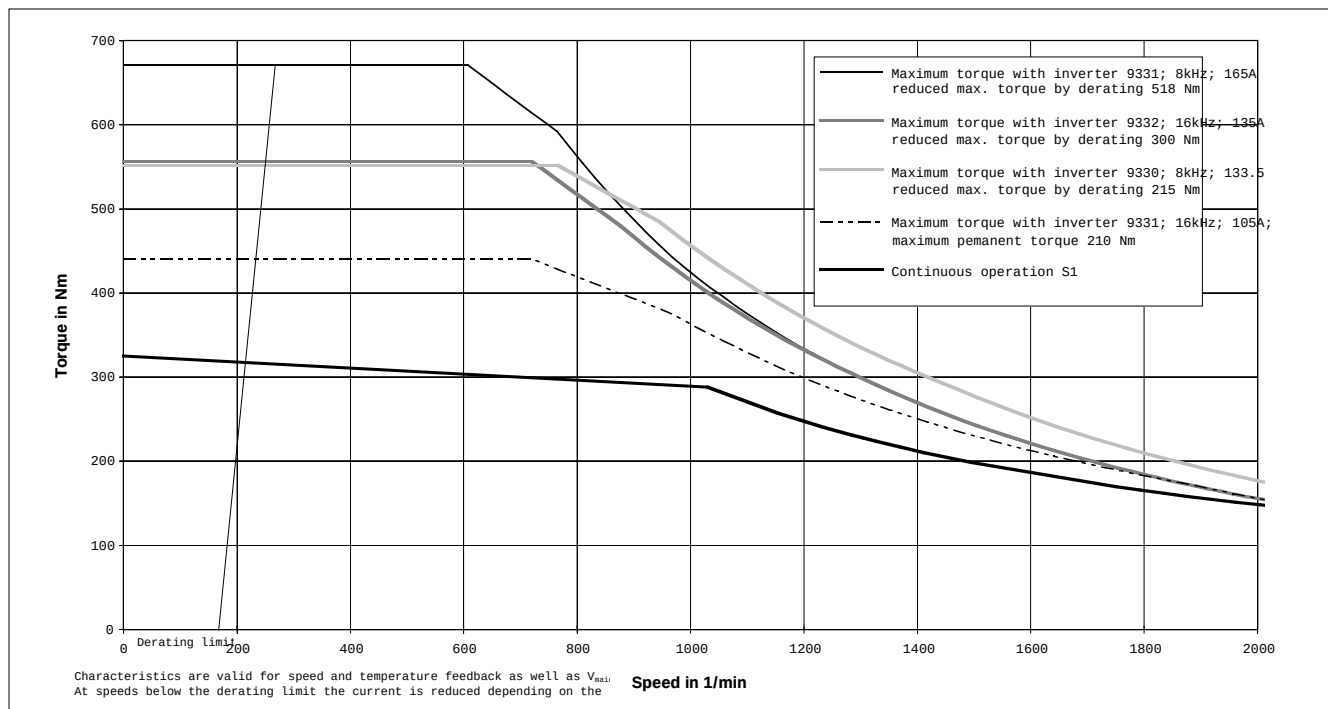




Motor-inverter combination:


Maximum and permanent torque asynchronous servo motor MDFQA 132-32, 76 Hz with separate fan in star connection
Inverters 9330-9332

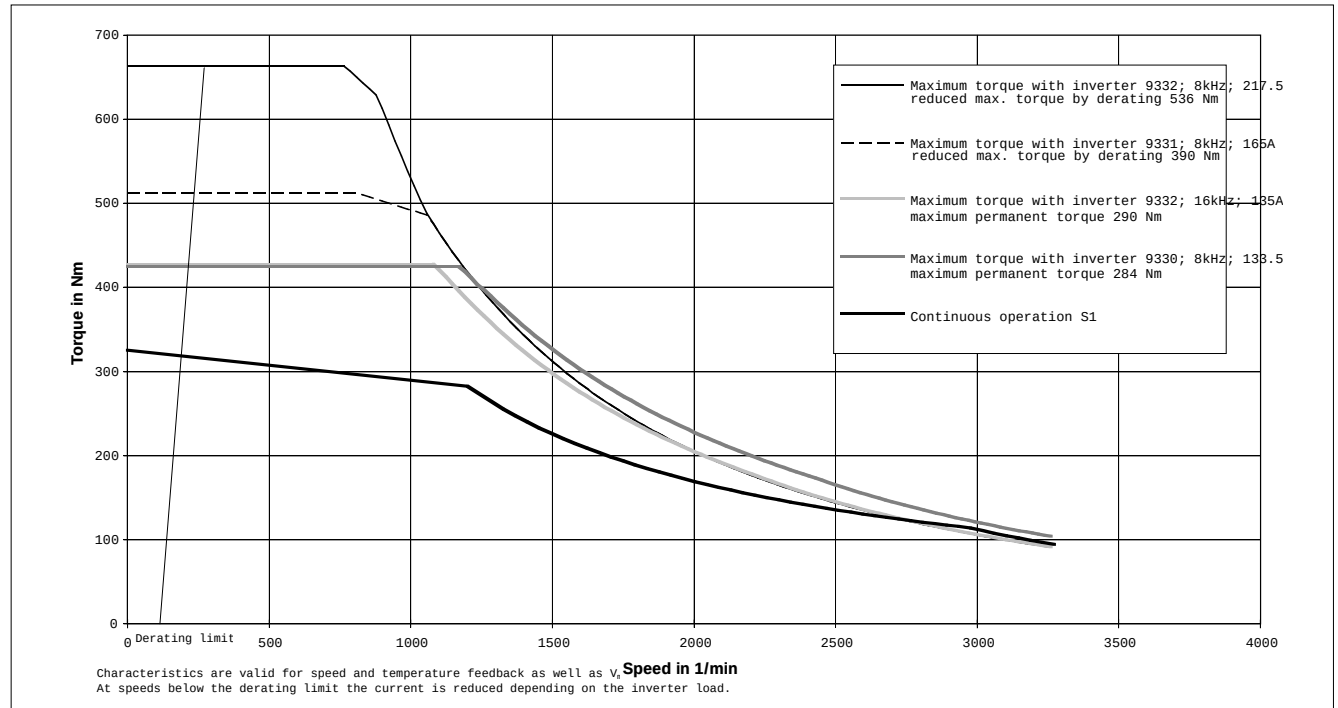

Motor-inverter combination:

Maximum and permanent torque asynchronous servo motor MDFQA 132-32, 76 Hz with separate fan in delta connection
Inverters 9330-9332

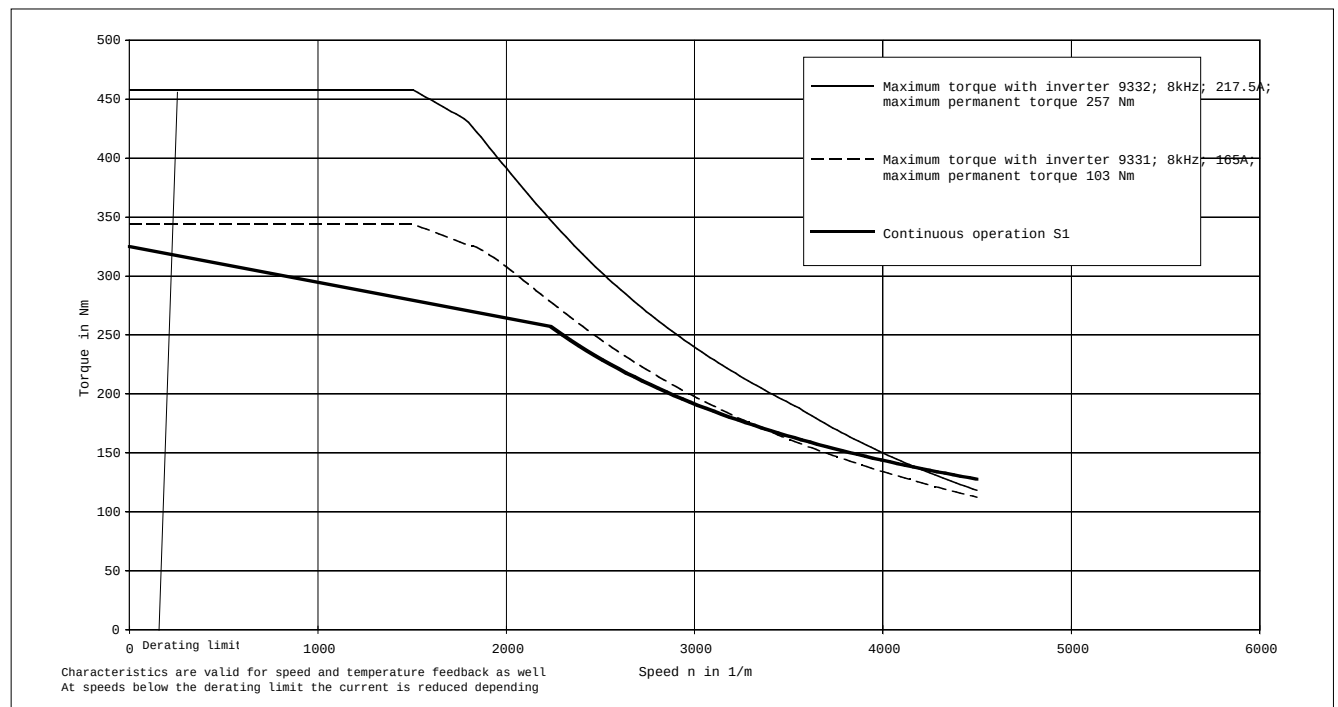




Selection


Torque-limit characteristics


Influence of ambient temperature and installation height

Synchronous servo motors MDXKS, for motors with separate fan MDFKS maximum ambient temperature 40° C

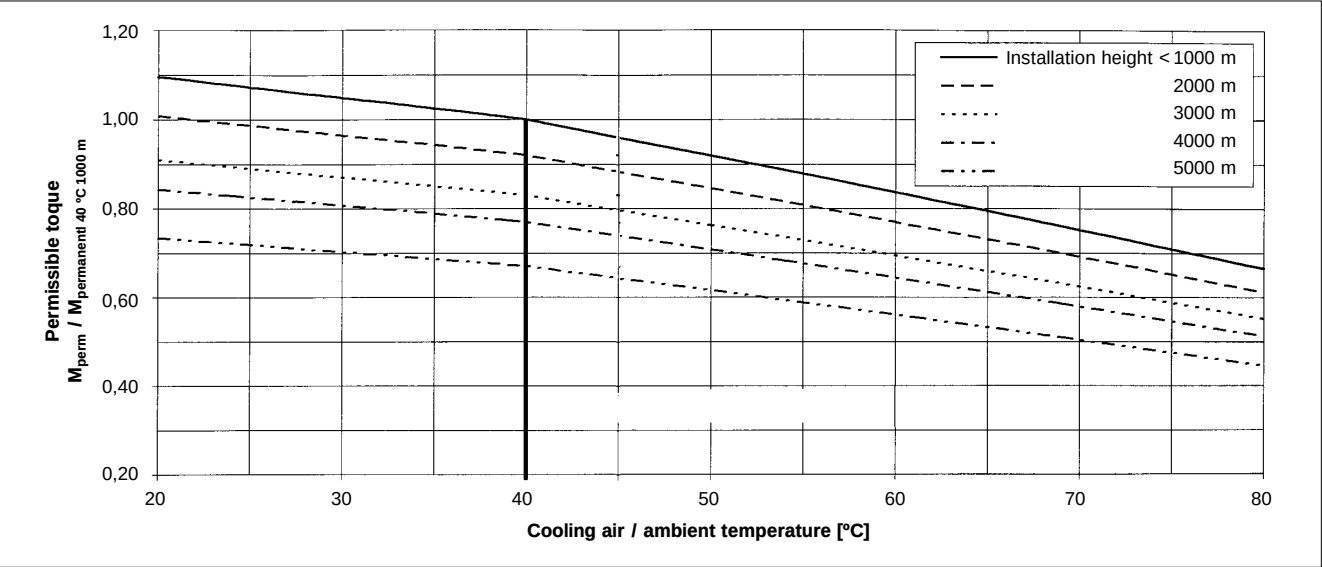

Asynchronous servo motors MDXKA and MDFQA, for motors with separate fan MDFKA and MDFQA maximum ambient temperature 40° C

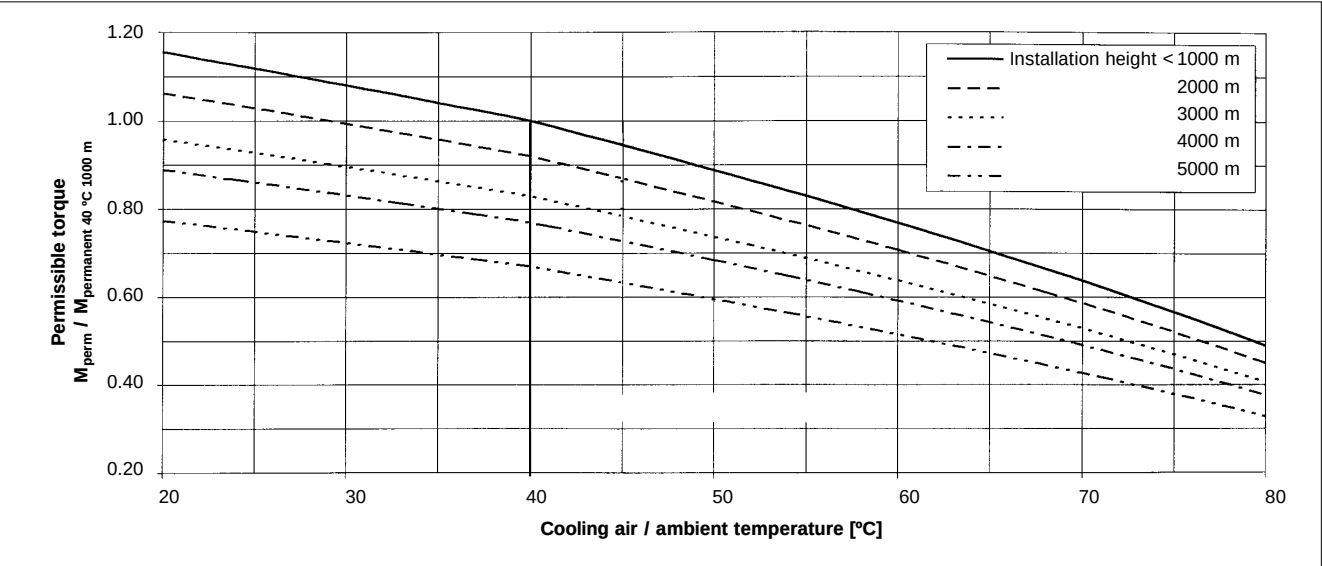




Technical data

Rated data

Permissible shaft load

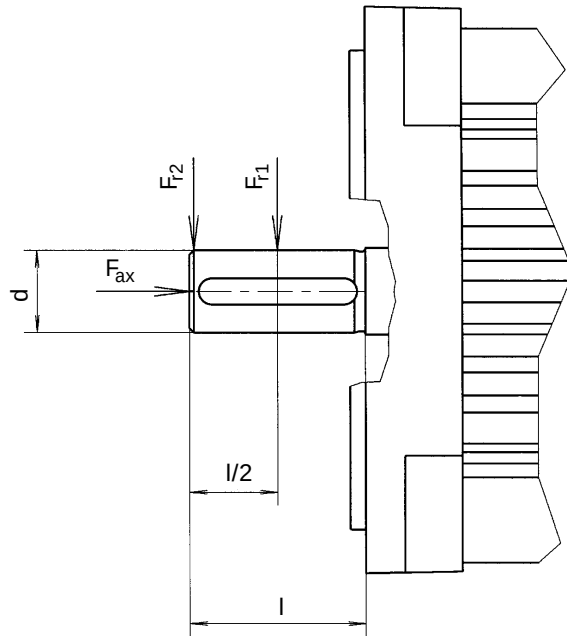

Series MDXKX (surface ventilated)

Motor type	d x l [mm]	F _a [N]	F _{r1} [N]	F _{r2} [N]
MDXKS 036	11 x 23	70	250	180
MDXKX 056	14 x 30	100	330	250
MDXKX 071	19 x 40	150	600	400
MDXKX 080	24 x 50	200	700	600
MDXKX 090	24 x 50	260	1000	900
MDXKX 100	28 x 60	500	1500	1400
MDXKX 112	38 x 80	700	2000	1700


Series MDFQA (enclosed ventilated)

Motor type	d x l [mm]	F _a [N]	F _{r1} [N]	F _{r2} [N]
MDFQA 100	38 x 80	900	2300	1000
MDFQA 112	38 x 80	1300	2300	1350
MDFQA 132	55 x 110	3500	4950	3580

Calculation basis:


Bearing life: $L_{h10} = 20.000$ h, torque $M = 2.5 M_{rated}$

Linear interpolation between F_{r1} and F_{r2} possible.



Fans

Motor type	Fan type	V_{rated} [V]	f_{rated} [Hz]	I_{rated} [A]	P_{rated} [W]
MDFK 071		210...240, 1~	50/60	0.12	19
MDFK 080		210...240, 1~	50/60	0.12	19
MDFK 090		210...240, 1~	50/60	0.32	46
MDFK 100		210...240, 1~	50/60	0.32	46
MDFK 112		210...240, 1~	50/60	0.26	60
MDFQA 100	G2D 120	380...460, 3~	50/60	0.11	60
MDFQA 100	G2D 140 with filter	380...460, 3~	50/60	0.25	150
MDFQA 100	DNG 3-4,5 with or without filter with large voltage range	350...540, 3~	50/60	0.25	100
MDFQA 112	G2D 160 with filter	380...460, 3~	50/60	0.5	320
MDFQA 112	DNG 5-12,5 with or without filter with large voltage range	350...540, 3~	50/60	0.75	390
MDFQA 132	G2D 180	380...460, 3~	50/60	0.66	415
MDFQA 132	DNG 8-12 with or without filter with large voltage range	350...540, 3~	50/60	1.4	660



Technical data

Attachments

Brake

The servo motors MDXKX can be equipped with integrated permanent magnet holding brakes for 24 V DC (industrial type 205 V).


The enclosed ventilated asynchronous servo motors MDFQA can be equipped with a 205 V or 24 V spring operated brake.

The brakes are active after switching off the power supply (normally on principle).

When using the brakes for holding applications only, the friction linings are virtually resistant to wear. If the permissible friction work is not exceeded, at least 150 emergency stop operations are possible.

Motor type	M _B [Nm]	V _{rated 24} [V]	I ₂₄ [A]	V _{rated 205} [V]	I ₂₀₅ [A]
MDSKXBX 036	2.5	24 (+5%, -10%)	0.50	205 (+5%, -10%)	0.06
MDSKXBX 056 with direct gearbox connection	2.5 5	24 (+5%, -10%) 24 (+5%, -10%)	0.50 0.67	205 (+5%, -10%) 205 (+5%, -10%)	0.06 0.08
MDXKXBX 071 with direct gearbox connection	10 12	24 (+5%, -10%) 24 (+5%, -10%)	0.67 0.75	205 (+5%, -10%) 205 (+5%, -10%)	0.08 0.09
MDXKABX 080 with direct gearbox connection	12 20	24 (+5%, -10%) 24 (+5%, -10%)	0.75 1.00	205 (+5%, -10%) 205 (+5%, -10%)	0.09 0.12
MDXKABX 090 with direct gearbox connection	20 20	24 (+5%, -10%) 24 (+5%, -10%)	0.75 1.00	205 (+5%, -10%) 205 (+5%, -10%)	0.09 0.12
MDXKABX 100 with direct gearbox connection	40 40	24 (+5%, -10%) 24 (+5%, -10%)	1.00 1.46	205 (+5%, -10%) 205 (+5%, -10%)	0.12 0.18
MDXKABX 112 with direct gearbox connection	80 80	24 (+5%, -10%) 24 (+5%, -10%)	1.46 1.46	205 (+5%, -10%) 205 (+5%, -10%)	0.18 0.18
MDFQABX 100	80 150	24 (+5%, -10%) 24 (+5%, -10%)	2.29 3.54	205 (+5%, -10%) 205 (+5%, -10%)	0.27 0.41
MDFQABX 112	150 240	24 (+5%, -10%) 24 (+5%, -10%)	3.54 4.17	205 (+5%, -10%) 205 (+5%, -10%)	0.41 0.49
MDFQABX 132	240 360	24 (+5%, -10%) 24 (+5%, -10%)	4.17 4.58	205 (+5%, -10%) 205 (+5%, -10%)	0.49 0.54

The employed brakes are no safety brakes in the real sense of the word, i.e. in case of disruption by not influencable factors, like penetration of oil or failure of the A-side shaft seal, a reduction of torque may occur.



Motor type	t ₁ , t _{is} ¹⁾ [ms]	t ₂ , t _{auf} [ms]	Q _E ²⁾ [kJ]	Shü ³⁾ [1/h]	J _B [kgcm ²]	m [kg]
MDSKXBX 036	8	18	3.2	31	0.38	0.85
MDSKXBX 056 with direct gearbox connection	8 13	18 22	3.2 6.5	31 23	0.38 1.06	0.85 0.75
MDXKXBX 071 with direct gearbox connection	20 24	29 30	6.5 12.0	23 17	1.06 3.60	0.83 1.38
MDXKABX 080 with direct gearbox connection	24 28	30 55	12.0 25.0	17 12	3.60 3.60	1.45 1.45
MDXKABX 090 with direct gearbox connection	25 28	50 55	12.0 25.0	17 12	3.60 9.50	1.54 2.42
MDXKABX 100 with direct gearbox connection	28 40	73 100	25.0 50.0	12 9	9.50 31.80	2.72 4.79
MDXKABX 112 with direct gearbox connection	53 53	97 97	50.0 50.0	9 9	31.80 31.80	4.98 4.98
MDFQABX 100	90 110	180 300	37 60	27 20	15.00 29.00	13.5 20
MDFQABX 112	110 200	300 400	60 80	20 19	29.00 73.00	21.5 31
MDFQABX 132	200 270	400 500	80 120	19 17	73.00 200.00	32.5 46

- 1) Engagement time for DC switching, for AC switching t_{is} prolonged by approx. factor 4
2) Max. friction work per switching operation with n = 1500 min⁻¹
3) Transference operating frequency to VDI 2241 to detect the permissible operating frequency or friction work


With long motor cables and especially with 24V brakes, the ohmic voltage drop along the cable must be observed and compensated by a higher voltage input – otherwise, the voltage applied to the brake will not be high enough (24V or 205V).

For Lenze system cables the following applies:

$$\Delta V_B = 0.08 \cdot l_{\text{cable}} [\text{m}] \cdot I_B [\text{A}]$$

If the voltage applied to the brake is not correct (too high, too low, wrong polarity), the brake is activated immediately and can be overheated and destroyed by the still rotating motor.

Shortest switching times of the brake can be reached by DC switching of the voltage. A spark suppresser avoids voltage peaks.



Technical data

Attachments


Angle and speed encoder for servo motors MDXK and MDXQ

Encoder	Resolver	Incremental encoder	Sin-Cos encoder single turn	Sin-Cos encoder multi turn
Available for				
Synchronous servo motor MDXKS	●		●	●
Asynchronous servo motor MDXKA (surface cooled)	●	●	●	●
Asynchronous servo motor MDXQA (enclosed ventilated)	●	●	●	●
Designation	RS	IT2048	AS512	AM512
Type		ITD21	SCS70	SCM70
Signals		2048 bars TTL signals	512 periods, sine signals 1 Vss asynchronous half-duplex interface RS485 for transmission of the absolute position	
Resolution	0.8'	2.6'	0.4'	0.4'
Accuracy	+/- 10' bzw. +/- 4' when entering the correction code	+/- 2' depending on no. of bars	+/- 0.8'	+/- 0.8'
Absolute positioning	1 revolution	no	1 revolution	4096 rev.
Note	Standard solution for most applications	Incremental encoder instead of resolver	Sin-Cos encoder instead of resolver current position via interface of the 9300. Operation only possible after encoder selection at 9300 (encoder type and voltage supply), values saves, and unit switched off and on again.	

Resolver (built-in encoder)

Stator-fed resolver with 2 stator windings turned by 90° and a rotor winding with transformer winding.

Design	Brushless hollow shaft resolver in pancake-design	
Max. speed (permanent)	8000 min ⁻¹	
Max. speed (short time)	10000 min ⁻¹	
Input voltage	10 V amplitude	
Input frequency	4 kHz	
Ratio stator / rotor	0.3 ± 5 %	
Rotor impedance Z _{ro}	51 Ω + j90 Ω	
Stator impedance Z _{s0}	102 Ω + j150 Ω	
Impedance Z _{rs}	44 Ω + j76 Ω	
Insulation resistance	> 10 MΩ with 500 V DC	
No. of pole pairs	1	
Max. phase error	± 10 angular minutes	



Sin-Cos absolute value encoder (built-in encoder)

Absolute value encoder with 2 sine-wave signals displaced by 90° with 512 periods per revolution and serial interface RS 485 for the transmission of

parameters and the absolute position within one or 4096 revolutions.

Type	SCS 70
Design	Brushless hollow shaft encoder
Maximum torque	12000 min ⁻¹
No. of revolutions absolutely resolved	1 (single turn)
No. of periods	512 periods / rev.
Output signals	2 sine-wave signals displaced by 90° with 1 V _{SS} , serial interface RS 485, asynchronous, half duplex
Limit frequency	100 kHz
Voltage supply	7 ... 12 V
Current consumption	100 ... 130 mA


Type	SCM 70
Design	Brushless hollow shaft encoder
Maximum torque	12000 min ⁻¹
No. of revolutions absolutely resolved	4096 (multi turn)
No. of periods	512 periods / rev.
Output signals	2 sine-wave signals displaced by 90° with 1 V _{SS} , serial interface RS 485, asynchronous, half duplex
Limit frequency	100 kHz
Versorgung	7 ... 12 V
Current consumption	100 ... 130 mA

Incremental encoder (built-in encoder)

Encoder with 2 TTL square-wave signals displaced by 90° with 2048 pulses per revolution and additional zero track.

This encoder is optionally available as preference feedback to the resolver for motor series MDFQA.

Type	ITD 21
Design	Brushless hollow shaft encoder
Maximum torque	8000 min ⁻¹
No. of pulses	2048 pulses / rev.
Output signals	2 square-wave signals displaced by 90°, zero pulse, complementary TTL signals, V _{low} ≤ 0.5 V, V _{high} ≥ 2.5 V
Voltage supply	5 V ± 5 %, protect against polarity reversal
Current consumption	≤ 150 mA
Limit frequency	300 kHz




Technical data

Attachments

Temperature sensor KTY 83-110 (integrated)

The KTY temperature sensor continuously measures the motor temperature. It represents, though, no complete protection. The signals are fed back to the servo inverter 9300 via the system feedback cable. When feeding the encoder with a measuring current of 1 mA, temperature and resistance show the following characteristic:

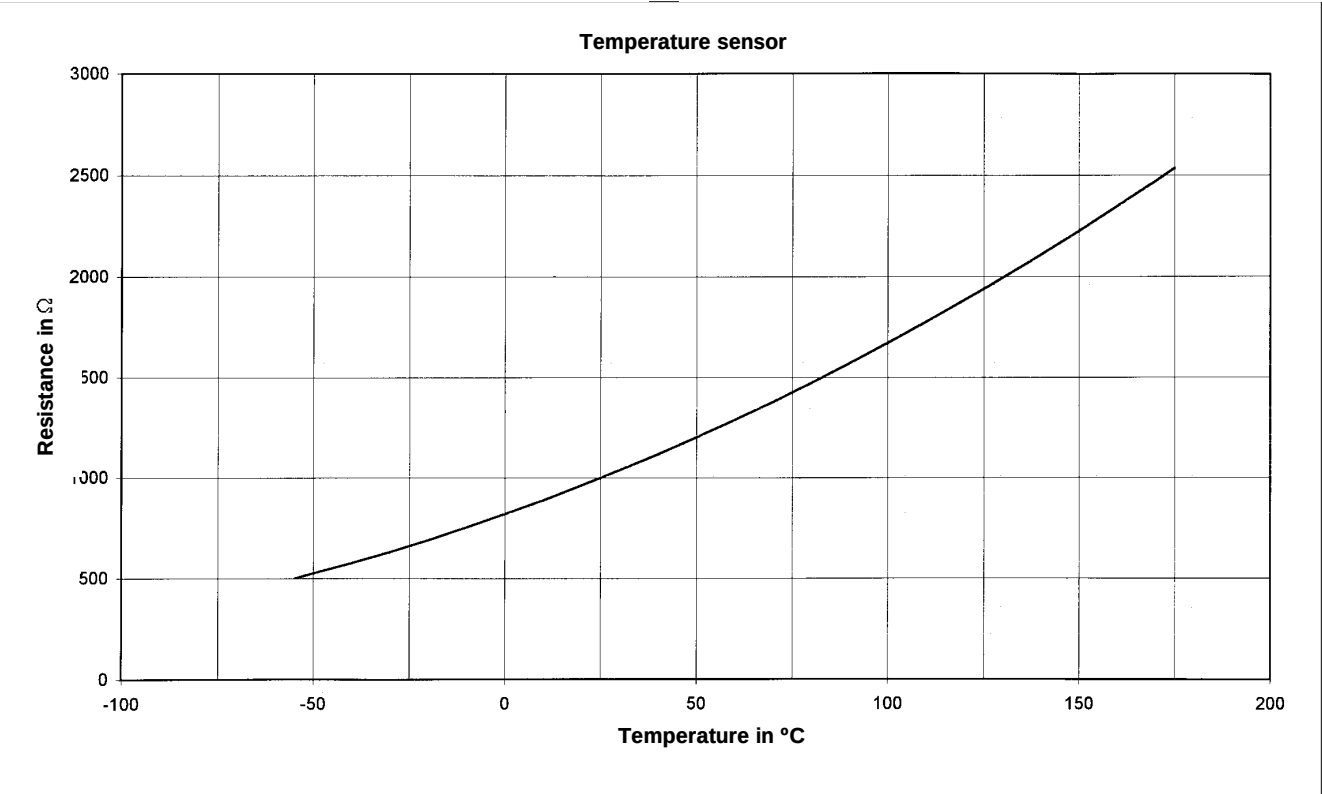


Temperature switch – normally closed contact

As alternative to the continuous sensor KTY, with the MDFQA it is also possible to use a temperature contact to monitor the windings. Asynchronous motors of the series MDFQA are equipped with both temperature monitoring.

Technical data

	AC connection	DC connection		
Release temperature	150 °C ± 5 °C			
Reset temperature	90...135 °C			
Connection voltage	250 V ≈	60 V	48 V	24 V
Rated current [A]	2.5 A	1.0 A	1.25 A	1.6 A




Plug-in connectors for motor connection


Power connection, brake connection

	Pin no.	Terminal designation
Holding brake +UB	1	Y1
Holding brake -UB	2	Y2
Earth PE	⏏	⏏
Motor power phase U	4	1, U1
Motor power phase V	5	2, V1
Motor power phase W	6	3, W1
Global Drive system cables		
Standard cable	EWLMxxxGM-015C	MDXK036...090
	EWLMxxxGM-025	MDXK036...090
	EWLMxxxGM-040	MDXKA100...112
	EWLMxxxGM-100	MDXKA100...112
Trailing cable	EWLMxxxGMS025	MDXKA036...090
	EWLMxxxGMS040	MDXKA100...112
Intermediate cable	EWLMxxxZM-015	MDXKA036...090

MDXK 036...090

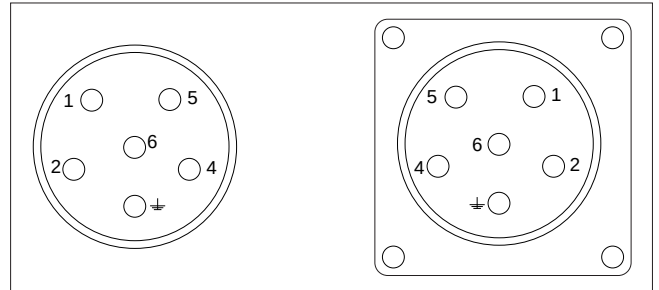


MDXKA 100...112

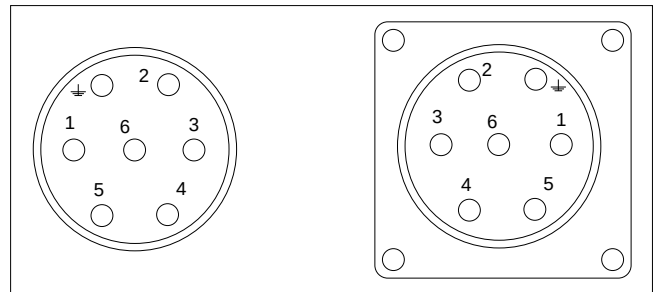


Fan connection

	Pin no.	Terminal designation
Earth PE	2	⏏
Fan power L1	A	U1
Fan power N	B	U2
Global Drive system cables		
Standard cable	EWLLxxxGM	
Trailing cable	EWLLxxxGMS	
Intermediate cable	EWLLxxxZM	

MDXK

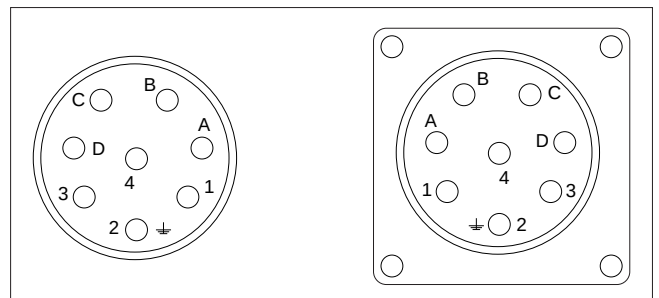



9300

Technical data


Motor connection

Plug-in connectors for motor connection

Resolver connection

	Pin no.	Terminal designation
+Ref., transformer / reference winding	1	B1
-Ref., transformer / reference winding	2	B2
+Cos, stator winding	4	B4
-Cos, stator winding	5	B5
+Sin, stator winding	6	B6
-Sin, stator winding	7	B7
Temperature sensor +KTY	11	T1
Temperature sensor -KTY	12	T2
Global Drive system cables		
Standard cable	EWLRxxxGM-T	
Intermediate cable for trailing	EWLRxxxZMST	
Intermediate cable	EWLRxxxZM-T	


MDXK, MDFQA

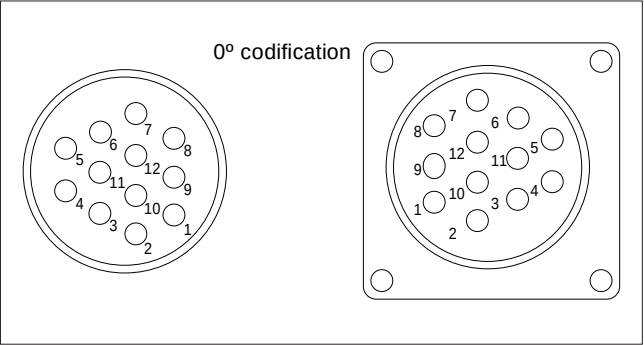


Connection of Sin-Cos absolute value and incremental encoder

	Pin no.	Terminal designation
Track +B / +SIN	1	B5
Track -A / -COS	2	B4
Track +A / +COS	3	B3
Supply VCC	4	B1
Mass GND	5	B2
Track -0, -Z / -RS485	6	B8
Track +0, +Z / +RS485	7	B7
Track -B / -SIN	9	B6
Temperature sensor +KTY	11	T1
Temperature sensor -KTY	12	T2
Global Drive system cables		
Standard cable	EWLExxxGM-T	


MDXK, MDFQA

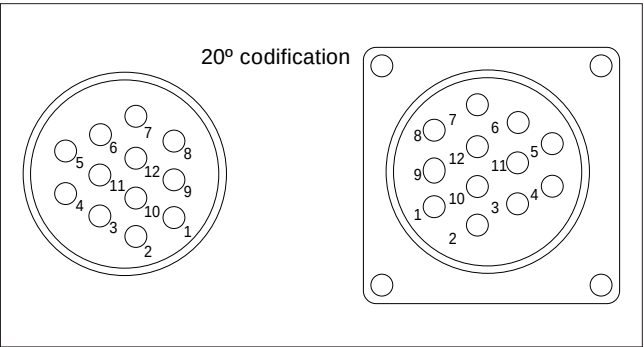




Dimensions of plugs and sockets


Power plug size 036...090

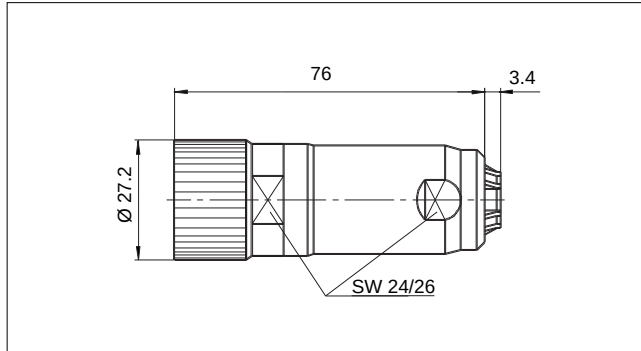


Right angle socket motor size 036...090

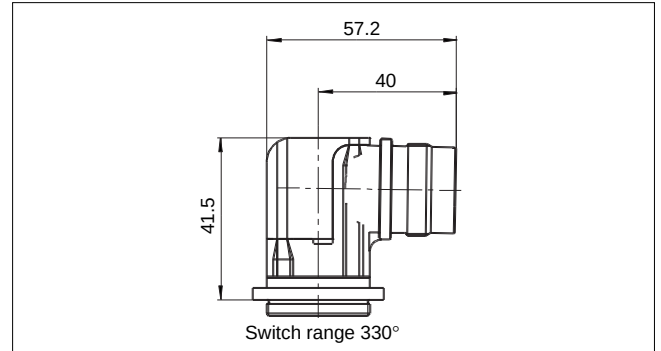


Power plug size 100...112

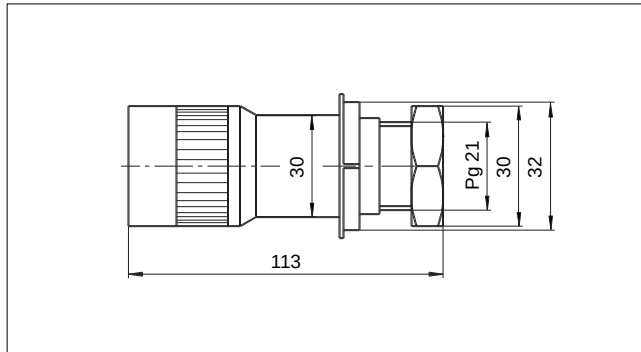


Right angle socket motor size 100...112

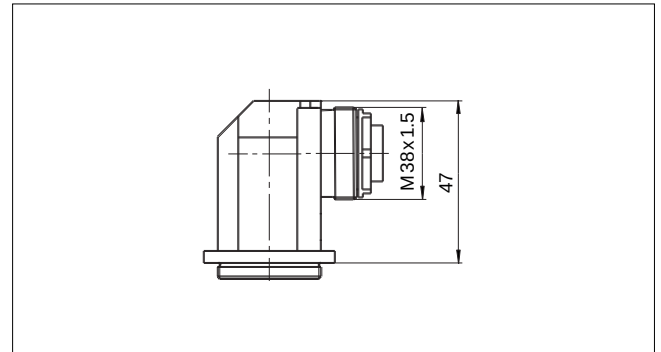


Fan plug

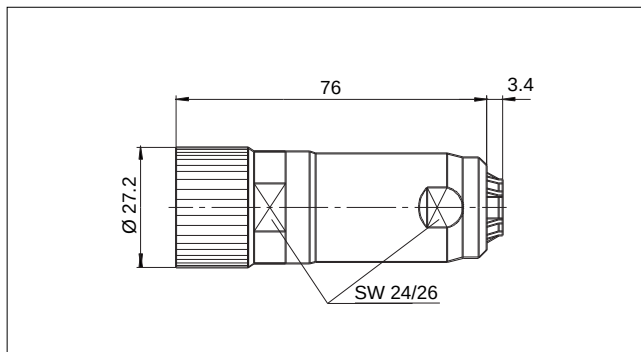


Right-angle socket fan

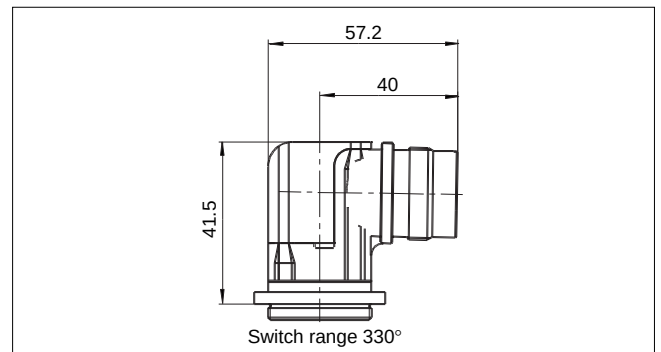


Encoder plug (resolver / Sin-Cos / incremental encoder)

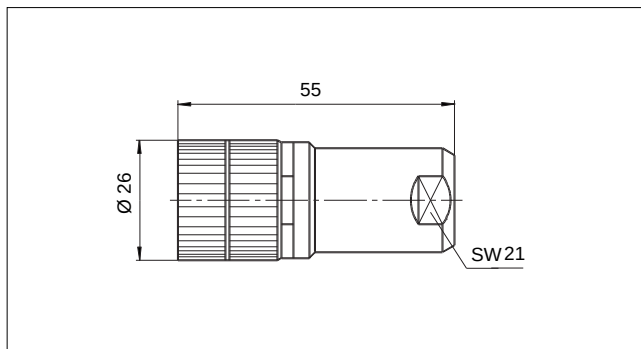

Right-angle socket encoder

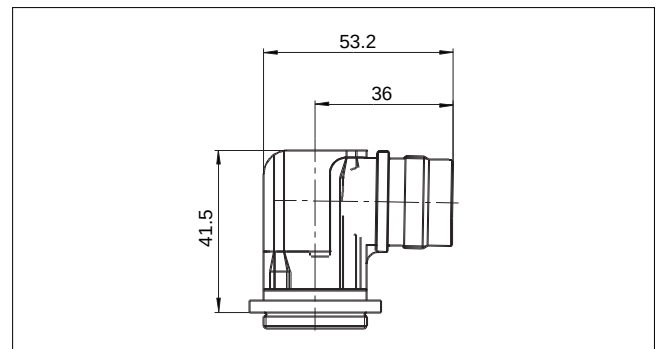



Technical data

Motor connection

Terminal box

As alternative to plug-in connectors, servo motors MDXK can be equipped with terminal boxes for power connection and brake.


The power connection of servo motors MDFQA (enclosed ventilated) is always equipped with a terminal box.

a) Motor MDXK

Connections

	Pin no.	Terminal designation
Brake	5	Y1
Brake	6	Y2
Protective earth	PE	PE
Motor phase	1	U
Motor phase	2	V
Motor phase	3	W

Terminals

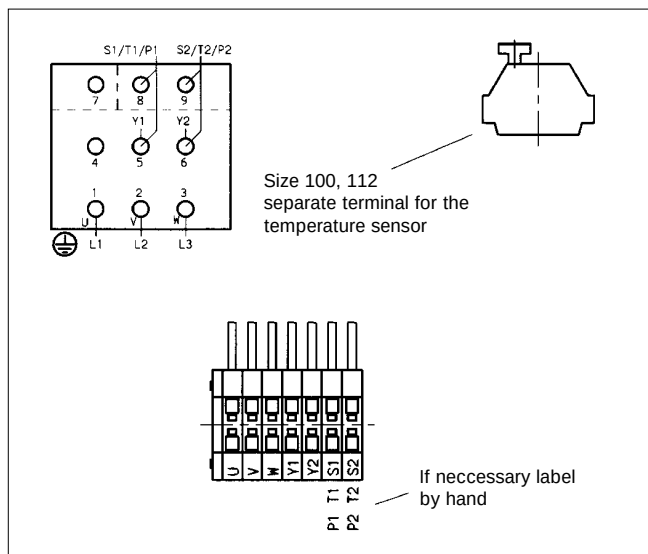



b) Motor MDFQA


Connections

	Terminal designation
Protective earth	PE
Motor phase	U
Motor phase	V
Motor phase	W
Thermostat, connection T1 with 9300	S1
Thermostat, connection T2 with 9300	S2
Temperature sensor*, KTY, con. through encoder	T1
Temperature sensor*, KTY, con. through encoder	T2

* Motors with feedback have the temperature sensor connected to the encoder plug.

Terminals

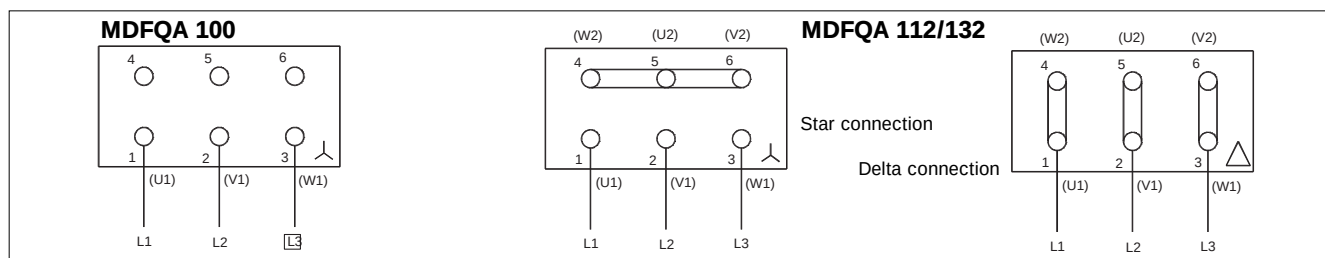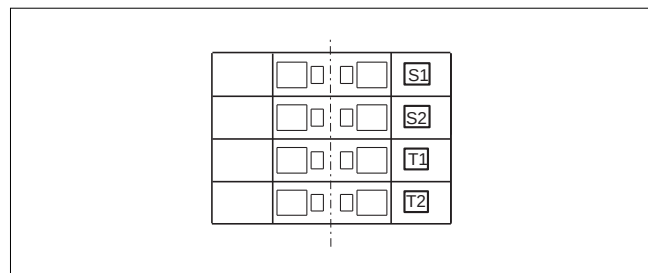



Feedbacks and fans can be connected to a second terminal box.


The feedback of servo motors MDFQA (enclosed ventilated) is always equipped with plug-in connectors.

Resolver as feedback

Connections

	Pin no.	Terminal designation
Temperature sensor	T1	+ KTY
Temperature sensor	T2	– KTY
Resolver	B1	+ Ref
Resolver	B2	– Ref
	B3	
Resolver	B4	+ cos
Resolver	B5	– cos
Resolver	B6	+ sin
Resolver	B7	– sin
	B8	
Separate fan	U1	L1
Separate fan	U2	N

Terminals

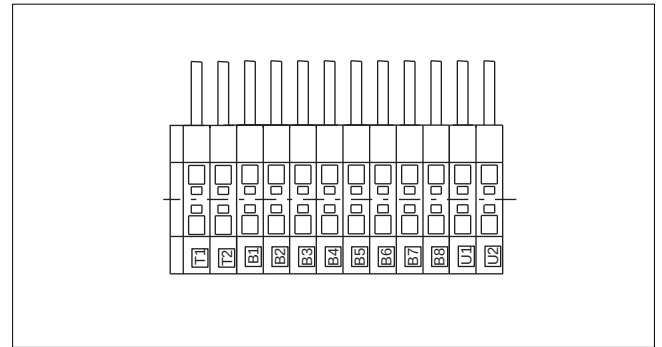


Incremental encoder of SinCos-encoder as feedback

Connections

	Pin no.	Terminal designation
Temperature sensor	T1	+ KTY
Temperature sensor	T2	– KTY
Incremental encoder supply +	B1	+ UB
Incremental encoder supply –	B2	± ov
Incremental encoder track A	B3	A
Incremental encoder track A invers	B4	– A
Incremental encoder track B	B5	B
Incremental encoder track B invers	B6	– B
Inc. encoder track C (zero track)	B7	N
Inc. encoder track C (zero track invers)	B8	N
Incremental encoder mass / sensor	B9	± ov
Incremental encoder screen	B10	Screen
Incremental encoder screen +	B11	+ U sensor
Separate fan	U1	L1
Separate fan	U2	N

Terminals

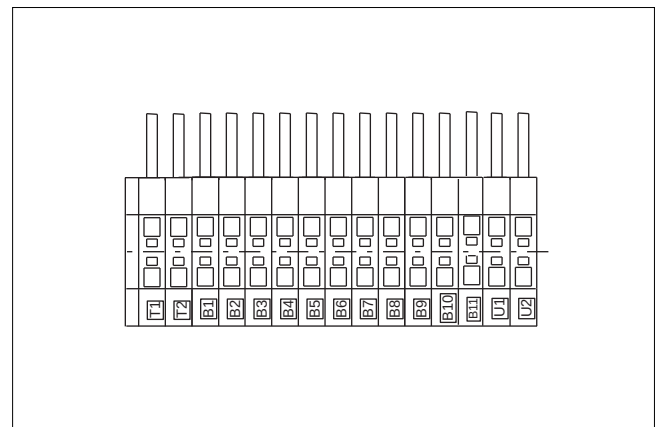


PG glands and bolts

Motor type	Power connection		Encoder / fan connection
	PG glands	Bolts	PG glands
MDSK 056	1xPG13.5 + 1xPG11	M4 bzw. 0.08...2.5 mm ²	1xPG13.5 + 1xPG11 + 3xPG7
MDXK 071	1xPG13.5 + 1xPG11	M4 bzw. 0.08...2.5 mm ²	1xPG13.5 + 1xPG11 + 3xPG7
MDXK 080	1xPG13.5 + 1xPG11	M4 bzw. 0.08...2.5 mm ²	1xPG13.5 + 1xPG11 + 3xPG7
MDSK 090	1xPG13.5 + 1xPG11	M4 bzw. 0.08...2.5 mm ²	1xPG13.5 + 1xPG11 + 3xPG7
MDXK 100	2x PG16	M5	2xPG16 + 3x PG7
MDXK 112	1xPG21 + 1xPG16	M5	2xPG16 + 3x PG7
	Power connection		Fan connection
MDFQ 100	2xPG29 + 1xPG9 *	M6	1xPG9
MDFQ 112	2xPG36 + 2xPG9 *	M8	1xPG9
MDFQ 132	4xPG29 + 2xPG9 *	M12	1xPG9


* For connection of parallel screened cables, e.g. 3 St 4 x 35 mm² or 4 St 4 x 25 mm²

Lenze

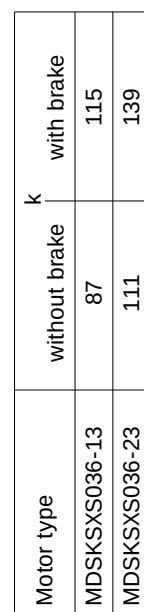



X-variable	Rotation of right-angle sockets possible
1	1
2	1
3	1
4	1
5	1
6	1
7	1
8	1
9	1
10	1
11	1
12	1
13	1
14	1
15	1
16	1
17	1
18	1
19	1
20	1
21	1
22	1
23	1
24	1
25	1
26	1
27	1
28	1
29	1
30	1
31	1
32	1
33	1
34	1
35	1
36	1
37	1
38	1
39	1
40	1
41	1
42	1
43	1
44	1
45	1
46	1
47	1
48	1
49	1
50	1
51	1
52	1
53	1
54	1
55	1
56	1
57	1
58	1
59	1
60	1
61	1
62	1
63	1
64	1
65	1
66	1
67	1
68	1
69	1
70	1
71	1
72	1
73	1
74	1
75	1
76	1
77	1
78	1
79	1
80	1
81	1
82	1
83	1
84	1
85	1
86	1
87	1
88	1
89	1
90	1
91	1
92	1
93	1
94	1
95	1
96	1
97	1
98	1
99	1
100	1






Synchronous servo motors MDXKS 071, mounting position B5/B14

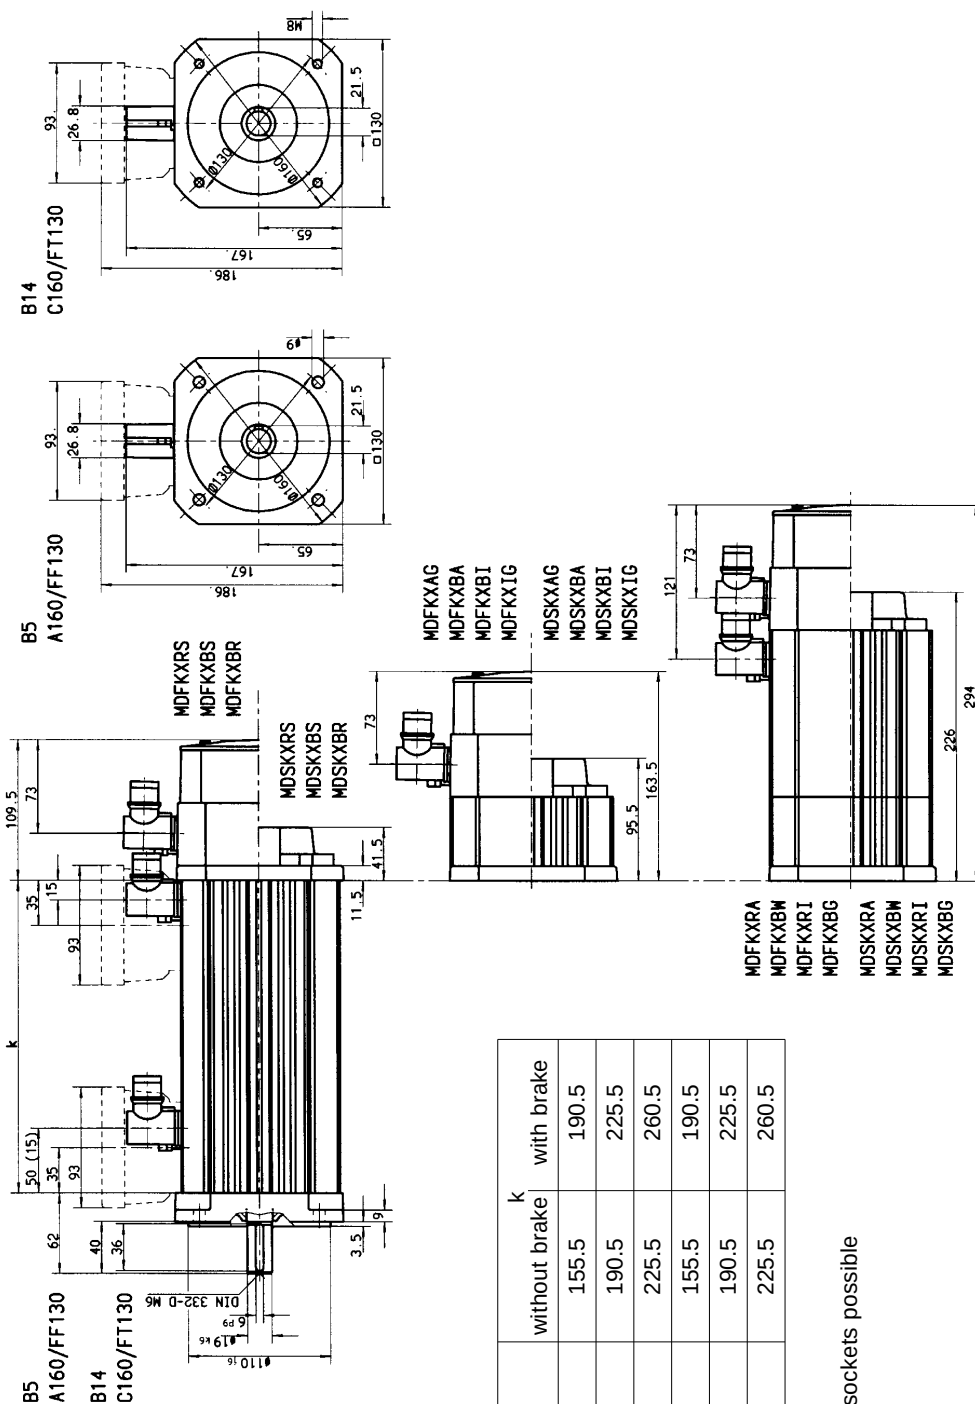




Dimensions

Asynchronous servo motors MDSKA 056, mounting position B5/B14

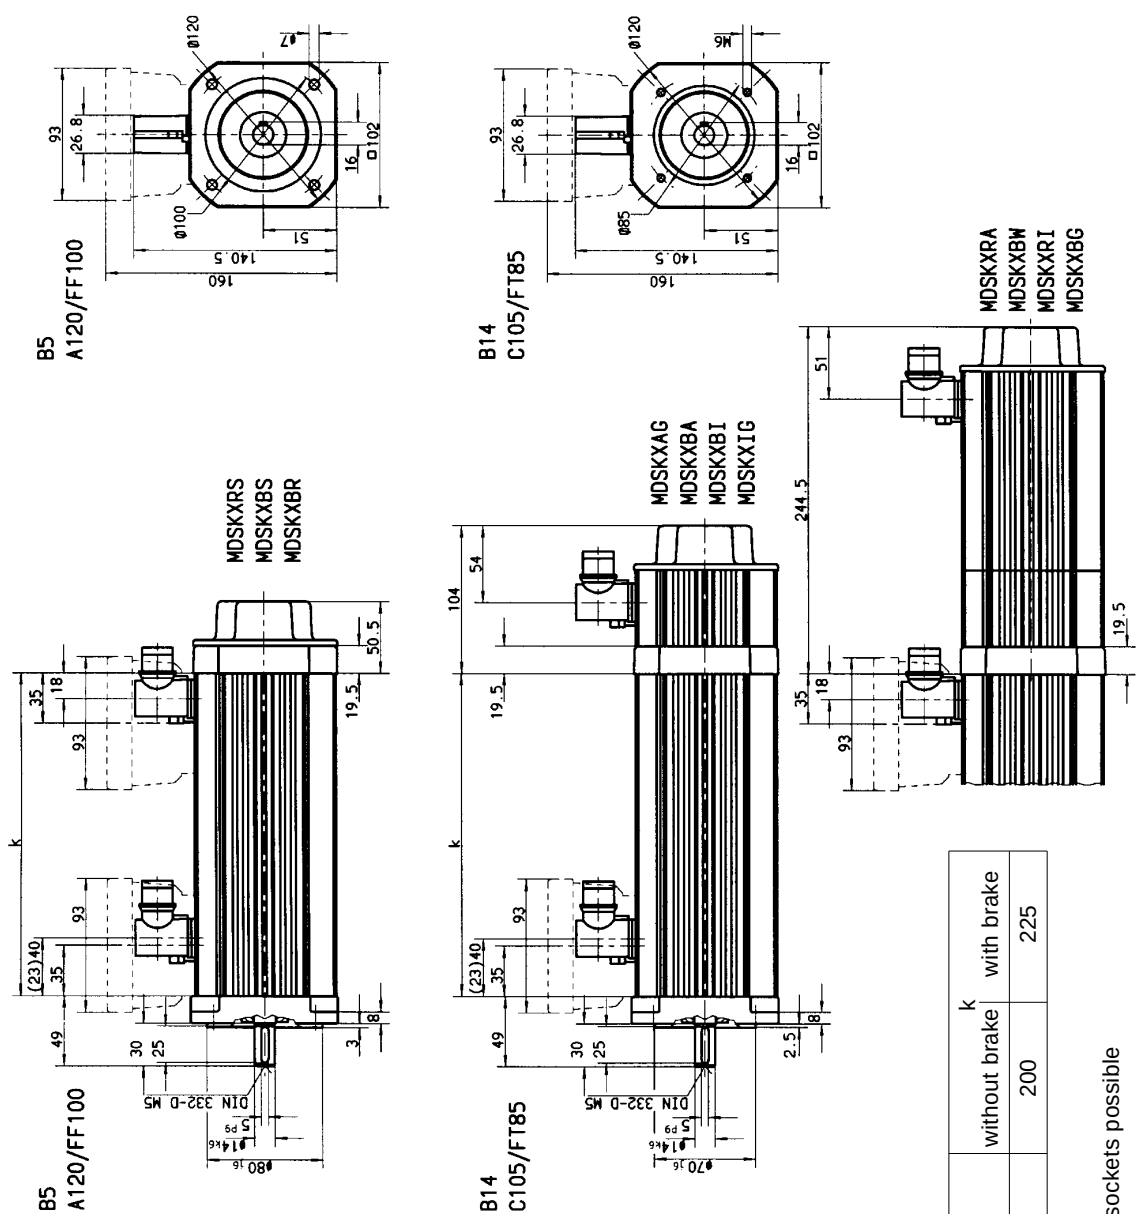


Motor type	without brake	with brake
MDSKAXX056-22, 140	200	225

() - without brake
X-variable
Rotation of right-angle sockets possible




Asynchronous servo motors MDXKS 071, mounting position B5/B14

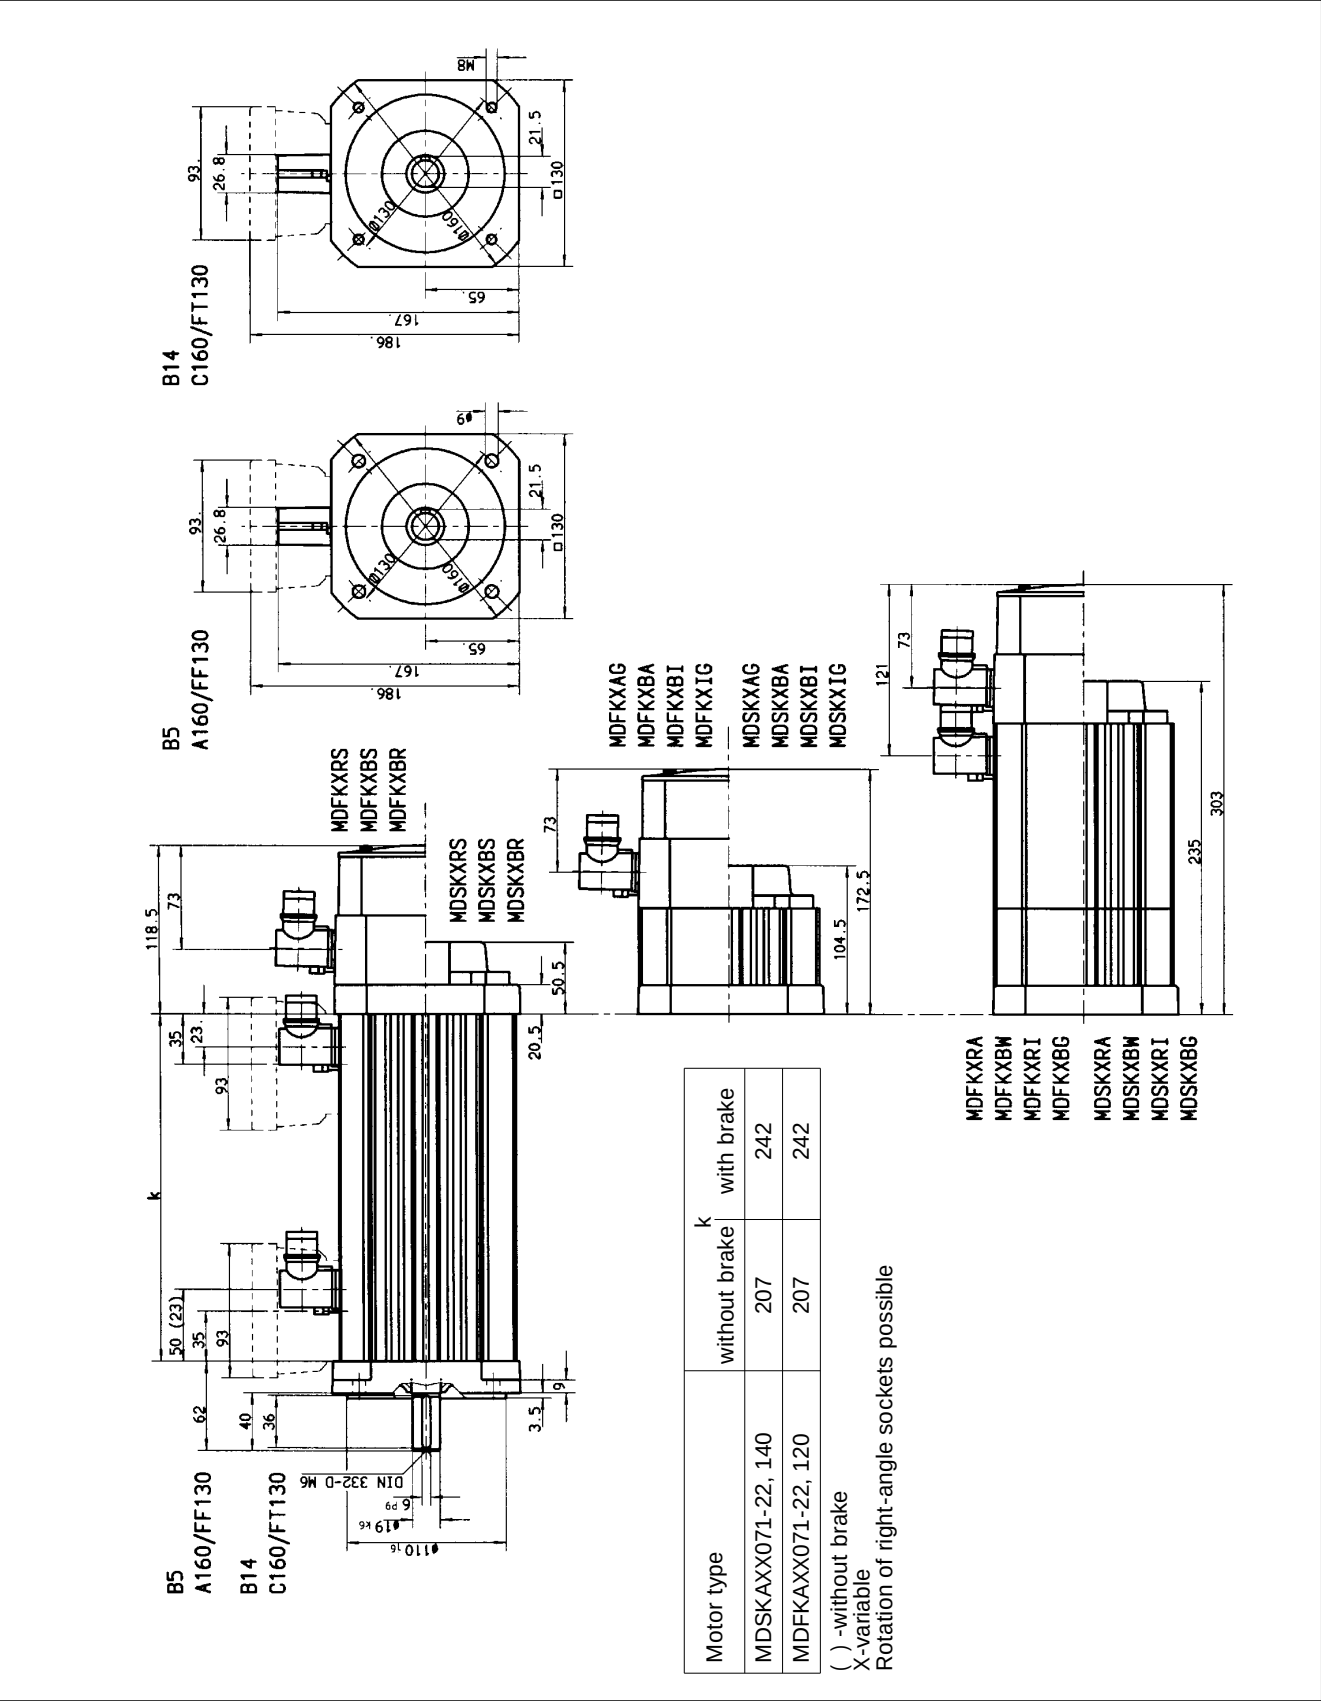





Lenze









Asynchronous servo motors MDXKA 112, mounting position B5/B14

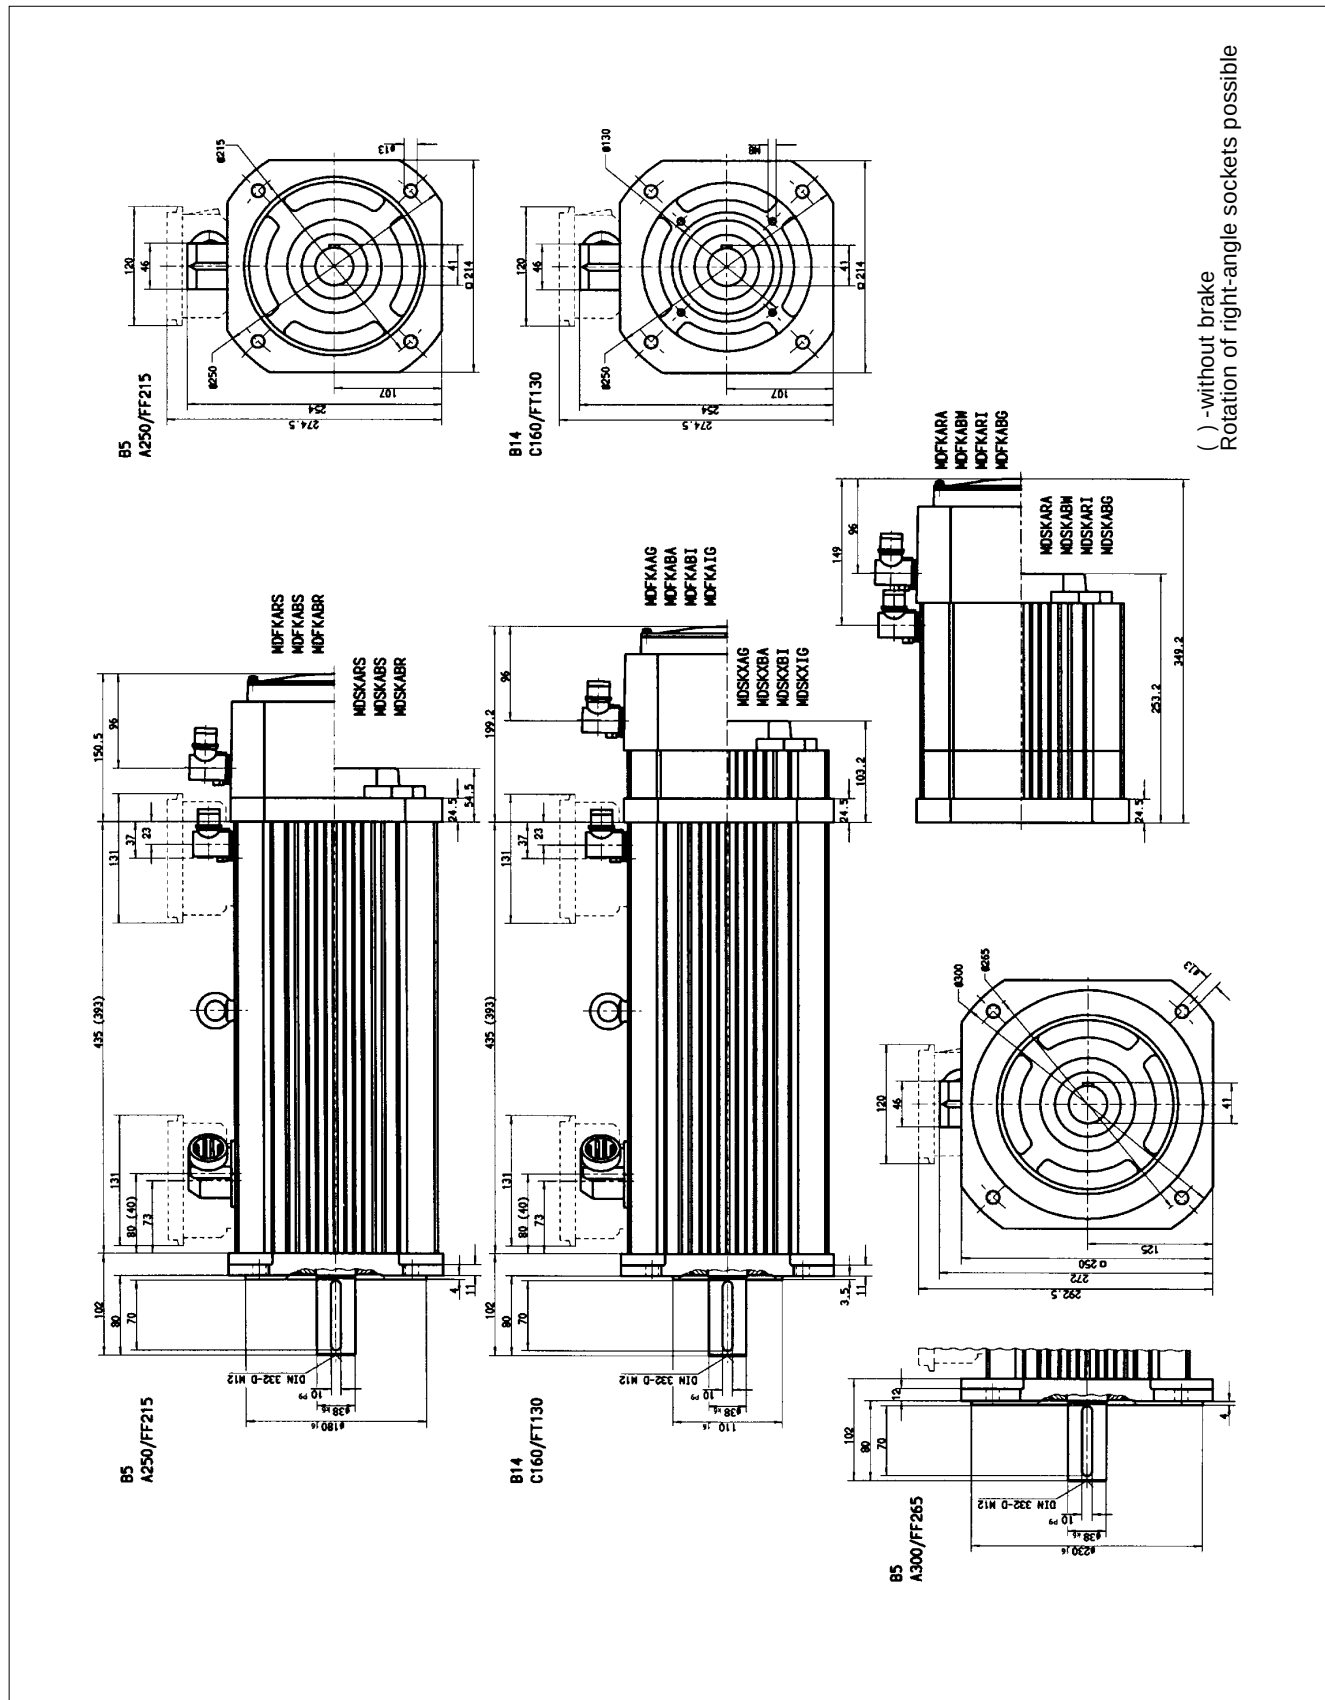



Dimensions

Asynchronous servo motors MDFQA 100...132, mounting position B5

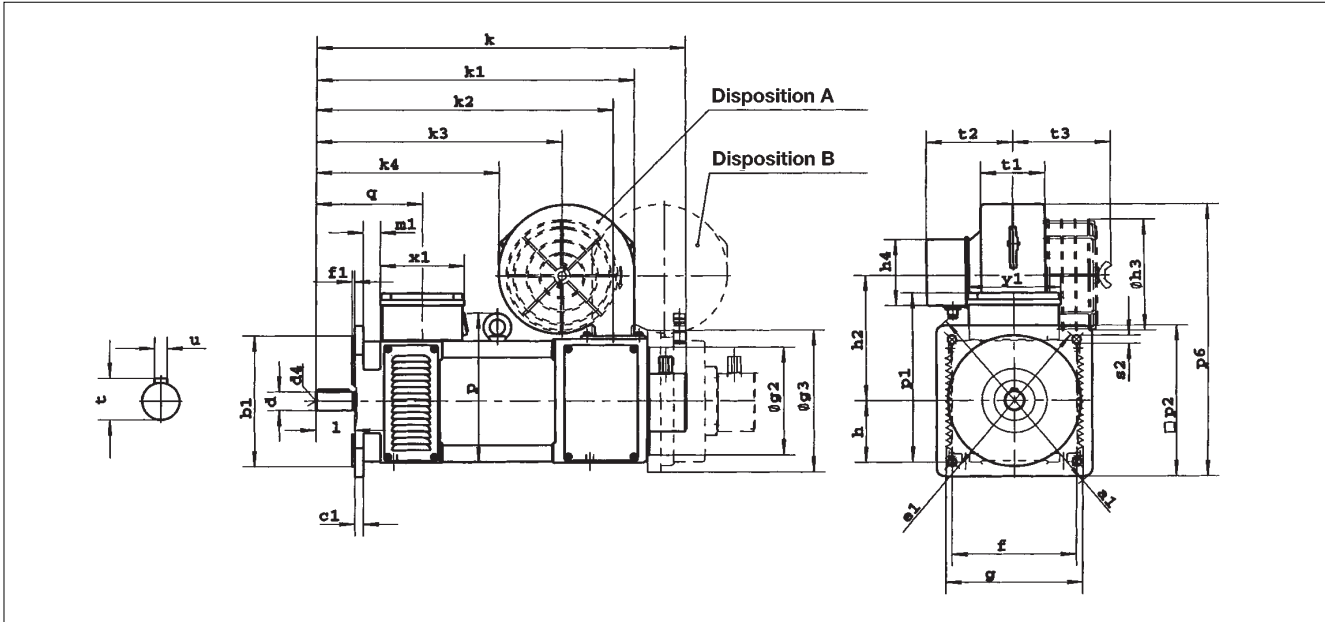

Motor type	Flange to DIN 42948	Flange to IEC 72	a1 P	b1 N	c HA	c1 LA	e1 M	f AB	f1 T	g AC	g2 -	h H	k2 -	m1 -	p -	p1 -	p2 -	q -
MDFQA 100-22	A300	FF265	300	230	14	12	265	196	4	212	163	100	452	25	243	282	220	181
MDFQA 132-32	A400	FF350	400	300	18	20	350	260	5	275	238	132	673	25	315	353	320	257

Motor type	s2 S	x1 -	y1 -	d D	l E	t GA	u F	d4 -	h2 -	h3 -	h4	k1 -	k3 -	k4 -	p6	t1 -	t2 -	t3 -	Separate fan
MDFQA 100-22	14	134	131	38	80	41	10	M12	180	-	94	480	386	304	385	82	111	124	G2D 120
	14	134	131	38	80	41	10	M12	214	185	94	489	348	240	447	100	97	142	G2D 140
	14	134	131	38	80	41	10	M12	204	187	110	487	367	275	421	52	158	64	DNG 3-4.5
MDFQA 132-32	18	261	160	55	110	59	16	M20	250	-	94	730	572	450	553	92	113	-	G2D 180
	18	261	160	55	110	59	16	M20	280	285	140	708	549	413	566	87	255	73	DNG 8-12

Dimensions k

Motor type	Encoder		
	without	Resolver	ITD 21
MDFQA 100-22	540	572	572
MDFQA 132-32	790	822	822


Dimensions k

Motor type	Brake 14.450					
	16	18	20	25	Resolver	ITD 21
MDFQA 100-22	666	666	-	-	696	696
MDFQA 132-32	-	-	901	901	933	933
MDFQA 100-132 *	214	243	278	330	-	-


* = Dimension g3 (outer brake diameter)

Terminal box at top (standard)
Shaft end fits to DIN 748T3

Key to DIN 6885, p. 1
Designations to DIN (a, b, c...), IEC (B, A, HA...)



Asynchronous servo motors MDFQA 100...132, mounting position B35

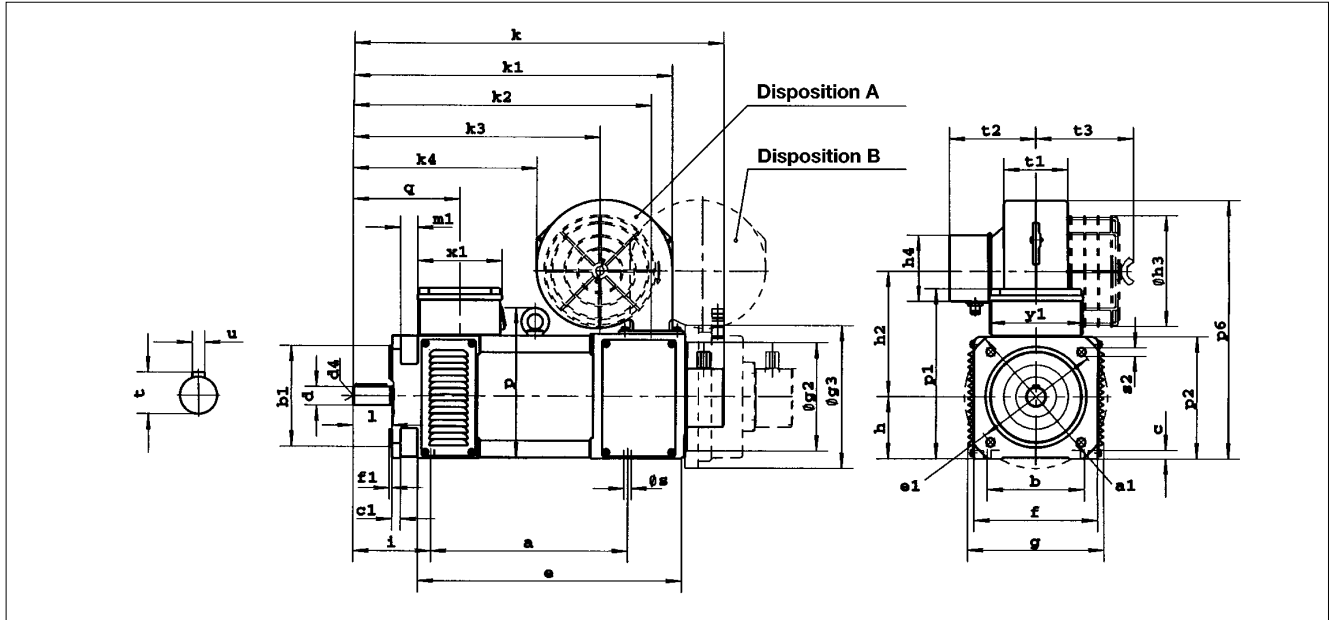

Motor type	Flange to DIN 42948	Flange to IEC 72	a B	a1 P	b A	b1 N	c HA	c1 LA	e BB	e1 M	f AB	f1 T	g AC	g2 -	h H	i -	k2 -	m1 -	p -	p1 -	p2 -
MDFQA 100-22	A250	FF215	295	250	160	180	14	12	382	215	196	4	212	163	100	143	452	25	243	270	198
MDFQA 112-22	A300	FF265	385	300	190	230	16	12	504	265	220	4	235	198	112	150	555	25	267	297	222
MDFQA 132-32	A300	FF265	460	300	215	230	18	12	604	265	260	4	275	238	132	199	673	25	315	353	262


Motor type	q -	s K	s2 S	x1 -	y1 -	d D	l E	t GA	u F	d4 -	h2 -	h3 -	h4 -	k1 -	k3 -	k4 -	p6 -	t1 -	t2 -	t3 -	Separate fan
MDFQA 100-22	181	12	14	134	131	38	80	41	10	M12	180	-	94	-	386	304	375	82	111	-	G2D 120
	181	12	14	134	131	38	80	41	10	M12	214	185	94	489	240	437	100	97	97	142	G2D 140 filter
	181	12	14	134	131	38	80	41	10	M12	204	187	110	487	367	275	411	52	158	64	DNG 3-4.5 wide range
MDFQA 112-22	168	12	14	157	155	38	80	41	10	M12	213	185	94	602	461	354	451	100	97	141	G2D 160
	168	12	14	157	155	38	80	41	10	M12	224	237	q123	590	430	322	466	87	234	96	DNG 5-12.5 Filter and wide range
MDFQA 132-32	257	15	18	261	160	55	110	59	16	M20	250	-	94	730	572	450	525	92	113	-	G2D 180
	257	15	18	261	160	55	110	59	16	M20	280	285	140	708	549	413	558	87	255	73	DNG 8-12 Filter and wide range

Dimensions k

Motor type	Encoder		
	without	Resolver	ITD 21
MDFQA 100-22	540	572	572
MDFQA 112-22	660	692	692
MDFQA 132-32	790	822	822

Motor type	Brake 14.450					
	16	18	20	25	Resolver	ITD 21
MDFQA 100-22	666	666	-	-	698	698
MDFQA 112-22	-	786	786	-	818	818
MDFQA 132-32	-	-	931	931	963	963
MDFQA 100-132 *	214	243	278	330	-	-

* = Dimension g3 (outer brake diameter)



Selection

Selection of a servo drive

Basic data

When installing a servo drive, normally a dynamic operation is required.

The essential data for the appropriate size of the motor are the following:

- Maximum torque M_{max} , Maximum speed n_{max} , efficient torque M_{eff} and if necessary transmission i

a) Transmission:
– for **perfect dynamic response**

b) – for a good use while continuous operation

$$i \approx \sqrt{\frac{J_{load}}{J_{motor}}}$$

$$i \approx \frac{n_{rated}}{n_{load}}$$

Efficient torque:

$$M_{rms} = \sqrt{\frac{1}{T} \sum_i M_i^2 t_i}$$

Maximum torque:

$$M_{max} = M_{accel} + \frac{1}{i} \frac{1}{\eta_{gearbox}} M_{load}$$

$$M_{accel} = 2 \cdot \pi \frac{\Delta n}{\Delta t} (J_{motor} + \frac{1}{i^2} J_{load})$$


Selection of the motor

After having detected the technical data one may choose between synchronous and asynchronous motors, on the one hand and, on the other hand, between self ventilated

and forced ventilated motors. The main characteristics of the different motor types are listed below:

Select motor according to $M_{rated} > M_{rms}$ and $n_{max} > n_{load}$ and take into consideration:

- | | | |
|--|---|---|
| – no stream of air allowed | → | Motor without fan MDSK |
| – fluffs or something similar, that might block the air channels | → | Motor without fan MDSK |
| – high enclosure required | → | Motor without fan MDSK |
| – high dynamic response required | → | Motor with fan MDFK, |
| | → | Synchr. servo motor MDXKS |
| – operation with constant power with high speed (operation with weak field) | → | Asynchr. servo motor MDXKA |
| – very high power density | → | Synchr. servo motor MDXKS |
| | → | enclosed ventilated asynchr. motors MDFQA |
| – parallel operation of servo mot. with one single inverter | → | Asynchr. servo motor MDXKA, MDFQA |



Selection of a servo drive

Operational mode: acceleration

Selecting the size of the drives according to the limit characteristics.

If you select the drive according to $n_{\max}$ and $M_{\max}$, the following has to be taken into account:

– Low noise

→ selection of 16 kHz chopp. fre.

– Check permanent current

→ especially with accelerating drive
($I_{\max} > 1.5 I_{\text{rated inverter}}$)

$$I_{\text{perm}} > I_{\text{medium}} \stackrel{!}{=} \frac{1}{T_i} \sum I_{\text{rated motor}} \cdot \frac{M_i}{M_{\text{rated}}} \cdot t_i$$

with synchr. motors


The mean is always below net value.

In the case of the continuous operation S6 and $M_{\text{efficient}} < M_{\text{rated}}$ the current medium value I_{medium} is smaller than the permanent current of the installation.

The following data are important for the operational mode acceleration drive:

Permanent current $\approx 0.7 \cdot I_{\text{rated inverter}}$

Maximum current $\approx 2 \cdot I_{\text{rated inverter}}$




9300

Selection

Possible combinations with controllers

Motor-inverter combination servo motor – servo inverter series 9300, 16 kHz chopper frequency


					Possible combinations and standard setting I _{max} = 1.5 I _n , maximum torque in Nm												Possible combinations and operational mode acceleration controller Maximum torque in Nm			
					Chopper frequency f _{chopp} f _{chopp} = 8 KHz												Chopper frequency f _{chopp} = 8 KHz			
Inverter type Continuous current [A] Maximum current [A]					9321 1.5 2.3	9322 2.5 3.8	9323 3.9 5.9	9324 7.0 10.5	9325 13 19.5	9326 23.5 35.25	9327 32 48	9328 47 70.5	9329 59 88.5	9330 89 133.5	9331 110 165	9332 145 217.5	9321 1.05 3	9322 1.7 5	9323 2.6 7.8	9324 4.7 14
Motor type	h [mm]	M _{rated} ³⁰⁰⁰ [Nm]	I _{rated} [A]	M _{rated} [Nm]																
Synchr. servo motors without fan																				
MDSKS 036-13, 200	35		0.9	0.6	1.5	2.2											1.9			
MDSKS 036-23, 200	35		1.1	1.3	2.7	4.3	5.6										3.5	5.0		
MDSKS 056-23, 190	51	2.9	2.3	2.8	2.8	4.6	7.0										3.7	6.0	9.2	
MDSKS 036-33, 200	51	4.3	3.6	4.2		4.4	6.9	11.7										5.8	9.0	15.2
MDSKS 071-03, 170	65	5.9	4.2	5.7			8.0	13.8	23.6										10.6	17.8
MDSKS 071-13, 185	65	8.8	7	8.3			7.0	12.5	22.3	35.2									9.2	16.6
MDSKS 071-33, 180	65	13	10	12.3				12.9	24.0	41.4										17.2
with separate fan																				
MDFKS 071-03, 165	65	7.7	5.6	7.5			8.0	13.8	23.5										10.6	17.8
MDFKS 071-13, 180	65	11.7	9.2	11.0				12.5	21.8	35.2										16.6
MDFKS 071-33, 175	65	17	13.1	16.2				12.9	24.0	41.4										17.2



Possible combinations with controllers

Motor-inverter combination servo motor – servo inverter series 9300, 8 kHz chopper frequency

								Possible combinations and maximum torque in Nm											
								Chopper frequency $f_{chopp} = 8 \text{ KHz}$											
		Inverter type						9321	9322	9323	9324	9325	9326	9327	9328	9329	9330	9331	9332
		Continuous current [A]						1.5	2.5	3.9	7.0	13	23.5	32	47	59	89	110	145
		Maximum current [A]						2.3	3.8	5.9	10.5	19.5	35.3	48	70.5	88.5	133.5	165	217.5
Motor type	h [mm]		M_{rated} [Nm]	P_{rated} [kW]	I_{rated} [A]	I_{max}^1 [A]	f_{rated} [Hz]												
Asynchronous servo motors surface cooled																			
without fan																			
MDSKA 056-22, 140	51		2.0	0.8	2.4		140		4.45	7.3	9.8								
MDSKA 071-22, 140	65		4.0	1.7	4.4		140				12.6	19.5							
MDSKA 080-22, 70	71		6.7	1.4	3.3		70			15.1	29.3								
MDSKA 080-22, 140	71		5.4	2.3	5.8		140				13.2	26.0							
MDSKA 090-22, 80	83		10.8	2.6	5.5		80				24.4	46.2							
MDSKA 090-22, 140	83		9.5	4.1	10.2		140					23.4	43.7	59.4					
MDSKA 100-22, 80	96		16.3	4.0	8.2		80				47.2	88.2							
MDSKA 100-22, 140	96		12.0	5.2	14.0		140				20.7	43.3	60.7						
MDSKA 112-22, 85	107		24.6	6.4	13.5		85				46.2	78.0	92.4						
MDSKA 112-22, 140	107		17.0	7.4	19.8		140					43.9	63.3	96.8	123.0				
with separate fan																			
MDFKA 071-22, 120	65		6.3	2.2	6.0		120				13.0	25.0							
MDFKA 080-22, 60	71		12.0	2.1	4.8		60				29.6	45.2							
MDFKA 080-22, 120	71		10.8	3.9	9.1		120					29.3	53.8						
MDFKA 090-22, 60	83		21.5	3.8	8.5		60					57.2	86.7						
MDFKA 090-22, 120	83		19.0	6.9	15.8		120						50.7	69.2	100.2				
MDFKA 100-22, 60	96		36.3	6.4	13.9		60					50.1	95.9	130.8					
MDFKA 100-22, 120	96		36.0	13.2	28.7		120						45.7	67.6	104.3	132.9	202.0		
MDFKA 112-22, 60	107		61.4	11.0	22.5		60						104.1	143.3	211.0	257.0			
MDFKA 112-22, 120	107		55.0	20.3	42.5		120								107.7	135.9	205.0	250.0	
Asynchronous servo motors. enclosed ventilated																			
MDFQA 100-22, 50	100	λ	71.3	10.6	26.5		50						109.3	156.7	232.0	253.0			
MDFQA 100-22, 100	100	λ	66.2	20.3	46.9		100								112.5	146.4	227.0	257.0	
MDFQA 112-22, 50	112	λ	145	11.5	27.2		28							247.0	339.0	346.0			
MDFQA 112-22, 50	112	Δ	135	20.1	43.7		50								230.1	292.9	341.8		
MDFQA 112-22, 100	112	λ	130	22.7	49.1		58								180.5	228.0	342.0	378.0	
MDFQA 112-22, 100	112	Δ	125	38.4	81.9		100										216.0	273.0	355.0
MDFQA 132-32, 36	132	λ	296	17.0	45.2		20								482.0	612.0	751.0		
MDFQA 132-32, 36	132	Δ	288	31.1	77.4		36										552.0	671.0	
MDFQA 132-32, 76	132	λ	282	35.4	88.8		42										424.0	512.0	663.0
MDFQA 132-32, 76	132	Δ	257	60.1	144.8		76											344.0	458.0




Selection

Possible combinations with controllers

Motor-inverter combination servo motor – servo inverter series 9300, 16 kHz chopper frequency (low noise)

				Possible combinations and standard setting I _{max} = 1.5 I _n Maximum torque in Nm							Possible combinations and controller for the operational mode acceleration Maximum torque in Nm Chopper frequency f _{chopp} = 16 KHz			
Inverter type Continuous current Maximum current				9321 1.1 2.7	9322 1.8 2.7	9323 2.9 4.4	9324 5.2 7.8	9325 9.7 14.6	9326 15.3 23	9327 20.8 31.2	9321 0.77 2.2	9322 1.26 3.6	9323 2.03 5.8	9324 3.64 10.4
Motor type	h [mm]	I _{rated} [A]	M _{rated} [Nm]											
Synchronous servo motors without fan														
MDSKS 036-13, 200	35	0.9	0.6	1.1	1.7	2.4					1.4	2.1		
MDSKS 036-23, 200	35	1.1	1.3	2.0	3.2	4.7					2.6	4.0	5.5	
MDSKS 056-23, 190	51	2.3	2.8	2.1	3.3	5.4	9.2				2.7	4.4	6.9	
MDSKS 036-33, 200	51	3.6	4.2			5.1	9.0	15.8					6.8	11.6
MDSKS 071-03, 170	65	4.2	5.7			6.0	10.6	18.5					7.9	13.7
MDSKS 071-13, 185	65	7	8.3				9.2	17.2	25.9	34.4				12.3
MDSKS 071-33, 180	65	10	12.3					18.0	27.9	36.9				
with separate fan														
MDFKS 071-03, 165	65	5.6	7.5				10.6	18.5						13.7
MDFKS 071-13, 180	65	9.2	11.0				9.2	17.2	25.9	34.4				12.3
MDFKS 071-33, 175	65	13.1	16.2					18.0	27.9	36.9				



Possible combinations with controllers

Motor-inverter combination servo motor – servo inverter series 9300, 16 kHz chopper frequency (low noise)

								Possible combinations and maximum torque in Nm											
								Chopper frequency $f_{chopp} = 16 \text{ KHz}$											
		Inverter type						9321	9322	9323	9324	9325	9326	9327	9328	9329	9330	9331	9332
		Continuous current [A]						1.1	1.8	2.9	5.2	9.7	15.3	20.8	30.6	38	58	70	90
		Maximum current [A]						1.7	2.7	4.4	7.8	14.6	23	31.2	45.9	57	87	105	135
Motor type	h [mm]		M_{rated} [Nm]	P_{rated} [kW]	I_{rated} [A]	f_{rated} [Hz]													
Asynchronous servo motors, surface cooled																			
without fan																			
MDSKA 056-22, 140	51		2.0	0.8	2.4	140			5.3	9.2									
MDSKA 071-22, 140	65		4.0	1.7	4.4	140				9.2	17.3								
MDSKA 080-22, 70	71		6.7	1.4	3.3	70				21.2	35.1								
MDSKA 080-22, 140	71		5.4	2.3	5.8	140				9.1	19.1	30.8							
MDSKA 090-22, 80	83		10.8	2.6	5.5	80				17.5	34.5	50.0							
MDSKA 090-22, 140	83		9.5	4.1	10.2	140					16.9	28.0	38.6	56.9					
MDSKA 100-22, 80	96		16.3	4.0	8.2	80					33.8	56.7	78.1						
MDSKA 100-22, 140	96		12.0	5.2	14.0	140						25.8	37.6	57.9					
MDSKA 112-22, 85	107		24.6	6.4	13.5	85						55.8	71.4	90.3	97.5				
MDSKA 112-22, 140	107		17.0	7.4	19.8	140							37.5	60.1	76.8	120.8			
with separate fan																			
MDFKA 071-22, 120	65		6.3	2.2	6.0	120					19.0	26.3							
MDFKA 080-22, 60	71		12.0	2.1	4.8	60				21.5	41.3								
MDFKA 080-22, 120	71		10.8	3.9	9.1	120					21.2	34.9	47.7						
MDFKA 090-22, 60	83		21.5	3.8	8.5	60					42.0	67.9	86.2						
MDFKA 090-22, 120	83		19.0	6.9	15.8	120							44.6	66.1	81.7				
MDFKA 100-22, 60	96		36.3	6.4	13.9	60						60.5	84.3	125.2	150.7				
MDFKA 100-22, 120	96		36.0	13.2	28.7	120								64.0	75.4	130.5	158.3		
MDFKA 112-22, 60	107		61.4	11.0	22.5	60							91.2	136.9	170.4	254.0			
MDFKA 112-22, 120	107		55.0	20.3	42.5	120										133.6	161.1	206.0	
Asynchronous servo motors, enclosed ventilated																			
MDFQA 100-22, 50	100	λ	71.3	10.6	26.5	50								149.0	189.2	250.0			
MDFQA 100-22, 100	100	λ	66.2	20.3	46.9	100										143.6	175.2	227.2	
MDFQA 112-22, 50	112	λ	145	11.5	27.2	28								236.0	292.0	346.0			
MDFQA 112-22, 50	112	Δ	135	20.1	43.7	50										288.5	314.3		
MDFQA 112-22, 100	112	λ	130	22.7	49.1	58										224.0	269.0	343.0	
MDFQA 112-22, 100	112	Δ	125	38.4	81.9	100											159.4	217.0	
MDFQA 132-32, 36	132	λ	296	17.0	45.2	20										605.0	681.0	753.0	
MDFQA 132-32, 36	132	Δ	288	31.1	77.4	36											440.0	556.0	
MDFQA 132-32, 76	132	λ	282	35.4	88.8	42												428.0	
MDFQA 132-32, 76	132	Δ	257	60.1	144.8	76													



Connection diagram



EC-Declaration – Low-voltage Directive (73/23/EEC)

EC-Declaration of Conformity '96

for the purpose of the EC Low-Voltage Directive (73/23/EEC)

amended by: CE- mark directive (93/68/EEC)

The following products were developed, designed, and manufactured in compliance with the above-mentioned EC directive under the sole responsibility of
Lenze GmbH & Co KG, Postfach 10 13 52, D-31763 Hameln

Lenze

Electronic drives

Lenze GmbH & Co KG
Postfach 10 13 52
D-31763 Hameln

Site: Groß Berkel
Hans-Lenze-Straße 1
D-31855 Aerzen
Telephone (05154) 82-0
Telefax (05154) 82-26 11

Product:

DC motors

Asynchronous motors

Servo motors

Three-phase AC winder motors

Type:

MGFRK, MGFQU, MGFQK
MGERK, MGEQU, MGEQK
MGSRK, MGSQU, MGSQK
13.12o , 13.53o , 13.55o
43.55o

13.71o , 13.74o , 13.75o
13.81o , 13.84o , 13.85o
DFRA, DERA, DSRA
43.71o , 43.75o

DFVA, DSVA, MDFQA
MDFKA, MDSKA
MDFKS, MDSKS

o oL12, o oF12
o oS8, o oS6
o oS4, o oF4
o oMF4, o oSF4
o oLF4

Standards:

EN 60204-1, IEC 204-1
EN 60034, VDE 0530, IEC34

Declaration about EMC directive (89/336/EEC)

Asynchronous motors comply with the requirements of the EC directive „Electromagnetic Compatibility“ 89/336/EEC under consideration of the standards EN 80081-1 and EN 50082-2 when connected to a sinusoidal AC mains voltage.

For inverter or DC-controller operation, the EMC notes of the manufacturers must be observed.

When using screened motor cables, the screening is most effective with a conductive connection with as large an area as possible between the screen and the earth potential of the motor (e.g. metal cable gland).

Hameln, February 20, 1996



(J. V. Pankow)
Head of R & D Department



Recipient: **Lenze**
Branch office/
subsidiary

Post code / city: _____

Fax: _____

Servo motors series MDXKA/MDXKS – preference types

Expedient

Company	_____	Customer No.	_____
Street / P.O. box	_____	Order No.	_____
Postal Code / City	_____	Issuer	_____
Delivery address*	_____	Phone	_____
	_____	Fax	_____
Invoice addressee*	_____	Date of delivery	_____
* Please fill out if not expedient	Date _____	Signature	_____

☐ MDSKAXX056-22 0.8 KW 3950 RPM 390 V 140 Hz	☐ MDSKAXX071-22 1.7 KW 4050 RPM 390 V 140 Hz	☐ MDSKAXX080-22 2.3 KW 4100 RPM 390 V 140 Hz	☐ MDSKAXX090-22 4.1 KW 4110 RPM 350 V 140 Hz
☐ MDSKAXX100-22 5.2 KW 4150 RPM 330 V 140 Hz	☐ MDSKAXX112-22 7.4 KW 4160 RPM 320 V 140 Hz	Self-ventilated motors	

☐ MDFKAXX071-22 2.2 KW 3410 RPM 390 V 120 Hz	☐ MDFKAXX080-22 3.9 KW 3455 RPM 390 V 120 Hz	☐ MDFKAXX090-22 6.9 KW 3480 RPM 390 V 120 Hz	☐ MDFKAXX100-22 13.2 KW 3510 RPM 390 V 120 Hz
☐ MDFKAXX112-22 20.3 KW 3520 RPM 390 V 120 Hz	Forced-ventilated motors		


☐ MDSKSXX036-13 0.25 KW 4000 RPM 245 V 200 Hz	☐ MDSKSXX036-23 0.54 KW 4000 RPM 345 V 200 Hz	☐ MDSKSXX056-23 1.1 KW 3800 RPM 330 V 190 Hz	☐ MDSKSXX056-33 1.8 KW 4000 RPM 325 V 200 Hz
☐ MDSKSXX071-03 2.0 KW 3900 RPM 330 V 170 Hz	☐ MDSKSXX071-13 3.2 KW 3700 RPM 325 V 185 Hz	☐ MDSKSXX071-33 4.6 KW 3600 RPM 325 V 180 Hz	Self-ventilated motors
☐ MDFKSXX071-03 2.6 KW 3300 RPM 320 V 165 Hz	☐ MDFKSXX071-13 4.1 KW 3600 RPM 325 V 180 Hz	☐ MDFKSXX071-33 5.9 KW 3500 RPM 325 V 175 Hz	Forced-ventilated motors

Motor power connect	☒ Plug
Mounting	☐ B5 FF75 Only size 36 ☐ B5A120 Only size 56 ☐ B5A160 Only size 71 ☐ B5A200 Only size 80/90 ☐ B5A250 Only size 100/112 ☐ B5A300 Only size 112
A-side	☒ without key
Temperature monitor	☒ KTY cont. temperature sensor
Enclosure	☒ IP54
Brake	☐ without brake ☐ with brake
Brake voltage (if selected)	☒ 24V DC
Encoder	☐ Resolver
Gearbox mounting	☒ without gearbox
Colour	☒ RAL 9005 black

One cross only for each range!

Price motor _____

DM



Order form

Recipient: **Lenze**
Branch office/
subsidiary

Postal Code / city: _____

Servo motors series MDFKS/MDSKS – industrial types

Fax: _____

Expedient

Company	_____	Customer No.	_____
Street / P.O. box	_____	Order No..	_____
Postal Code / City	_____	Issuer	_____
Delivery address*	_____	Phone	_____
	_____	Fax	_____
Invoice addressee*	_____	Date of delivery	_____
	_____	Signature	_____

* Please fill out if not expedient

Date _____

☐ MDSKSXX0056-23 1.1 KW 3800 RPM 330 V 190 Hz	☐ MDSKSXX0056-33 1.8 KW 4000 RPM 345 V 200 Hz	
☐ MDSKSXX071-03 2.0 KW 3900 RPM 330 V 170 Hz	☐ MDSKSXX071-13 3.2 KW 3700 RPM 325 V 185 Hz	☐ MDSKSXX071-33 4.6 KW 3600 RPM 325 V 180 Hz

Self-ventilated motors

☐ MDFKSXX071-03 2.6 KW 3300 RPM 320 V 165 Hz	☐ MDFKSXX071-13 4.1 KW 3600 RPM 325 V 180 Hz	☐ MDFKSXX071-33 5.9 KW 3500 RPM 325 V 175 Hz
---	---	---

Forced-ventilated motors

Motor power connect	☐ Plug	☐ Terminal box only for size 56 and 71 !
Mounting	☐ B5A120 only size 56	☐ B5A160 only size 71
	☐ B14C105 only size 56	☐ B14C160 only size 71
B9 drive size	☐ B9 - 1C only size 56	☐ B9 - 1D only size 71
A-side	☐ without key	☐ with key (not for B9 – direct mounting of gearbox!)
Temperature monitor	☐ KTY cont. temperature sensor	

Enclosure	☐ IP54	☐ IP65 only for self-cooled motors, size 56 and 71
-----------	-------------------------------	--

Brake	☐ without brake	☐ with brake
-------	--	-------------------------------------

Brake voltage (if selected)	☐ 24V DC	☐ 205V DC only for size 56 / 71!
-----------------------------	---------------------------------	--


Encoder	☐ Resolver	☐ SinCos-encoder Single Turn only for motor size 56 and 71!	☐ SinCos-encoder Multi Turn only for motor sizes 56 and 71!	☐ ITD21 TTL 2048 pulses / rev.
---------	-----------------------------------	--	--	--

Gearbox mounting	☐ without gearbox	☐ with "old" gearbox	☐ KKL-1- (right)	☐ KKL-2- (top)	☐ KKL-3- (left)	☐ KKL-4- (bottom)
		☐ with GNG gearbox	☐ KKL-5- (left)	☐ KKL-2- (top)	☐ KKL-3- (left)	☐ KKL-4- (bottom)

Colour	☐ RAL 9005 black
--------	--

Preference drives are written in bold and are underlined
One cross only for each range!

Price motor + gearbox _____ DM



Recipient: **Lenze**
Branch office/
subsidiary

Postal Code / city: _____

Servo motors series MDFKA/MDSKA – industrial types

Fax: _____

Expedient

Company	_____	Customer No.	_____
Street / P.O. box	_____	Order No.	_____
Postal Code / City	_____	Issuer	_____
Delivery address*	_____	Phone	_____
	_____	Fax	_____
Invoice addressee*	_____	Date of delivery	_____
* Please fill out if not expedient	Date _____	Signature	_____

☐ MDSKAXX056-22 0.8 KW 3950 RPM 390 V 140 Hz	☐ MDSKAXX071-22 1.7 KW 4050 RPM 390 V 140 Hz	☐ MDSKAXX080-22 1.4 KW 2000 RPM 390 V 70 Hz	☐ MDSKAXX080-22 2.3 KW 4100 RPM 390 V 140 Hz
☐ MDSKAXX090-22 2.6 KW 2300 RPM 390 V 80 Hz	☐ MDSKAXX090-22 4.1 KW 4110 RPM 350 V 140 Hz	☐ MDSKAXX100-22 4.0 KW 2340 RPM 390 V 80 Hz	☐ MDSKAXX100-22 5.2 KW 4150 RPM 330 V 140 Hz
☐ MDSKAXX112-22 6.4 KW 2490 RPM 390 V 85 Hz	☐ MDSKAXX112-22 7.4 KW 4160 RPM 320 V 140 Hz	Self-cooled motors	


☐ MDFKAXX071-22 2.2 KW 3410 RPM 390 V 120 Hz	☐ MDFKAXX080-22 2.1 KW 1635 RPM 390 V 60 Hz	☐ MDFKAXX080-22 3.9 KW 3455 RPM 390 V 120 Hz	☐ MDFKAXX090-22 3.8 KW 1680 RPM 390 V 60 Hz
☐ MDFKAXX090-22 6.9 KW 3480 RPM 390 V 120 Hz	☐ MDFKAXX100-22 6.4 KW 1700 RPM 390 V 60 Hz	☐ MDFKAXX100-22 13.2 KW 3510 RPM 390 V 120 Hz	☐ MDFKAXX112-22 11.0 KW 1710 RPM 390 V 60 Hz
☐ MDFKAXX112-22 20.3 KW 3520 RPM 390 V 120 Hz	Forced-ventilated motors		

Motor power connect	☐ Plug	☐ Terminal box				
Mounting	☐ B5A120 Only size 36	☐ B5A160 Only size 71	☐ B5A200 Only size 80/90	☐ B5A250 Only size 100/112	☐ B5A300 Only size 112	
	☐ B14C105 Only size 56	☐ B14C160 Only size 71/80/90/100/112				
B9 drive size	☐ B9 - 1C Only size 56	☐ B9 - 1D Only size 71	☐ B9 - 1E Only size 80	☐ B9 - 1F Only size 90	☐ B9 - 1G Only size 100	☐ B9 - 1H Only size 112
A-side	☐ without key	☐ with key	(not for B9 – direct mounting of gearbox!)			
Temperature monitor	☐ KTY cont. temperature sensor					
Enclosure	☐ IP54	☐ IP65	only for self-cooled motors!			
Brake	☐ without brake	☐ with brake				
Brake voltage (if selected)	☐ 24V DC	☐ 205V DC				
Encoder	☐ Resolver	☐ SinCos-encoder Single-turn	☐ SinCos-encoder Multi-turn	☐ ITD21 TTL 2048 pulses/rev.		
Gearbox mounting	☐ without gearbox	☐ with "old" gearbox	☐ KKL-1- (right)	☐ KKL-2- (top)	☐ KKL-3- (left)	☐ KKL-4- (bottom)
		☐ with GNG gearbox	☐ KKL-5- (right)	☐ KKL-2- (top)	☐ KKL-3- (left)	☐ KKL-4- (bottom)
Colour	☐ RAL 9005 black					

Preference drives are written in bold and are underlined
One cross only for each range!

Price motor + gearbox _____

DM



Order form

Recipient: **Lenze**
Branch office/
subsidiary

Postal Code / city: _____

Servo motor **MDFQA – preference type**

Fax: _____

Expedient

Company	_____	Customer No.	_____
Street / P.O. box	_____	Order No.	_____
Postal Code / City	_____	Issuer	_____
Delivery address*	_____	Phone	_____
	_____	Fax	_____
Invoice addressee*	_____	Date of delivery	_____
	_____	Signature	_____

* Please fill out if not expedient

Date _____

☐ MDFQA xx 100-22
☐ 10.6 KW
1420 RPM
360 V
50 Hz

☐ 20.3 KW
2930 RPM
360 V
100 Hz

☐ MDFQA xx 112-22
☐ 20.1 / 11.5 KW
1425 / 760 RPM
360 V
50 / 28 HZ

☐ 38.4 / 22.7 KW
2935 / 1670 RPM
360V
100 / 58 HZ

☐ MDFQA xx 132-32
☐ 31.1 / 17.0 KW
1030 / 550 RPM
360 V
36 / 20 HZ

☐ 60.1 / 35.4 KW
2235 / 1200 RPM
340 / 360 V
76 / 42 HZ

Operation mode ☒ S1 continuous operation

Mounting	☐ B3/B5 Flange combination mountings MDFQA100 = A250	☐ B6/B5 MDFQA112 = A300	☐ B7/B5 MDFQA112 = A300	☐ B8/B5 MDFQA132 = A300	☐ V1/V5	☐ V3/V6
	☐ B5 Flange single mounting MDFQA100 = A300	☐ V1 MDFQA112 = A300	☐ V3 MDFQA132 = A400	B5 , V1 , V3 are not possible with size 112.		

A-side ☒ with key

B-side ☐ Motor for encoder mounting ☐ Motor for brake/encoder mounting

Temperature monitoring
☒ Thermal contact normally-closed + KTY contact sensor

Enclosure ☒ IP23s

Terminal box position
☒ -2- (on top) referring to B3 mounting
* Looking on motor drive-end

Brakes ☐ without brake ☐ 14.450. _____
☐ 24V DC ☐ 205V DC ☐ 230V AC incl rectifier

Encoder ☐ without encoder ☐ Resolver

only mounting device (all motors are suitable to munt A4 tachos (with hollow shaft))

External fan for :	380 ... 460 V		350 ... 540 V
	without filter	with filter	with filter

size 100	☐ G2D120	☐ G2D140	
size 112	☐ G2D160	☐ G2D160	
size 132	☐ G2D180		☐ DNG 8 -12

Fan position ☐ -2- on top ☐ -1- right side ☐ -3- left side ☐ -4- bottom (only for gearbox mounting) ☐ without fan

Fan housing position
☐ front-sided ☐ back-sided

Gearbox attachment
☐ without gearbox ☐ with "old" gearbox ☐ KKL-1- (right) ☐ KKL-2- (top) ☐ KKL-3- (left) ☐ KKL-4- (bottom)
☐ with GnG gearbox ☐ KKL-5- (right) ☐ KKL-2- (top) ☐ KKL-3- (left) ☐ KKL-4- (bottom)


Colour ☐ RAL 9005 black ☐ RAL 6011 reseda green ☐ RAL 2000 yellow orange ☐ coated signal grey ☐ RAL 9018 papyrus white

2nd nameplate ☐ attached to termin

Preference types are written in bold and are underlined
One cross only for each range!

Price motor + gearbox _____

DM



Recipient: **Lenze**
Branch office/
subsidiary

Postal Code / city: _____

Fax _____

Servo motor MDFQA – industrial type

Expedient

Company _____	Customer No. _____
Street / P.O. box _____	Order No. _____
Postal Code / City _____	Issuer _____
Delivery address* _____	Phone _____
_____	Fax _____
Invoice addressee* _____	Date of delivery _____
* Please fill out if not expedient _____	Signature _____
Date _____	

☐ MDFQA xx 100-22
☐ 10.6 KW
1420 RPM
360 V
50 Hz

☐ 20.3 KW
2930 RPM
360 V
100 Hz

☐ MDFQA xx 112-22
☐ 20.1 / 11.5 KW
1425 / 760 RPM
360 V
50 / 28 HZ

☐ 38.4 / 22.7 KW
2935 / 1670 RPM
360V
100 / 58 HZ

☐ MDFQA xx 132-32
☐ 31.1 / 17.0 KW
1030 / 550 RPM
360 V
36 / 20 HZ

☐ 60.1 / 35.4 KW
2235 / 1200 RPM
340 / 360 V
76 / 42 HZ

Operation mode ☒ S1 continuous operation

Mounting ☐ B3/B5 ☐ B6/B5 ☐ B7/B5 ☐ B8/B5 ☐ V1/V5 ☐ V3/V6
Flange combination mountingsMDFQA100 = A250 MDFQA112 = A300 MDFQA132 = A300
☐ B5 ☐ V1 ☐ V3 B5 , V1 , V3 are not possible with size 112.
Flange single mountingMDFQA100 = A300 MDFQA132 = A400

A-side ☐ with key ☐ without key

B-side ☐ Motor for encoder mounting ☐ Motor for brake/encoder mounting

Temperature monitoring ☒ Thermal contact normally-closed + KTY contact sensor

Enclosure ☒ IP23s

Terminal box position ☒ -2- (on top) referring to B3 mounting
* Looking on motor drive-end

Brakes ☐ without brake ☐ 14.450. _____
☐ 24V DC ☐ 205V DC ☐ 230V AC incl rectifier

Encoder ☐ without encoder ☐ Resolver ☐ IDT21 TTL 4096 pulses ☐ IDT21 TTL 2048 pulses ☐ SinCos encoder Single turn ☐ SinCos encoder Multi turn

only mounting device (all motors are suitable to munt A4 tachos (with hollow))

	380 ... 460 V		350 ... 540 V	
External fan for :	without filter	with filter	without filter	with filter
size 100	☐ G2D120	☐ G2D140	☐ DNG 3 - 4.5	☐ DNG 3 - 4.5
size 112	☐ G2D160	☐ G2D160	☐ DNG 5 - 12.5	☐ DNG 5 - 12.5
size 132	☐ G2D180		☐ DNG 8 - 12	☐ DNG 8 - 12

Fan position ☐ -2- on top ☐ -1- right side ☐ -3- left side ☐ -4- bottom (only for gearbox mounting) ☐ without fan

Fan housing position ☐ front-sided ☐ back-sided

Gearbox attachment ☐ without gearbox ☐ with "old" gearbox ☐ KKL-1- (right) ☐ KKL-2- (top) ☐ KKL-3- (left) ☐ KKL-4- (bottom)
☐ with GnG gearbox ☐ KKL-5- (right) ☐ KKL-2- (top) ☐ KKL-3- (left) ☐ KKL-4- (bottom)

Colour ☐ RAL 9005 black ☐ RAL 6011 reseda green ☐ RAL 2000 yellow orange ☐ coated signal grey ☐ RAL 9018 papyrus white

2nd nameplate ☐ attached to termin

Preference types are written in bold and are underlined
One cross only for each range!

Price motor + gearbox _____

DM



Stammwerk Head office

Lenze GmbH & Co KG

Postfach 10 13 52
D-31763 Hameln
Telefon ++49 (0)5154 / 82-0
Telefax ++49 (0)5154 / 82-28 00
E-Mail: Lenze@Lenze.de

Kundendienst / Service

Mechanical Drives

Extental Bösingfeld
Breslauer Straße 3
D-32699 Extental
Telefon ++49 (0)5154 / 82-16 26
Telefax ++49 (0)5154 / 82-13 96

Electronic Drives

Extental Bösingfeld
Breslauer Straße 3
D-32699 Extental
Hotline Service: ++49 (0)180 5 20 24 26
Telefon ++49 (0)5154 / 82-11 11
Telefax ++49 (0)5154 / 82-11 12

Lenze GmbH & Co KG Anlagenbau

Buchenweg 1
D-31855 Aerzen
Telefon ++49 (0)5154 / 82-0
Telefax ++49 (0)5154 / 82-21 00

Lenze GmbH & Co KG Kleinantriebe

Hans-Lenze-Straße 1
D-32699 Extental
Telefon ++49 (0)5154 / 82-0
Telefax ++49 (0)5154 / 82-14 85

Lenze GmbH & Co KG Südtechnik

Verbindungstechnik
Schänzle 8
D-71332 Waiblingen
Telefon ++49 (0) 71 51 / 9 52 10
Telefax ++49 (0) 71 51 / 1 85 86

Deutschland Germany

Werksniederlassung Nord

Lenze GmbH & Co KG Vertrieb
Dornenpark 1, 31840 Hessisch Oldendorf
Telefon (0 51 52) 90 36-0
Telefax (0 51 52) 90 36-33/44/55

Vertriebsbüros:

Barsbüttel
Telefon (0 40) 67 56 11 00
Telefax (0 40) 67 56 11 01

Berlin
Telefon (0 33 04) 3 11 23
Telefax (0 33 04) 3 16 82

Berlin
Telefon (0 30) 56 40 03 91
Telefax (0 30) 56 40 03 92

Bielefeld
Telefon (0 5 21) 8 75 23 94
Telefax (0 5 21) 8 75 27 20

Bielefeld
Telefon (0 5 21) 98 68 54
Telefax (0 5 21) 98 68 55

Bielefeld / Key-Account-Vertrieb
Telefon (0 51 52) 90 36-0
Telefax (0 51 52) 90 36-44

Bremen
Telefon (0 4 21) 42 12 21
Telefax (0 4 21) 42 12 51

Hameln
Telefon (0 51 54) 9 61 32
Telefax (0 51 54) 9 65 40

Hannover
Telefon (0 51 02) 91 45 54
Telefax (0 51 02) 91 45 55

Magdeburg
Telefon (0 3 91) 6 31 33 73
Telefax (0 3 91) 6 31 63 61

Norderstedt
Telefon (0 40) 52 68 21 23
Telefax (0 40) 52 68 21 25

Osnabrück
Telefon (0 57 23) 9 40 1-0
Telefax (0 57 23) 9 40 1 44

Osnabrück / Key-Account-Vertrieb
Telefon (0 51 52) 90 36-0
Telefax (0 51 52) 90 36-44

Service:

Osnabrück
Telefon (0 54 02) 9 61 24
Telefax (0 54 02) 9 61 25

Verbindungstechnik:

Telefon (0 51 52) 90 36-0
Telefax (0 51 52) 90 36-44

Werksniederlassung West

Lenze GmbH & Co KG Vertrieb
Postfach 10 12 20
47497 Neukirchen-Vluyn
Kelvinstraße 7
47506 Neukirchen-Vluyn
Telefon (0 28 45) 95 93-0
Telefax (0 28 45) 95 93 93

Vertriebsbüros:

Aachen / Düren / Erft-Kreis
Telefon (02 02) 2 70 12 50
Telefax (02 02) 2 70 12 51

Düsseldorf / Krefeld
Telefon (0 28 45) 95 93-0
Telefax (0 28 45) 95 93 93

Dortmund / Bochum / Märk. Kreis
Telefon (0 23 89) 60 46
Telefax (0 23 89) 60 47

Essen / Mettmann
Telefon (0 28 45) 95 93-14
Telefax (0 28 45) 95 93 93

Kleve / Key-Account-Vertrieb
Telefon (0 28 31) 9 41 06
Telefax (0 28 31) 9 41 07

Kempen / Key-Account-Vertrieb
Telefon (0 21 52) 96 76 21
Telefax (0 21 52) 96 76 22

Köln / Bonn / Rhein.-Berg.-Kreis
Telefon (0 22 43) 91 25 36
Telefax (0 22 43) 91 25 37

Mönchengladbach
Telefon (0 28 45) 95 93-0
Telefax (0 28 45) 95 93 93

Recklinghausen / Borken / Coesfeld
Telefon (0 23 62) 9 80 11
Telefax (0 23 62) 9 80 12

Wuppertal / Ennepe-Ruhr-Kreis /
Oberberg.-Kreis
Telefon (0 23 39) 91 29 40
Telefax (0 23 39) 91 29 41

Service:

Neukirchen-Vluyn
Telefon (0 28 45) 95 93-0
Telefax (0 28 45) 95 93 93

Neukirchen-Vluyn
Telefon (0 28 45) 95 93-17
Telefax (0 28 45) 95 93 93

Verbindungstechnik:

Telefon (0 24 21) 50 30 42
Telefax (0 24 21) 95 17 31

Werksniederlassung Mitte

Lenze GmbH & Co KG Vertrieb
Postfach 14 63, 35724 Herborn
Westerwaldstraße 36, 35745 Herborn
Telefon (0 27 72) 95 94-0
Telefax (0 27 72) 5 30 79

Vertriebsbüros:

Darmstadt
Telefon (0 62 53) 93 21 17
Telefax (0 62 53) 93 21 18

Frankfurt
Telefon (0 27 79) 9 10 20
Telefax (0 27 79) 9 10 22

Herborn
Telefon (0 27 72) 95 94-19
Telefax (0 27 72) 5 30 79

Karlsruhe
Telefon (0 72 46) 94 20 30
Telefax (0 72 46) 94 20 31

Kassel
Telefon (0 56 65) 92 10 14
Telefax (0 56 65) 92 10 15

Koblenz
Telefon (0 27 79) 9 10 61
Telefax (0 27 79) 9 10 63

Koblenz / Key-Account-Vertrieb
Telefon (0 26 63) 96 90 91
Telefax (0 26 63) 96 90 92

Landau
Telefon (0 63 45) 91 90 30
Telefax (0 63 45) 91 90 31

Neunkirchen
Telefon (0 68 21) 14 00 94
Telefax (0 68 21) 14 00 95

Service:

Herborn
Telefon (0 27 72) 95 94 21
Telefax (0 27 72) 5 30 79

Sinsheim
Telefon (0 72 61) 91 30 50
Telefax (0 72 61) 91 30 51

Verbindungstechnik:

Telefon (0 66 82) 1 00 43
Telefax (0 66 82) 14 08

Werksniederlassung Südwest

Lenze GmbH & Co KG Vertrieb
Postfach 14 33, 71304 Waiblingen
Schänzle 8
71332 Waiblingen
Telefon (0 71 51) 9 59 81 - 0
Telefax (0 71 51) 9 59 81 50

Vertriebsbüros:

Backnang
Telefon (0 71 91) 97 05 70
Telefax (0 71 91) 97 05 80

Esslingen
Telefon (0 71 51) 9 59 81-17
Telefax (0 71 51) 9 59 81 50

Leonberg
Telefon (0 71 52) 99 79 20
Telefax (0 71 52) 99 79 21

Reutlingen
Telefon (0 71 51) 9 30 12
Telefax (0 71 51) 9 30 13

Rottweil
Telefon (0 74 28) 9 10 76
Telefax (0 74 28) 9 10 77

Kappel / Key-Account-Vertrieb
Telefon (0 78 22) 89 52 72
Telefax (0 78 22) 89 52 73

Singen
Telefon (0 77 31) 94 70 17
Telefax (0 77 31) 94 70 18

Südbaden
Telefon (0 76 65) 91 20 44
Telefax (0 76 65) 91 20 45

Südbaden
Telefon (0 71 51) 9 30 90
Telefax (0 71 51) 9 30 91

Service:

Waiblingen
Telefon (0 71 51) 9 59 81 15
(0 71 51) 9 59 81 21

Telefax (0 71 51) 9 59 81 50

Werksniederlassung Süd

Lenze GmbH & Co KG Vertrieb
Fraunhoferstraße 16
82152 Martinsried
Postfach 11 26
82141 Planegg
Telefon (0 89) 89 56 14-0
Telefax (0 89) 89 56 14 14

Vertriebsbüros:

Allgäu / Key-Account-Vertrieb
Telefon (0 8 21) 24 30 43
Telefax (0 8 21) 24 30 44

Ansbach
Telefon (0 98 03) 9 40 11
Telefax (0 98 03) 9 40 12

Augsburg / Key-Account-Vertrieb
Telefon (0 8 21) 2 62 00 21
Telefax (0 8 21) 2 62 00 22

München
Telefon (0 89) 32 14 98 40
Telefax (0 89) 32 14 98 41

Oberfranken
Telefon (0 91 26) 28 66 33
Telefax (0 91 26) 28 66 34

Rosenheim
Telefon (0 80 65) 91 22
Telefax (0 80 65) 91 23

Unterfranken
Telefon (0 93 67) 9 91 11
Telefax (0 93 67) 9 91 12

Service:

München
Telefon (0 86 31) 37 96 15
Telefax (0 86 31) 37 96 16

Nürnberg
Telefon (0 91 11) 4 62 50 80
Telefax (0 91 11) 4 62 50 81

Werksniederlassung Ost

Lenze GmbH & Co KG Vertrieb
Grimmaische Straße 78
04720 Döbeln
Telefon (0 34 31) 66 06-0
Telefax (0 34 31) 66 06 66

Vertriebsbüros:

Sömmerda
Telefon (0 36 34) 60 18 09
Telefax (0 36 34) 60 18 60

Döbeln
Telefon (0 34 31) 66 06 13
Telefax (0 34 31) 66 06 66

Service:

Döbeln
Telefon (0 34 31) 66 06 14
Telefax (0 34 31) 66 06 66



weltweit worldwide

Argentina

E.R.H.S.A.
Girardot 1368
1427 Buenos Aires
Argentina
Phone ++54 (0)1 / 55 43 23 2
Telefax ++54 (0)1 / 55 23 61 1

Australia

FCR Motion Technology Pty. Ltd.
Automation Place
23 McArthur's Road
P.O. Box 359
Altona North
3025 Melbourne
Australia
Phone ++61 (0)3 / 93 99 15 11
Telefax ++61 (0)3 / 93 99 14 31

Austria

Lenze Antriebstechnik Ges.m.b.H.
Postfach 21
Mühlenstraße 3
A-4470 Enns
Phone ++43 (0)7223 / 88 6-0
Telefax ++43 (0)7223 / 88 66 6

Büro Vorarlberg:
Wiesenweg 1
A-6960 Wolfurt
Phone ++43 (0)5574 / 67 89-0
Telefax ++43 (0)5574 / 67 89 66

Büro Wien:
Triester Straße 14/109
A-2351 Wr. Neudorf
Phone ++43 (0)2236 / 2 53 33-0
Telefax ++43 (0)2236 / 2 53 33-66

Belgium

Lenze b.v.b.a
Noorderlaan 133, bus 15
B-2030 Antwerpen
Phone ++32 (0)3 / 54 26 20 0
Telefax ++32 (0)3 / 54 13 75 4

Bosnia-Herzegovina

see Austria

Brazil

IMETEX Comércio e Participações Ltda.
Rua Alexandre Dumas 001213
CEP 04717-902
Chácara St. Antonio - Santo Amaro - SP
Brazil
Phone ++55 (0)11 / 51 82-79 11
Telefax ++55 (0)11 / 51 81-17 77

Bulgaria

see Macedonia

Canada

see USA

Chile

Sargent S.A.
Tecnica Thomas C. Sargent
S.A.C.é.l., Casilla 166-D
Santiago, Chile
Phone ++56 (0)2 / 69 91 52 5
Telefax ++56 (0)2 / 69 83 98 9

Aupi Ltda.
Automation y Proceso Industrial
Camino a Melipilla No. 262
Santiago, Chile
Phone ++56 (0)2 / 81 11 80 4
Telefax ++56 (0)2 / 81 11 10 2

China

Lenze GmbH & Co KG
Beijing Representative Office
Rm. 401, Huaxin Mansion
No. 33, An Ding Road
Chaoyang District
Beijing 100029
China
Phone ++86-10-6441 1470/71/72/73
Telefax ++86-10-6441 1467

Croatia

see Austria

Czech Republic

Lenze Antriebstechnik GmbH
informační a poradenské středisko
17. listopadu 510
CZ-549 41 Červený Kostelec
Phone ++420 (0)441 / 467-111
Telefax ++420 (0)441 / 467-166

Denmark

Leomotor A/S
Ingenior- & Handelsfirma
Stubmøllevvej 35-37, Postbox 438
DK-2450 København SV
Phone ++45 / 36 30 66 66
Telefax ++45 / 36 30 64 33

Büro Jylland:
Leomotor A/S
Enebærvej 11, DK-8653 Them
Phone ++45 / 86 84 75 33
Telefax ++45 / 86 84 83 53

Egypt

AL-FARID
Mohamed Farid Hassanen & Co
1349 Kornish El Nile
Cairo - El Sahel, Egypt
Phone ++20 (0)2 / 20 56 26-7/8/9/0
Telefax ++20 (0)2 / 20 56 27 1

Estland

see Finland

Finland

Refimex Drives Oy
P.O. Box 35
FIN-02271 Espoo
Hannuksentie 1
FIN-02270 Espoo
Phone ++358 (0)9 / 80 48 61
Telefax ++358 (0)9 / 88 40 94 1

France

Lenze S.A.
Z.A. de Chanteloup
Rue Albert Einstein
F-93603 Aulnay s/s Bois Cedex
Phone ++33 (0)1 / 48 79 62 00
Telefax ++33 (0)1 / 48 69 40 99

Succ. Rhône-Alpes:
42, Chemin des Pivoles
F-69150 Décines-Charpieu
Phone ++33 (0)4 / 72 15 40 20
Telefax ++33 (0)4 / 78 26 88 36

Agence Sud-Ouest:
14, rue Capus
F-31400 Toulouse
Phone ++33 (0)5 / 61 14 85 37
Telefax ++33 (0)5 / 61 14 85 38

Agence Est:
2, rue des Tulipes
F-67870 Griesheim-pres-Moisheim
Phone ++33 (0)3 / 88 38 09 20
Telefax ++33 (0)3 / 88 38 17 24

Greece

Georg P. Alexandris AG
K. Mavromichali Str. 12
P.O. Box 86 009
GR-185.03 Piräus
Phone ++30 (0)1 / 41 11 84 1
Telefax ++30 (0)1 / 41 27 05 8

Georg P. Alexandris AG
Monastiriou Str. 153
GR-546.27 Thessaloniki
Phone ++30 (0)31 / 52 75 21 2
Telefax ++30 (0)31 / 51 18 15

Hungary

Lenze Antriebstechnik GmbH.
Szerviz és Információs Iroda
Bognár u. 3/B II.3
H-1021 Budapest
Phone ++36 (0)1 / 27 50 07 7
Telefax ++36 (0)1 / 39 45 49 6

Iceland

see Denmark

India

Emco Lenze Pvt. Ltd.
106 Sion Koliwada Road
Sion (East)
India-Mumbai 400 022
Phone ++91 (0)22 / 40 71 81 6 / 40 76 37 1
40 76 43 2 / 40 77 45 3
Telefax ++91 (0)22 / 40 90 42 3

Indonesia

P.T. Temasindo Division Lenze
Jl. Hariangbanga 5
Bandung 40116
Indonesia
Phone ++62 (0)22 / 43 00 35
Telefax ++62 (0)22 / 43 11 18

Kompl. Kota Grogol Permai / A-35
Jakarta 11460
Indonesia
Phone ++62 (0)21 / 56 79 63 1
56 79 63 2
Telefax ++62 (0)21 / 56 68 75 0

Iran

Tavan Ressan Co.,
P.O. Box 19395-5177
Ayatollah-Sadr Exp.Way,
South Dastour Ave., Habibi Str. No. 44
Tehran 19396, Iran
Phone ++98 (0)21 / 26 67 66 / 26 26 55
26 92 99
Telefax ++98 (0)21 / 20 02 88 3

Israel

Greenshpon Eng., Works Ltd.
20 Haamelim St., P.O. Box 10 108
Haifa-Bay 26110, Israel
Phone ++972 (0)4 / 87 21 18 7
Telefax ++972 (0)4 / 87 26 23 1

Italy

Gerit Trasmissioni S.p.A.
Viale Monza 338, I-20128 Milano
Phone ++39 (0)02 / 27 09 81
Telefax ++39 (0)02 / 27 09 82 92

Japan

Miki Pulley Co., Ltd.
461 Imai-Minami-Cho
Nakahara-Ku, Kawasaki-City, Kanagawa
Japan
Phone ++81 (0)44 / 733-4371
Telefax ++81 (0)44 / 711-3934

Luxembourg

see Belgium

Macedonia

Lenze Antriebstechnik GmbH
Protstavnistov Skopje
Nikola Ruskinski str. III/A/2
MAZ-91000 Skopje
Phone ++389 (0)91 / 39 00 90
Telefax ++389 (0)91 / 39 00 91

Malaysia

D.S.C. Engineering SDN. BHD.
40B, Jalan SS 21/58
Damansara Utama, 47400 Petaling Jaya
Selangor, Malaysia
Phone ++60 (0)3 / 718 6530
Telefax ++60 (0)3 / 719 5031

Mexico

see USA

Netherlands

Lenze B.V.
Postbus 31 01
5203 DC's-Hertogenbosch
Netherlands
Ploegweg 15
5232 BR's-Hertogenbosch
Netherlands
Phone ++31 (0)73 / 64 56 50 0
Telefax ++31 (0)73 / 64 56 51 0

New Zealand

Tranz Corporation
112 Mays Road, Onehunga
P.O. Box 12-320, Penrose
Auckland, New Zealand
Phone ++64 (0)9 / 63 45 51 1
Telefax ++64 (0)9 / 63 45 51 8

Norway

DTC-Lenze A/S
Elveveien 26-28, N-1472 Fjellhamar
Phone ++47 / 67 91 24 50
Telefax ++47 / 67 97 20 25

Philippines

Jupp & Company Inc.
Unit 2111, Cityland 10, Tower II
6817 Ayala Ave. Cor. H. V.
De La Costa St., Makati
Metro Manila, Philippines
Phone ++63 (0)2 / 89 43 89 8 / 89 21 50 6
Telefax ++63 (0)2 / 89 32 07 4

Poland

Rotiw Sp. z o.o.
ul. Rozdzińskiego 188b
40-203 Katowice, Poland
Phone ++48 (0)32 / 2 03 03 15
Telefax ++48 (0)32 / 75 72 73 4

Portugal

COSTA, LEAL E VICTOR, LDA
R. Augusto Lessa 269 - Apartado 2060
P-4201 Porto Codex
Phone ++351 (0)2 / 5 02 90 95
5 02 91 18
5 02 99 73
Telefax ++351 (0)2 / 5 02 40 05

Romania

see Austria

Russia

Inteldrive, Leningradskoye Shosse 58
Building 21, Floor 3, # 3
Moscow 125212, Russia
Phone ++7 095 / 459 97 65
Telefax ++7 095 / 452 47 45

Singapore

see Malaysia

Slovak Republic

see Czech Republic

Slovenia

Lenze pogonska tehnika GmbH
Podružnica Ljubljana, C.A. Bitenca 68
SLO-1000 Ljubljana
Phone ++386 61 / 15 026 15
Telefax ++386 61 / 15 026 10

South Africa

S.A. Power Services (Pty.) Ltd.
P.O. Box 11 37
ZA-Randburg 2125, South Africa
Phone ++27 (0)11 / 78 71 80 1
Telefax ++27 (0)11 / 78 75 04 0

South Korea

see China

Spain

Lenze Transmisiones, S.A.
Mila i Fontanals, 135-139
E-08205 Sabadell (Barcelona)
Phone ++34 93 / 71 22 26 3
Telefax ++34 93 / 71 22 54 1

Sweden

Lenze Transmissioner AB
Box 10 74, S-58110 Linköping
Phone ++46 (0)13 / 35 58 00
Telefax ++46 (0)13 / 10 36 23

Switzerland

Lenze Bachofen AG, Ackerstraße 42,
Postfach, CH-8610 Uster-Zürich
Phone ++41 (0)1 / 94 41 21 2
Telefax ++41 (0)1 / 94 41 23 3

Vente Suisse Romande:
Route de Prilly 25, CH-1023 Crissier
Phone ++41 (0)21 / 63 72 19 0
Telefax ++41 (0)21 / 63 72 19 9

Taiwan

ACE Pillar Trading Co. Ltd.
No.12, Lane 61, Sec. 1
Kuanfu Road, San-Chung City
R.O.C. Taipei HSIEN, Taiwan
Phone ++886 (0)2 / 299 58 40 0
Telefax ++886 (0)2 / 299 53 46 6

Thailand

Weinmann & Schneider Co., Ltd.
429 Moo 7, Theparak Road
Tambol Theparak, Amphur Muang
Samutprakarn 10270, Thailand
Phone ++66 (0)2 / 38 35 13 4 / 38 35 63 36
38 36 60 68 / 38 36 57 6
Telefax ++66 (0)2 / 38 35 63 7

Turkey

ELINTAŞ
Elk.Yat.Mak.San. ve Tic.A.Ş.
Mumhane Cad. Eltem Han. No:62
TR-80030 Karaköy/Istanbul
Phone ++90 (0)212 / 293 34 22
Telefax ++90 (0)212 / 249 13 21

United Kingdom/Eire

Simplatroll Ltd., Caxton Road
Bedford MK 41 OHT, United Kingdom/Eire
Phone ++44 (0)1234 / 35 00 44
Telefax ++44 (0)1234 / 26 18 15

USA

Lenze Corp.
175 Route 46 West
USA-Fairfield NJ 07004
Phone ++1 973 / 227-5311
Telefax ++1 973 / 227-7423

Lenze Corp.
1730 East Logan Avenue
USA-Emporia KS 66 801
Phone ++1 316 / 34 38 40 1
Telefax ++1 316 / 34 22 59 5

Lenze Corp.
136 Summit Avenue
USA-Montvale NJ 07645
Phone ++1 201 / 505-9157
Telefax ++1 201 / 505-9162

Lenze Corp.
2221 Peachtree Rd. N.E.
USA-Atlanta, GA 30309
Phone ++1 404 / 605-0753
Telefax ++1 404 / 609-9818

Yugoslavia

see Macedonia